
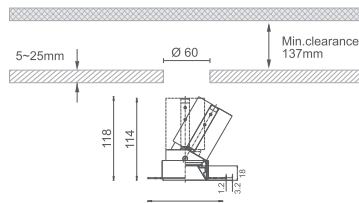
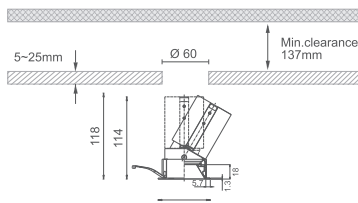
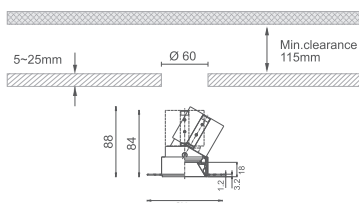


7W- 10W

MILAN R-3.1

10.5W- 14W

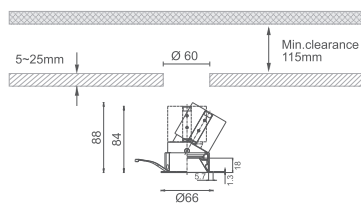

TR - Trim Adjustable

TS - Trimless Adjustable





TR - Trim Adjustable

TS - Trimless Adjustable

7W- 10W

MILAN R-3.2

10.5W- 14W

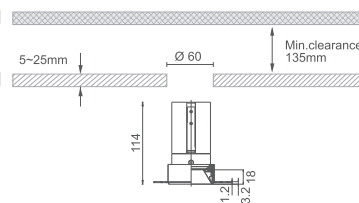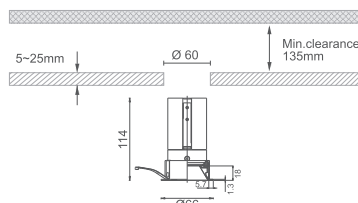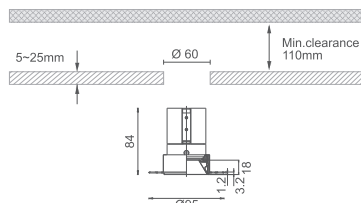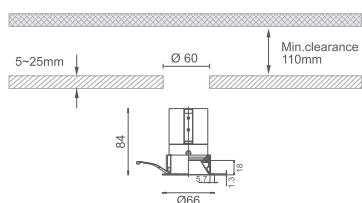

TR - Trim Fixed

TS - Trimless Fixed

TR - Trim Fixed

TS - Trimless Fixed

MILAN R-III

EN

This LED 5W/6.5W/8.5W (CITIZEN LED) architectural lighting fixture offers a blend of high performance and versatile design, ideal for sophisticated lighting needs. It features a durable front ring in white and black and an IP rating of 20 or 54, ensuring reliability in various settings. With CCT options ranging from 2700K to 6000K and a CRI above 90, it provides accurate, quality illumination. Control systems include on/off, DALI, 0/1-10V, and Triac for seamless integration. Standard reflectors are available in white, black, silver, black chrome, grey, golden, bronze, and wood. The fixture offers a beam range of 8° to 55° and optical accessories such as honeycomb louver (E01), spread lens (E02), diffusion lens (E03), and clear lens (E04), all achieving IP54 protection for enhanced adaptability.

IT

Questo apparecchio di illuminazione architettonica a LED 5W/6,5W/8,5W (CITIZEN LED) offre una combinazione di alte prestazioni e design versatile, ideale per esigenze di illuminazione sofisticate. È dotato di un anello frontale resistente in bianco e nero e di un grado di protezione IP di 20 o 54, che garantisce l'affidabilità in vari ambienti. Con opzioni CCT che vanno da 2700K a 6000K e un CRI superiore a 90, fornisce un'illuminazione accurata e di qualità. I sistemi di controllo includono on/off, DALI, 0/1-10V e Triac per una perfetta integrazione. I riflettori standard sono disponibili in bianco, nero, argento, cromo nero, grigio, oro, bronzo e legno. L'apparecchio offre una gamma di fascio da 8° a 55° e accessori ottici come la feritoia a nido d'ape (E01), la lente di diffusione (E02), la lente di diffusione (E03) e la lente trasparente (E04), che raggiungono la protezione IP54 per una maggiore adattabilità.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

Adjustable 3.1	A069	7W - 484lm - 299lm - 8°	A070	7W - 652lm - 499lm - 15°	A071	8W - 922lm - 622lm - 24°	A072	8W - 922lm - 697lm - 36°
	A073	8W - 922lm - 669lm - 45°	A074	8W - 922lm - 655lm - 55°	A075	9W - 815lm - 576lm - 15°	A076	10W - 1067lm - 760lm - 24°
	A077	10W - 1067lm - 842lm - 36°	A078	10W - 1067lm - 828lm - 45°	A079	10W - 1067lm - 792lm - 55°		
	A080	10.5W - 951lm - 639lm - 15°	A081	11.5W - 1320lm - 843lm - 24°	A082	11.5W - 1320lm - 976lm - 36°	A083	11.5W - 1320lm - 905lm - 45°
	A084	11.5W - 1320lm - 885lm - 55°	A085	12.5W - 1087lm - 695lm - 15°	A086	14W - 1650lm - 1037lm - 24°	A087	14W - 1650lm - 1142lm - 36°
	A088	14W - 1650lm - 1116lm - 45°	A089	14W - 1650lm - 1082lm - 55°				
Fixed 3.2	F069	7W - 484lm - 299lm - 8°	F070	7W - 652lm - 499lm - 15°	F071	8W - 922lm - 622lm - 24°	F072	8W - 922lm - 697lm - 36°
	F073	8W - 922lm - 669lm - 45°	F074	8W - 922lm - 655lm - 55°	F075	9W - 815lm - 576lm - 15°	F076	10W - 1067lm - 760lm - 24°
	F077	10W - 1067lm - 842lm - 36°	F078	10W - 1067lm - 828lm - 45°	F079	10W - 1067lm - 792lm - 55°		
	F080	10.5W - 951lm - 639lm - 15°	F081	11.5W - 1320lm - 843lm - 24°	F082	11.5W - 1320lm - 976lm - 36°	F083	11.5W - 1320lm - 905lm - 45°
	F084	11.5W - 1320lm - 885lm - 55°	F085	12.5W - 1087lm - 695lm - 15°	F086	14W - 1650lm - 1037lm - 24°	F087	14W - 1650lm - 1142lm - 36°
	F088	14W - 1650lm - 1116lm - 45°	F089	14W - 1650lm - 1082lm - 55°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD

### Code Example

A001 TA W K1 1 A Y

### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY

#### Optical Accessories

OR01



Honeycomb Louver

OR02



Spread Lens

OR03



Diffusion Lens

OR04



Clear Lens

#### Colour(Reflector)



White



Black



Silver



Black  
Chrome



Grey



Golden




Bronze




Wood


7W/8°/3000K/Ra90




7W/15°/3000K/Ra90




8W/24°/3000K/Ra90




8W/36°/3000K/Ra90

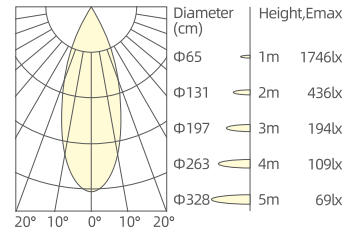


8W/45°/3000K/Ra90




8W/55°/3000K/Ra90




9W/15°/3000K/Ra90




10W/24°/3000K/Ra90

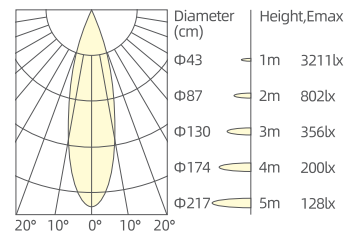


10W/36°/3000K/Ra90




10W/45°/3000K/Ra90




10W/55°/3000K/Ra90




10.5W/15°/3000K/Ra90

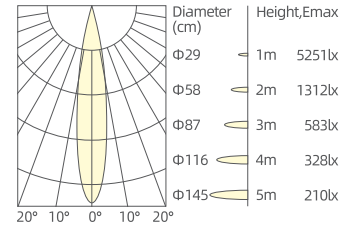


11.5W/24°/3000K/Ra90




11.5W/36°/3000K/Ra90




11.5W/45°/3000K/Ra90




11.5W/55°/3000K/Ra90

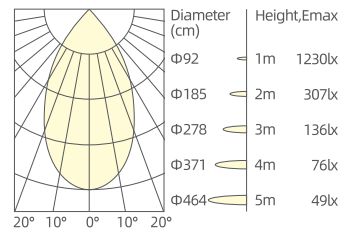


12.5W/15°/3000K/Ra90




14W/24°/3000K/Ra90



14W/36°/3000K/Ra90



14W/45°/3000K/Ra90

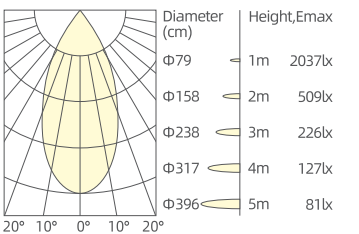

14W/55°/3000K/Ra90

