



MILAN R-6.1

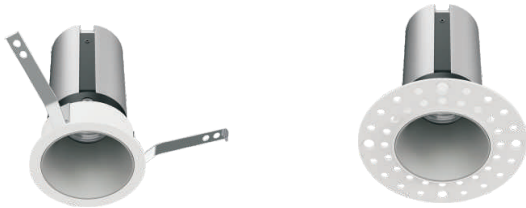

MILAN R-6.2

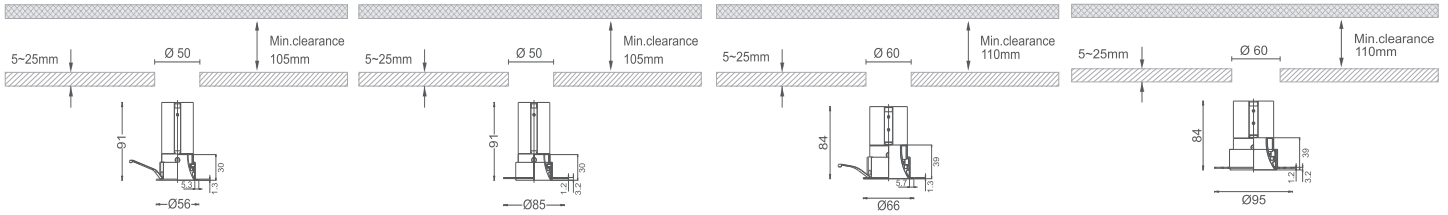


TR - Trim Fixed

TS - Trimless Fixed

TR - Trim Fixed

TS - Trimless Fixed

MILAN R-6.3

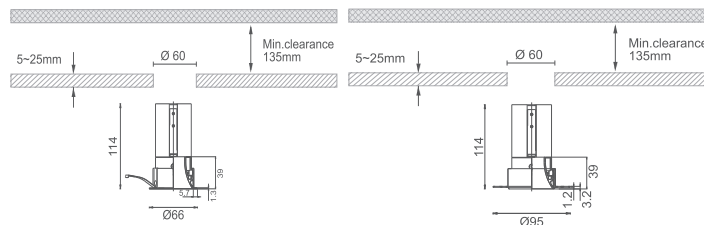

TR - Trim Fixed

TS - Trimless Fixed

MILAN R-VI

EN

The LED 4.5W/6.5W/8W (Citizen LED) Architectural Lighting fixture provides efficient illumination with LED power options of 6.5W and 8W and a system power range of 7W to 9W. It achieves LED output between 660lm to 815lm and system output from 445lm to 638lm. Available beam angles of 15°, 24°, 36°, and 45° ensure flexibility for various applications. With a 3000K CCT with an extended range of 2700K to 6000K and CRI over 90, this fixture offers high-quality color accuracy. The drive range is 34V 200mA to 32V 250mA. Reflectors come in white, black, silver, black chrome, grey, golden, bronze, and wood, complemented by white or black front rings. It has IP20 and IP54 ratings for different environments. Control options include On/Off, DALI, 0/1-10V, and TRIAC. Additional optical accessories such as E01 honeycomb louver, E02 spread lens, E03 diffusion lens, and E04 clear lens are available, providing protection up to IP54.

IT

L'apparecchio di illuminazione architettonica a LED da 4,5 W/6,5 W/8 W (Citizen LED) fornisce un'illuminazione efficiente con opzioni di potenza LED da 6,5 W e 8 W e una gamma di potenza del sistema da 7 W a 9 W. Raggiunge un'uscita LED compresa tra 660 lm e 815 lm e un'uscita del sistema da 445 lm a 638 lm. Gli angoli di emissione disponibili di 15°, 24°, 36° e 45° garantiscono flessibilità per varie applicazioni. Con un CCT da 3000K con una gamma estesa da 2700K a 6000K e un CRI superiore a 90, questo apparecchio offre una precisione del colore di alta qualità. La gamma di azionamento è compresa tra 34 V 200 mA e 32 V 250 mA. I riflettori sono disponibili in bianco, nero, argento, cromo nero, grigio, oro, bronzo e legno, completati da anelli frontali bianchi o neri. Ha un grado di protezione IP20 e IP54 per diversi ambienti. Le opzioni di controllo includono On/Off, DALI, 0/1-10V e TRIAC. Sono disponibili accessori ottici aggiuntivi come la feritoia a nido d'ape E01, la lente di diffusione E02, la lente di diffusione E03 e la lente trasparente E04, che forniscono una protezione fino a IP54.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN R-6.1	A126	7W - 660lm - 445lm - 15°	A127	7W - 652lm - 557lm - 24°	A128	7W - 652lm - 604lm - 36°	A129	7W - 652lm - 551lm - 45°
	A130	9W - 792lm - 581lm - 15°	A131	9W - 815lm - 647lm - 24°	A132	9W - 815lm - 661lm - 36°	A133	9W - 815lm - 638lm - 45°
MILAN R-6.2	A134	7W - 484lm - 301lm - 8°	A135	7W - 652lm - 481lm - 15°	A136	8W - 922lm - 630lm - 24°	A137	8W - 922lm - 685lm - 36°
	A138	8W - 922lm - 682lm - 45°	A139	9W - 815lm - 596lm - 15°	A140	10W - 1067lm - 759lm - 24°	A141	10W - 1067lm - 837lm - 36°
	A142	10W - 1067lm - 822lm - 45°						
MILAN R-6.3	A143	10.5W - 951lm - 679lm - 15°	A144	11.5W - 1320lm - 867lm - 24°	A145	11.5W - 1320lm - 918lm - 36°	A146	11.5W - 1320lm - 955lm - 45°
	A147	12.5W - 1087lm - 628lm - 15°	A148	14W - 1650lm - 1035lm - 24°	A149	14W - 1650lm - 1163lm - 36°	A150	14W - 1650lm - 1144lm - 45°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)			
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK		
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME		
		K5 - 5000K /90	K6 - 2700-6000K /90					E - BLUETOOTH H	F - ZIGBEE	G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90					G - CASAMBI		BR - BRONZE	WD - WOOD
										T - TRANSPA RENT	BI - BLUE
								P - PINK	O - ORANGE		

Code Example

A001 TA W K11 A Y

Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


Optical Accessories




Colour(Reflector)




7W/8°/3000K/Ra90




7W/15°/3000K/Ra90




7W/24°/3000K/Ra90




7W/36°/3000K/Ra90

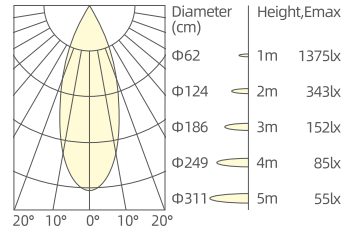


7W/45°/3000K/Ra90




8W/24°/3000K/Ra90




8W/36°/3000K/Ra90




8W/45°/3000K/Ra90

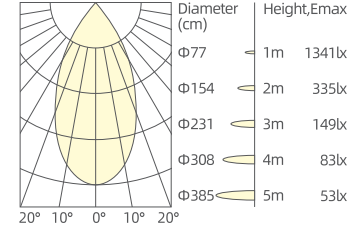


9W/15°/3000K/Ra90




9W/24°/3000K/Ra90




9W/36°/3000K/Ra90




9W/45°/3000K/Ra90

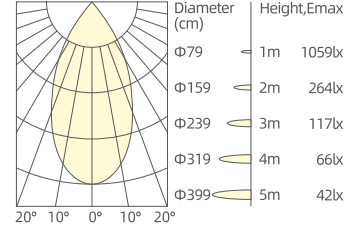


10W/24°/3000K/Ra90




10W/36°/3000K/Ra90




10W/45°/3000K/Ra90




12.5W/15°/3000K/Ra90

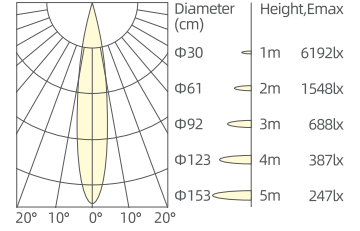


14W/24°/3000K/Ra90



14W/36°/3000K/Ra90



14W/45°/3000K/Ra90






Deep cup

Glare Cut: 45°
UGR: < 19

45°
Glare Cut

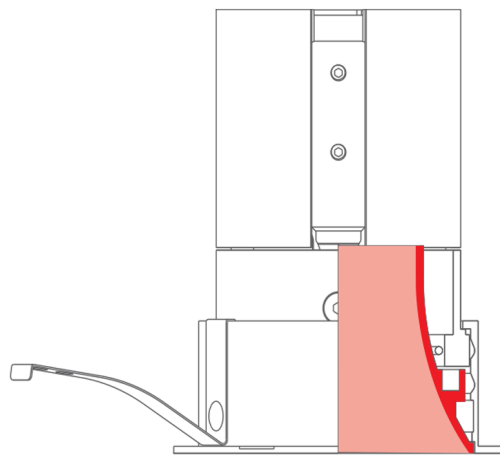

Decorative blackout cup



Transparent



Blue



Pink



Orange



White



Black



Silver



Black chrome



Grey



Golden




Bronze




Wood

Decorative blackout cup



The application of decorative shading cups not only satisfies the lighting function of lamps, but also achieves decorative effects, creating a sense of spatial atmosphere.

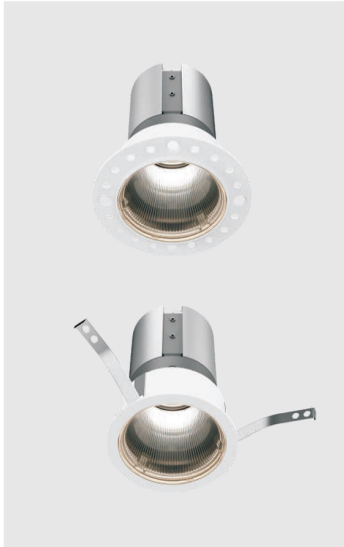



Transparent

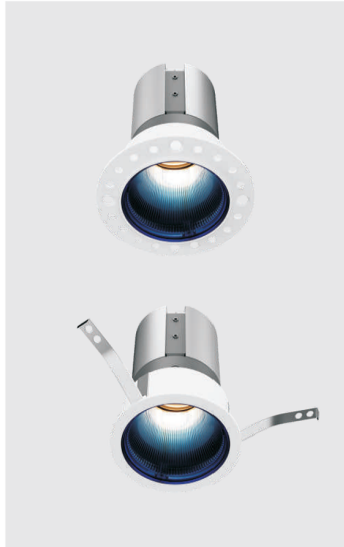

Blue

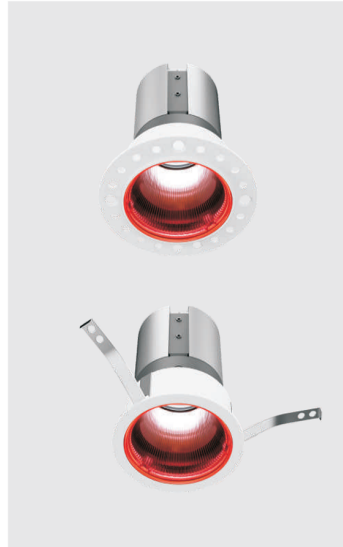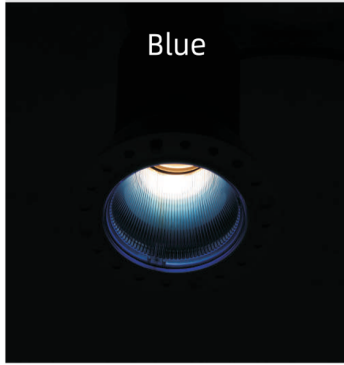

Pink

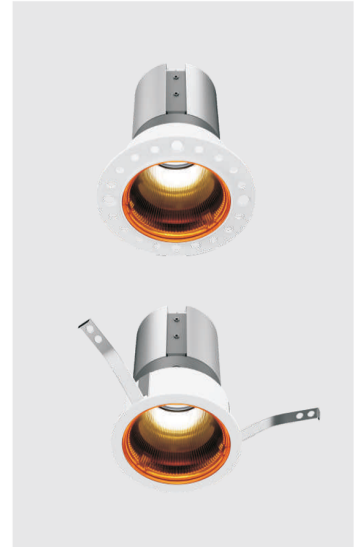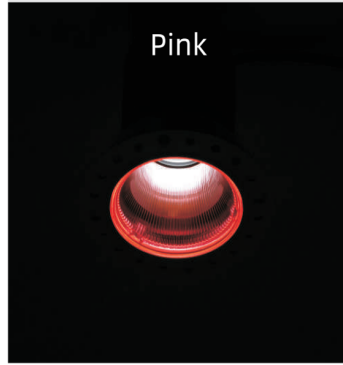

Orange

