
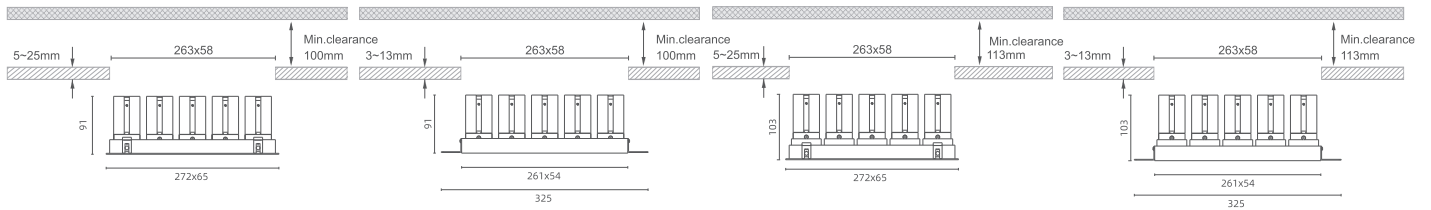


MILAN S-18.1

MILAN S-18.2

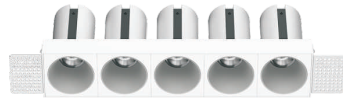

TR - Trim Fixed

TS - Trimless Fixed

TR - Trim Fixed

TS - Trimless Fixed

MILAN S-XVIII

EN

CITIZEN LED 4.5W/6.5W/8W Architectural Lighting: CITIZEN LED architectural lighting delivers outstanding performance and adaptability, making it ideal for professional and modern applications. With LED power ranging from 5x6.5W to 5x8W and system power of 5x7W to 5x9W, it offers luminous efficiency with LED output from 3300lm to 4075lm and system output between 2225lm and 33055lm. The beam angles (15°, 24°, 36°, and 45°) provide flexibility in illumination. With a CRI >90 and a standard CCT of 3000K, it supports CCT customization from 2700K to 6000K. The drive specifications are 34V 200mA to 32V 250mA. Its control systems include On/Off, DALI, 0/1-10V, and TRIAC. Front rings are available in white or black, while reflectors come in white, black, silver, grey and black chrome finishes. Rated IP20 and IP54, it features versatile optical protection options like honeycomb louver, spread, diffusion, and clear lenses; ensuring style and durability for any setting.

IT

Illuminazione architettonica CITIZEN LED 4,5 W/6,5 W/8 W: l'illuminazione architettonica CITIZEN LED offre prestazioni e adattabilità eccezionali, rendendola ideale per applicazioni professionali e moderne. Con una potenza del LED che va da 5x6,5W a 5x8W e una potenza del sistema da 5x7W a 5x9W, offre un'efficienza luminosa con uscita LED da 3300lm a 4075lm e potenza del sistema tra 2225lm e 33055lm. Gli angoli del fascio (15°, 24°, 36° e 45°) offrono flessibilità nell'illuminazione. Con un CRI >90 e un CCT standard di 3000K, supporta la personalizzazione CCT da 2700K a 6000K. Le specifiche dell'azionamento sono da 34 V 200 mA a 32 V 250 mA. I suoi sistemi di controllo includono On/Off, DALI, 0/1-10V e TRIAC. Gli anelli frontali sono disponibili in bianco o nero, mentre i riflettori sono disponibili nelle finiture cromo bianco, nero, argento, grigio e nero. Classificato IP20 e IP54, è dotato di versatili opzioni di protezione ottica come feritoie a nido d'ape, diffusione, diffusione e lenti trasparenti; garantendo stile e durata per qualsiasi ambiente.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-18.1	A904	5x7W - 3300lm - 2225lm - 15°	A905	5x7W - 3260lm - 2785lm - 24°	A906	5x7W - 3260lm - 3020lm - 36°	A907	5x7W - 3260lm - 2755lm - 45°
	A908	5x9W - 3960lm - 2905lm - 15°	A909	5x9W - 4075lm - 3235lm - 24°	A910	5x9W - 4075lm - 3305lm - 36°	A911	5x9W - 4075lm - 3190lm - 45°
MILAN S-18.2	A912	5x7W - 3300lm - 2225lm - 15°	A913	5x7W - 3260lm - 2785lm - 24°	A914	5x7W - 3260lm - 3020lm - 36°	A915	5x7W - 3260lm - 2755lm - 45°
	A916	5x9W - 3960lm - 2905lm - 15°	A917	5x9W - 4075lm - 3235lm - 24°	A918	5x9W - 4075lm - 3305lm - 36°	A919	5x9W - 4075lm - 3190lm - 45°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


5x7W/15°/3000K/Ra90

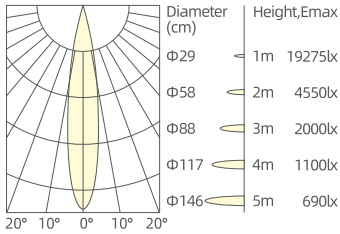


5x7W/24°/3000K/Ra90

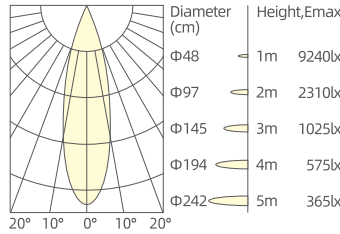


5x7W/36°/3000K/Ra90

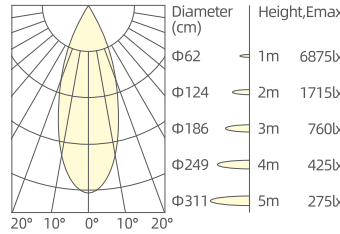


5x7W/45°/3000K/Ra90

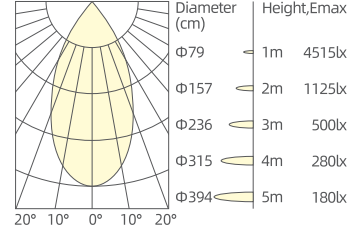


5x9W/15°/3000K/Ra90

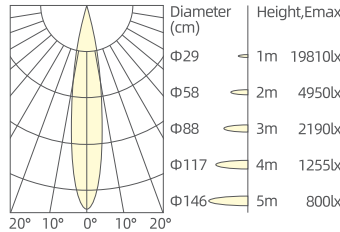


5x9W/24°/3000K/Ra90

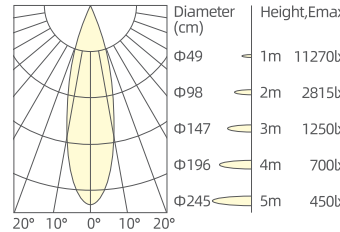

5x9W/36°/3000K/Ra90

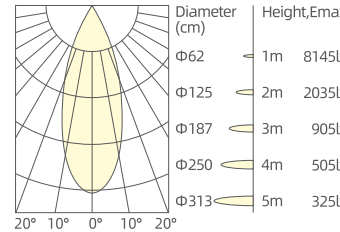

5x9W/45°/3000K/Ra90

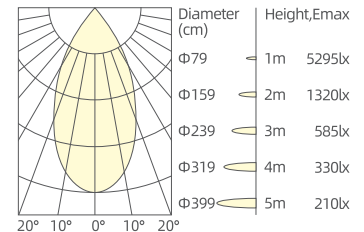

Optical Accessories



Colour(Reflector)

