
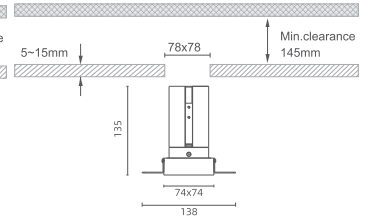
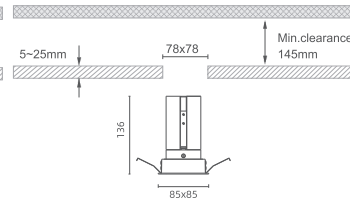
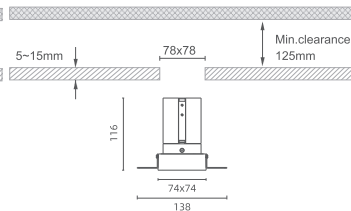


7W- 12W

MILAN R-19.1

12.5W- 20W



TR - Trim Fixed

TS - Trimless Fixed





TR - Trim Fixed

TS - Trimless Fixed

7W- 12W

MILAN R-19.2

12.5W- 20W

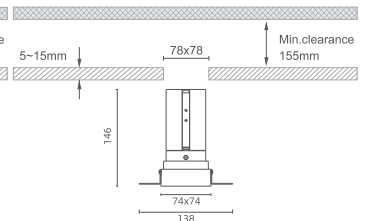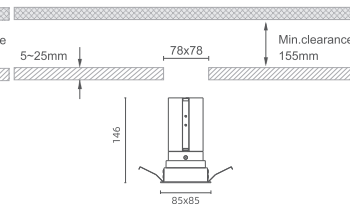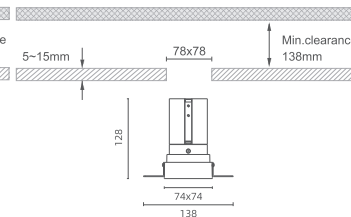

TR - Trim Fixed

TS - Trimless Fixed

TR - Trim Fixed

TS - Trimless Fixed

MILAN S-XIX

EN

The Citizen LED 8.5W/10W Architectural Lighting offers efficient lighting with LED power ranging from 6W to 10W and system power from 9W to 11.5W. It delivers LED output from 484lm to 1320lm and system output between 360lm and 1077lm. With beam angles of 6°, 10°, 15°, 20°, 30°, 40°, and 50°, it provides versatile lighting solutions. The normal CCT is 3000K, with a range from 2700K to 6000K and a CRI >90 for superior color rendering. The drive operates from 12V 500mA to 34V 300mA. Reflectors are available in white, black, silver, black chrome, and grey. It offers IP20 and IP54 protection with honeycomb louver, spread lens, diffusion lens, and clear lenses. Control systems include On/Off, DALI, 0/1-10V, and TRIAC. Front rings come in white and black.

un'illuminazione efficiente con potenze LED che vanno da 6W a 10W e potenze di sistema da 9W a 11,5W. Fornisce un'uscita LED da 484 lm a 1320 lm e un'uscita del sistema tra 360 lm e 1077 lm. Con angoli di emissione di 6°, 10°, 15°, 20°, 30°, 40° e 50°, offre soluzioni di illuminazione versatili. Il CCT normale è 3000K, con un intervallo da 2700K a 6000K e un CRI >90 per una resa cromatica superiore. L'azionamento funziona da 12V 500mA a 34V 300mA. I riflettori sono disponibili in bianco, nero, argento, cromo nero e grigio. Offre protezione IP20 e IP54 con feritoia a nido d'ape, lente di diffusione, lente di diffusione e lenti trasparenti. I sistemi di controllo includono On/Off, DALI, 0/1-10V e TRIAC. Gli anelli anteriori sono disponibili in bianco e nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-19.1	A920	7W - 484lm - 360lm - 6°	A921	9W - 951lm - 702lm - 15°	A922	10W - 1067lm - 908lm - 20°	A923	10W - 1067lm - 919lm - 30°
	A924	10W - 1067lm - 927lm - 40°	A925	10W - 1067lm - 895lm - 50°	A926	10.5W - 1087lm - 767lm - 15°	A927	11W - 792lm - 574lm - 10°
	A928	11.5W - 1320lm - 1034lm - 20°	A929	11.5W - 1320lm - 1070lm - 30°	A930	11.5W - 1320lm - 1077lm - 40°	A931	11.5W - 1320lm - 1056lm - 50°
	A932	12W - 946lm - 666lm - 10°						
MILAN S-19.1	A933	12.5W - 1087lm - 890lm - 15°	A934	14W - 1650lm - 1271lm - 20°	A935	14W - 1650lm - 1299lm - 30°	A936	14W - 1650lm - 1298lm - 40°
	A937	14W - 1650lm - 1269lm - 50°	A938	14.5W - 946lm - 707lm - 10°	A939	20W - 1926lm - 1196lm - 15°	A940	20W - 2343lm - 1756lm - 20°
	A941	20W - 2343lm - 1789lm - 30°	A942	20W - 2343lm - 1824lm - 40°	A943	20W - 2343lm - 1805lm - 50°		
MILAN S-19.2	A944	7W - 484lm - 360lm - 6°	A945	9W - 951lm - 702lm - 15°	A946	10W - 1067lm - 908lm - 20°	A947	10W - 1067lm - 919lm - 30°
	A948	10W - 1067lm - 927lm - 40°	A949	10W - 1067lm - 895lm - 50°	A950	10.5W - 1087lm - 767lm - 15°	A951	11W - 792lm - 574lm - 10°
	A952	11.5W - 1320lm - 1034lm - 20°	A953	11.5W - 1320lm - 1070lm - 30°	A954	11.5W - 1320lm - 1077lm - 40°	A955	11.5W - 1320lm - 1056lm - 50°
	A956	12W - 946lm - 666lm - 10°						
MILAN S-19.2	A957	12.5W - 1087lm - 890lm - 15°	A958	14W - 1650lm - 1271lm - 20°	A959	14W - 1650lm - 1299lm - 30°	A960	14W - 1650lm - 1298lm - 40°
	A961	14W - 1650lm - 1269lm - 50°	A962	14.5W - 946lm - 707lm - 10°	A963	20W - 1926lm - 1196lm - 15°	A964	20W - 2343lm - 1756lm - 20°
	A965	20W - 2343lm - 1789lm - 30°	A966	20W - 2343lm - 1824lm - 40°	A967	20W - 2343lm - 1805lm - 50°		

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K1 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


11W/10°/3000K/Ra90




9W/15°/3000K/Ra90




10W/20°/3000K/Ra90




10W/30°/3000K/Ra90

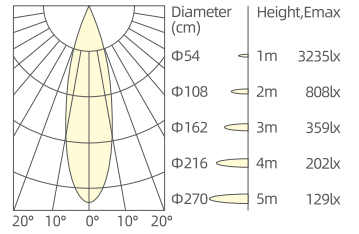


10W/40°/3000K/Ra90




10W/50°/3000K/Ra90




14W/10°/3000K/Ra90




12.5W/15°/3000K/Ra90

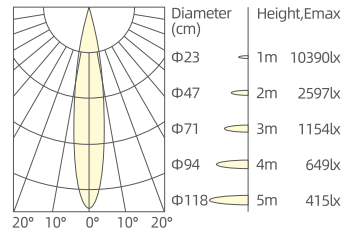


14W/20°/3000K/Ra90




14W/30°/3000K/Ra90



14W/40°/3000K/Ra90



14W/50°/3000K/Ra90

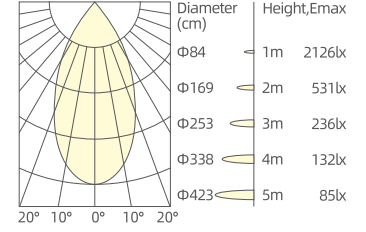

Optical Accessories

OR01



Honeycomb Louver

OR02



Spread Lens

OR03



Diffusion Lens

OR04



Clear Lens

Colour(Reflector)



White



Black



Silver



Black chrome



Grey



Golden



Bronze



Wood



Transparent



Blue



Pink



Orange