
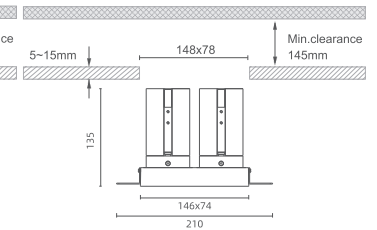




20W- 24W

MILAN R-20.1

25W- 40W



TR - Trim Fixed

TS - Trimless Fixed





TR - Trim Fixed

TS - Trimless Fixed

20W- 24W

MILAN R-20.2

25W- 40W

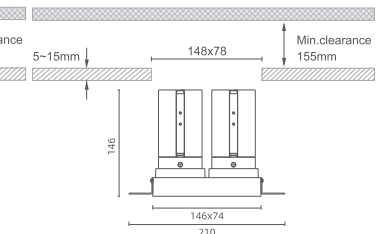

TR - Trim Fixed

TS - Trimless Fixed

TR - Trim Fixed

TS - Trimless Fixed

MILAN S-XX

EN

The Citizen LED 8.5/10W Architectural Lighting delivers powerful, adaptable lighting with LED power options from 2x6W to 2x10W and system power from 2x7W to 2x11.5W. Offering LED output from 968lm to 2640lm and system output from 720lm to 2154lm, this light meets a range of brightness needs. The drive operates from 12V 500mA to 34V 300mA. Beam angles from 6° to 50° allow for flexible light distribution, and standard color temperature (CCT) ranges from 2700K to 6000K, with a CRI over 90 for accurate color representation. The drive operates from 12V 500mA to 34V 300mA. Available with IP20 and IP54 ratings, it includes optical protection options such as honeycomb louver, spread, diffusion, and clear lenses. Reflectors come in white, black, silver, black chrome, and grey, while front rings are available in white and black. Control options include On/Off, DALI, 0/1-10V, and TRIAC.

IT

L'illuminazione architettonica Citizen LED 8,5/10W offre un'illuminazione potente e adattabile con opzioni di potenza LED da 2x6W a 2x10W e potenza di sistema da 2x7W a 2x11,5W. Con un'uscita LED da 968 lm a 2640 lm e un'uscita di sistema da 720 lm a 2154 lm, questa luce soddisfa una vasta gamma di esigenze di luminosità. L'azionamento funziona da 12V 500mA a 34V 300mA. Gli angoli del fascio da 6° a 50° consentono una distribuzione flessibile della luce e la temperatura di colore standard (CCT) varia da 2700K a 6000K, con un CRI superiore a 90 per una rappresentazione accurata dei colori. L'azionamento funziona da 12V 500mA a 34V 300mA. Disponibile con grado di protezione IP20 e IP54, include opzioni di protezione ottica come feritoie a nido d'ape, diffusione, diffusione e lenti trasparenti. I riflettori sono disponibili in bianco, nero, argento, cromo nero e grigio, mentre gli anelli anteriori sono disponibili in bianco e nero. Le opzioni di controllo includono On/Off, DALI, 0/1-10V e TRIAC.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-20.1	A968	2x10W - 2134lm - 1816lm - 20°	A969	2x10W - 2134lm - 1838lm - 30°	A970	2x10W - 2134lm - 1854lm - 40°	A971	2x10W - 2134lm - 1790lm - 50°
	A972	2x10.5W - 2174lm - 1534lm - 15°	A973	2x11W - 1584lm - 1148lm - 10°	A974	2x11.5W - 2640lm - 2068lm - 20°	A975	2x11.5W - 2640lm - 2112lm - 50°
	A976	2x11.5W - 2640lm - 2140lm - 30°	A977	2x11.5W - 2640lm - 2154lm - 40°	A978	2x12W - 1892lm - 1332lm - 10°		
MILAN S-20.1	A981	2x12.5W - 2174lm - 1780lm - 15°	A982	2x14W - 3300lm - 2542lm - 20°	A983	2x14W - 3300lm - 2598lm - 30°	A984	2x14W - 3300lm - 2596lm - 40°
	A985	2x14W - 3300lm - 2538lm - 50°	A986	2x14.5W - 1892lm - 1414lm - 10°	A987	2x20W - 3852lm - 2392lm - 15°	A988	2x20W - 4686lm - 3512lm - 20°
	A989	2x20W - 4686lm - 3578lm - 30°	A990	2x20W - 4686lm - 3648lm - 40°	A991	2x20W - 4686lm - 3610lm - 50°		
MILAN S-20.2	A992	2x10W - 2134lm - 1816lm - 20°	A993	2x10W - 2134lm - 1838lm - 30°	A994	2x10W - 2134lm - 1854lm - 40°	A995	2x10W - 2134lm - 1790lm - 50°
	A996	2x10.5W - 2174lm - 1534lm - 15°	A997	2x11W - 1584lm - 1148lm - 10°	A998	2x11.5W - 2640lm - 2068lm - 20°	A999	2x11.5W - 2640lm - 2112lm - 50°
	B001	2x11.5W - 2640lm - 2140lm - 30°	B002	2x11.5W - 2640lm - 2154lm - 40°	B003	2x12W - 1892lm - 1332lm - 10°		
MILAN S-20.2	B004	2x12.5W - 2174lm - 1780lm - 15°	B005	2x14W - 3300lm - 2542lm - 20°	B006	2x14W - 3300lm - 2598lm - 30°	B007	2x14W - 3300lm - 2596lm - 40°
	B008	2x14W - 3300lm - 2538lm - 50°	B009	2x14.5W - 1892lm - 1414lm - 10°	B010	2x20W - 3852lm - 2392lm - 15°	B011	2x20W - 4686lm - 3512lm - 20°
	B012	2x20W - 4686lm - 3578lm - 30°	B013	2x20W - 4686lm - 3648lm - 40°	B014	2x20W - 4686lm - 3610lm - 50°		

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


2x11W/10°/3000K/Ra90




2x9W/15°/3000K/Ra90




2x10W/20°/3000K/Ra90




2x10W/30°/3000K/Ra90

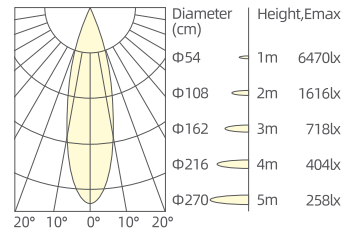


2x10W/40°/3000K/Ra90




2x10W/50°/3000K/Ra90




2x14W/10°/3000K/Ra90




2x12.5W/15°/3000K/Ra90

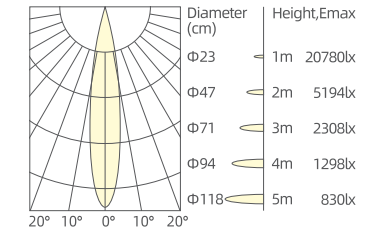


2x14W/30°/3000K/Ra90




2x14W/40°/3000K/Ra90



2x14W/50°/3000K/Ra90



2x14W/20°/3000K/Ra90

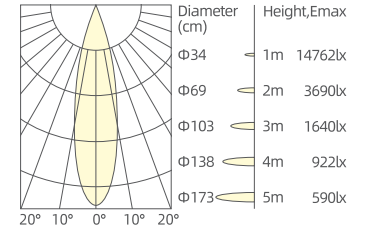

Optical Accessories

- OR01**

Honeycomb Louver
- OR02**

Spread Lens
- OR03**

Diffusion Lens
- OR04**

Clear Lens

Colour(Reflector)

-
-
-
-
-
-
-
-
-
-
-
-