
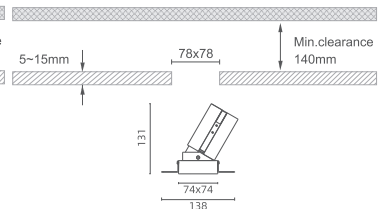

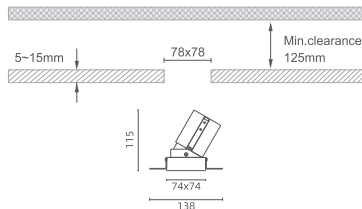


7W- 11.5W

MILAN R-9.1

14.5W- 20W



TR - Trim Adjustable

TS - Trimless Adjustable





TR - Trim Adjustable

TS - Trimless Adjustable

7W- 12W

MILAN R-9.2

12.5W- 20W

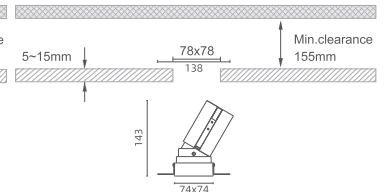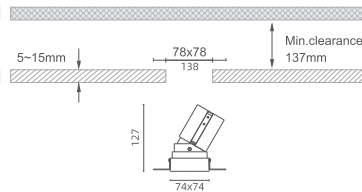

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-IX

EN

The Citizen LED 8.5W/10W Architectural Lighting is designed for versatile and efficient illumination in various settings. With LED power ranging from 6W to 10W and system power from 7W to 11.5W, it delivers an LED output of 484lm to 1320lm and a system output of 352lm to 1064lm. This fixture offers a wide selection of beam angles, including 6°, 10°, 15°, 24°, 36°, 45°, and 55°, providing flexibility for diverse lighting applications. Operating at a standard CCT of 3000K and an extended range of 2700K to 6000K, it boasts a high CRI > 90 for excellent color rendering. The drive specification ranges from 12V 500mA to 34V 300mA. Available reflectors in white, black, silver, black chrome, and grey, along with front rings in white and black, enhance its aesthetic versatility. The system includes an IP rating of 20 or 54 and optical protection options like E01 honeycomb louver and E02, E03, and E04 lenses, with control systems that support On/Off, DALI, 0/1-10V, and TRIAC functionality.

IT

L'illuminazione architettonica Citizen LED 8,5W/10W è progettata per un'illuminazione versatile ed efficiente in vari ambienti. Con una potenza LED compresa tra 6 W e 10 W e una potenza del sistema compresa tra 7 W e 11,5 W, offre un'uscita LED da 484 lm a 1320 lm e un'uscita di sistema da 352 lm a 1064 lm. Questo apparecchio offre un'ampia selezione di angoli del fascio, tra cui 6°, 10°, 15°, 24°, 36°, 45° e 55°, offrendo flessibilità per diverse applicazioni di illuminazione. Operando a un CCT standard di 3000K e una gamma estesa da 2700K a 6000K, vanta un CRI elevato > 90 per un'eccellente resa cromatica. Le specifiche dell'azionamento vanno da 12 V 500 mA a 34 V 300 mA. I riflettori disponibili in bianco, nero, argento, cromo nero e grigio, insieme agli anelli frontali in bianco e nero, ne esaltano la versatilità estetica. Il sistema include un grado di protezione IP di 20 o 54 e opzioni di protezione ottica come la feritoia a nido d'ape E01 e le lenti E02, E03 ed E04, con sistemi di controllo che supportano le funzionalità On/Off, DALI, 0/1-10V e TRIAC.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-9.1	A538	7W - 484lm - 352lm - 6°	A539	9W - 951lm - 669lm - 15°	A540	10W - 1067lm - 907lm - 24°	A541	10W - 1067lm - 944lm - 36°
	A542	10W - 1067lm - 931lm - 45°	A543	10W - 1067lm - 932lm - 55°	A544	10.5W - 1087lm - 724lm - 15°	A545	11W - 792lm - 540lm - 10°
	A546	11.5W - 1320lm - 1032lm - 24°	A547	11.5W - 1320lm - 1080lm - 36°	A548	11.5W - 1320lm - 1089lm - 45°	A549	11.5W - 1320lm - 1064lm - 55°
	A550	12W - 946lm - 654lm - 10°						
MILAN S-9.1	A551	12.5W - 1087lm - 858lm - 15°	A552	14W - 1650lm - 1263lm - 24°	A553	14W - 1650lm - 1321lm - 36°	A554	14W - 1650lm - 1310lm - 45°
	A555	14W - 1650lm - 1312lm - 55°	A556	14.5W - 946lm - 697lm - 10°	A557	20W - 1926lm - 1207lm - 15°	A558	20W - 2343lm - 1741lm - 24°
	A559	20W - 2343lm - 1869lm - 36°	A560	20W - 2343lm - 1850lm - 45°	A561	20W - 2343lm - 1821lm - 55°		
MILAN S-9.2	A562	7W - 484lm - 352lm - 6°	A563	9W - 951lm - 669lm - 15°	A564	10W - 1067lm - 907lm - 24°	A565	10W - 1067lm - 944lm - 36°
	A566	10W - 1067lm - 931lm - 45°	A567	10W - 1067lm - 932lm - 55°	A568	10.5W - 1087lm - 724lm - 15°	A569	11W - 792lm - 540lm - 10°
	A570	11.5W - 1320lm - 1032lm - 24°	A571	11.5W - 1320lm - 1080lm - 36°	A572	11.5W - 1320lm - 1089lm - 45°	A573	11.5W - 1320lm - 1064lm - 55°
	A574	12W - 946lm - 654lm - 10°						
MILAN S-9.2	A575	12.5W - 1087lm - 858lm - 15°	A576	14W - 1650lm - 1263lm - 24°	A577	14W - 1650lm - 1321lm - 36°	A578	14W - 1650lm - 1310lm - 45°
	A579	14W - 1650lm - 1312lm - 55°	A580	14.5W - 946lm - 697lm - 10°	A581	20W - 1926lm - 1207lm - 15°	A582	20W - 2343lm - 1741lm - 24°
	A583	20W - 2343lm - 1869lm - 36°	A584	20W - 2343lm - 1850lm - 45°	A585	20W - 2343lm - 1821lm - 55°		

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD

Code Example

A001 TA W K11 A Y

Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


Optical Accessories




Colour(Reflector)




9W/15°/3000K/Ra90




10W/24°/3000K/Ra90




10W/36°/3000K/Ra90




10W/45°/3000K/Ra90

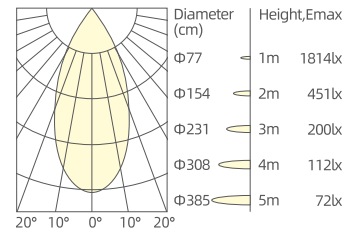


10W/55°/3000K/Ra90




11W/10°/3000K/Ra90




12.5W/15°/3000K/Ra90




14.5W/10°/3000K/Ra90

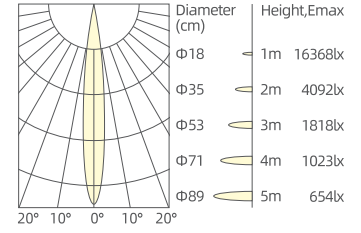


14W/24°/3000K/Ra90




14W/36°/3000K/Ra90




14W/45°/3000K/Ra90




14W/55°/3000K/Ra90

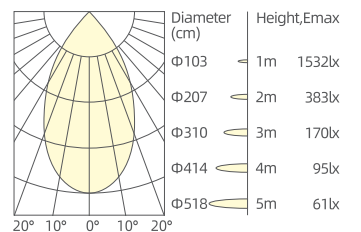


20W/15°/3000K/Ra90




20W/24°/3000K/Ra90



20W/36°/3000K/Ra90



20W/45°/3000K/Ra90

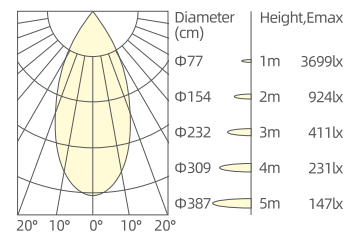

20W/55°/3000K/Ra90

