


TONDO S-15.1

TONDO S-15.2

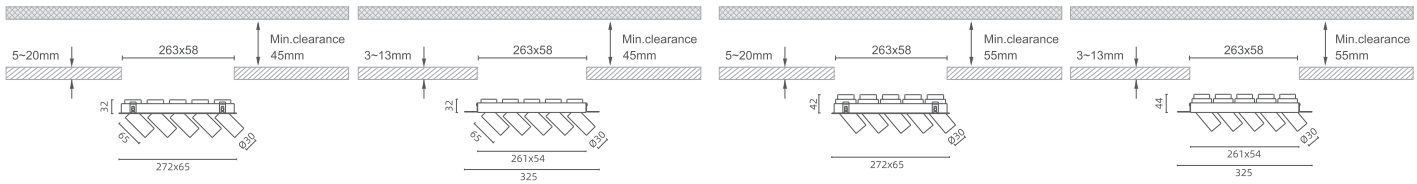

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO R-XV

EN

CITIZEN LED 5.5W/7W Architectural Lighting: The CITIZEN LED 5.5W/7W architectural lighting system combines efficiency and flexibility for diverse lighting needs. With LED power ranging from 3x5.5W to 3x7W and system power from 3x7W to 3x9W, it offers LED output from 1812lm to 2388lm and system output from 912lm to 1782lm. Beam angles of 15°, 24°, and 36° ensure precision lighting, while a CRI greater than 90 ensures excellent color rendering. The standard CCT of 3000K is adjustable from 2700K to 6000K, offering a range of color temperatures. Control options include On/Off, DALI, 0/1-10V, and TRIAC. Available in IP20 and IP54 ratings, with white and black front rings, it includes optical protection such as E01 honeycomb louvers for IP20 and spread, diffusion, or clear lenses for IP54, providing optimal protection and performance.

IT

illuminazione architettonica CITIZEN LED 5.5W/7W: Il sistema di illuminazione architettonica CITIZEN LED 5.5W/7W combina efficienza e flessibilità per le diverse esigenze di illuminazione. Con una potenza LED che va da 3x5,5W a 3x7W e una potenza di sistema da 3x7W a 3x9W, offre un'uscita LED da 1812lm a 2388lm e un'uscita di sistema da 912lm a 1782lm. Gli angoli del fascio di 15°, 24° e 36° garantiscono un'illuminazione di precisione, mentre un CRI superiore a 90 garantisce un'eccellente resa cromatica. Il CCT standard di 3000K è regolabile da 2700K a 6000K, offrendo una gamma di temperature di colore. Le opzioni di controllo includono On/Off, DALI, 0/1-10V e TRIAC. Disponibile con grado di protezione IP20 e IP54, con anelli frontali bianchi e neri, include una protezione ottica come le feritoie a nido d'ape E01 per IP20 e le lenti di diffusione, diffusione o trasparenti per IP54, che forniscono

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

<b>TONDO S-15.1</b>	<b>B198</b>	5x7W - 3020lm - 1520lm - 15°	<b>B199</b>	5x7W - 3020lm - 1850lm - 24°	<b>B200</b>	5x7W - 3020lm - 2035lm - 36°	<b>B201</b>	5x9W - 3980lm - 2030lm - 15°
	<b>B202</b>	5x9W - 3980lm - 2970lm - 24°	<b>B203</b>	5x9W - 3980lm - 2670lm - 36°				
<b>TONDO S-15.2</b>	<b>B204</b>	5x7W - 3020lm - 1520lm - 15°	<b>B205</b>	5x7W - 3020lm - 1850lm - 24°	<b>B206</b>	5x7W - 3020lm - 2035lm - 36°	<b>B207</b>	5x9W - 3980lm - 2030lm - 15°
	<b>B208</b>	5x9W - 3980lm - 2970lm - 24°	<b>B209</b>	5x9W - 3980lm - 2670lm - 36°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


### Code Example

A001 TA W K11 A Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


5x7W/15°/3000K/Ra90

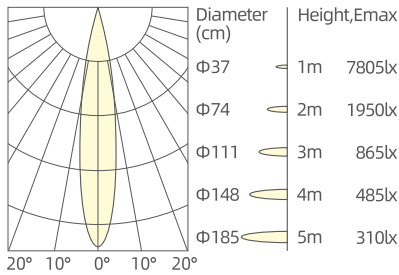


5x7W/24°/3000K/Ra90

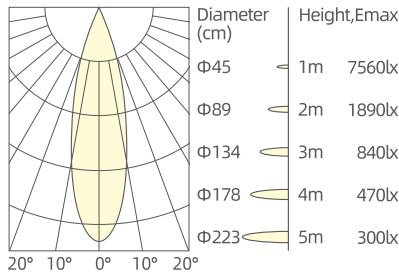


5x7W/36°/3000K/Ra90

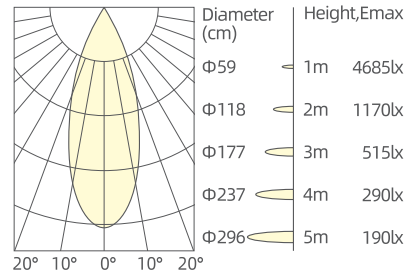


5x9W/15°/3000K/Ra90

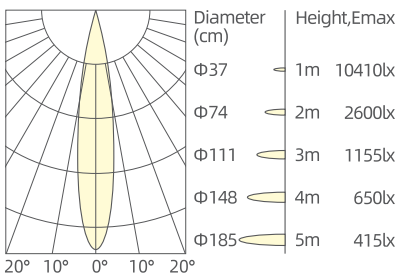

5x9W/24°/3000K/Ra90

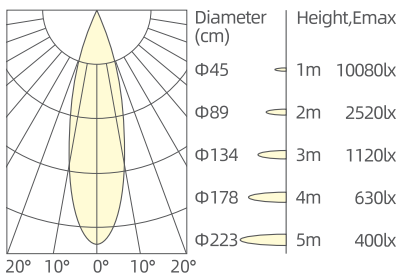

5x9W/36°/3000K/Ra90

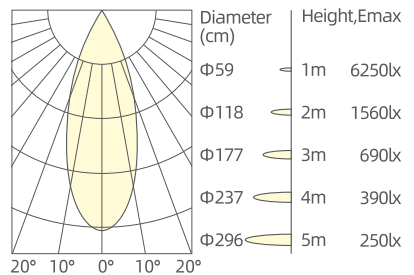

### Optical Accessories

