





FERRARA S-1.1



Trim Fixed




FERRARA S-1.2



Trim Fixed




FERRARA S-1.3



Trim Fixed




FERRARA S-1.4



Trim Fixed



FERRARA S-1.5



Trim Fixed

FERRARA S-I

EN

The CITIZEN LED 6.5W/8W/9.5W Architectural Lighting offers exceptional performance with LED power ranging from 8W to 9.5W and system power from 9W to 11W. It delivers LED output between 822lm and 951lm, and system output from 625lm to 820lm. The beam angles are available in 15°, 24°, 36°, and 60°. Featuring a drive range of 32V 250mA to 32V 300mA, it offers a standard CCT from 2700K to 6000K, with 3000K as the default. The standard IP65 rating ensures durability, while a CRI greater than 90 guarantees accurate color rendering. Lens options include E01 honeycomb louver, E02 spread, E03 diffusion, and E04 clear, designed for both IP20 and IP54 optical protection levels. The control system supports On/Off, DALI, 0/1-10V, and TRIAC, with white and black front ring options.

IT

L'illuminazione architettonica CITIZEN LED 6,5W/8W/9,5W offre prestazioni eccezionali con potenze LED che vanno da 8W a 9,5W e potenze di sistema da 9W a 11W. Fornisce un'uscita LED compresa tra 822 lm e 951 lm e un'uscita di sistema da 625 lm a 820 lm. Gli angoli del fascio sono disponibili in 15°, 24°, 36° e 60°. Dotato di una gamma di azionamento da 32 V 250 mA a 32 V 300 mA, offre un CCT standard da 2700K a 6000K, con 3000K come impostazione predefinita. Il grado di protezione IP65 standard garantisce una lunga durata, mentre un CRI superiore a 90 garantisce una resa cromatica accurata. Le opzioni dell'obiettivo includono la feritoia a nido d'ape E01, la diffusione E02, la diffusione E03 e la luce trasparente E04, progettate per i livelli di protezione ottica IP20 e IP54. Il sistema di controllo supporta On/Off, DALI, 0/1-10V e TRIAC, con opzioni di anello frontale bianco e nero.



FERRARA S-I

Designed to disappear. Meant to be felt.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

FERRARA S-1.1	C121	9W - 822lm - 625lm - 15°	C122	9W - 822lm - 629lm - 24°	C123	9W - 822lm - 631lm - 90°	C124	9W - 822lm - 652lm - 60°
	C125	9W - 822lm - 683lm - 36°	C126	11W - 951lm - 751lm - 15°	C127	11W - 951lm - 754lm - 24°	C128	11W - 951lm - 772lm - 90°
	C129	11W - 951lm - 782lm - 60°	C130	11W - 951lm - 820lm - 36°				
FERRARA S-1.2	C131	11W - 951lm - 657lm - 90°	C132	11W - 951lm - 667lm - 60°	C133	11W - 951lm - 778lm - 24°	C134	11W - 951lm - 782lm - 15°
	C135	11W - 951lm - 811lm - 36°	C136	13W - 1087lm - 754lm - 90°	C137	13W - 1087lm - 764lm - 60°	C138	13W - 1087lm - 889lm - 24°
	C139	13W - 1087lm - 894lm - 15°	C140	13W - 1087lm - 927lm - 36°				
FERRARA S-1.3	C141	25W - 2569lm - 1422lm - 90°	C142	25W - 2569lm - 1522lm - 60°	C143	25W - 2569lm - 1771lm - 24°	C144	25W - 2569lm - 1782lm - 15°
	C145	25W - 2569lm - 1846lm - 36°	C146	30W - 2940lm - 1670lm - 90°	C147	30W - 2940lm - 1780lm - 60°	C148	30W - 2940lm - 2072lm - 24°
	C149	30W - 2940lm - 2084lm - 15°	C150	30W - 2940lm - 2159lm - 36°				
FERRARA S-1.4	C151	36W - 3960lm - 2612lm - 90°	C152	36W - 3960lm - 2648lm - 15°	C153	36W - 3960lm - 2712lm - 24°	C154	36W - 3960lm - 2732lm - 60°
	C155	36W - 3960lm - 2775lm - 36°	C156	41W - 4160lm - 3031lm - 90°	C157	41W - 4160lm - 3045lm - 15°	C158	41W - 4160lm - 3118lm - 24°
	C159	41W - 4160lm - 3141lm - 60°	C160	41W - 4160lm - 3191lm - 36°				
FERRARA S-1.5	C161	50W - 5193lm - 3450lm - 90°	C162	50W - 5193lm - 3560lm - 50°	C163	50W - 5193lm - 3630lm - 20°	C164	50W - 5193lm - 3729lm - 30°
	C165	50W - 5193lm - 3828lm - 36°	C166	60W - 5944lm - 3031lm - 90°	C167	60W - 5944lm - 3045lm - 20°	C168	60W - 5944lm - 3118lm - 30°
	C169	60W - 5944lm - 3141lm - 50°	C170	60W - 5944lm - 3191lm - 36°				

Mode	CCT/CRI		Dim		Colour (Reflector)	
	TF - Trim Fixed	K5 - 5000K /90	K4 - 4000K /90	Y- Yes	N- No	W - WHITE
	K3 - 3500K /90	K2 - 3000K /90			S - SILVER	BC - BLACK CHROME
	K1 - 2700K /90					


Code Example

A001 TA W K11 A Y


Enter Your Code:




9W/15°/3000K/Ra90




9W/24°/3000K/Ra90




9W/36°/3000K/Ra90




9W/60°/3000K/Ra90

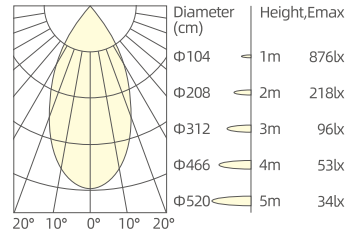


11W/15°/3000K/Ra90




11W/24°/3000K/Ra90




11W/36°/3000K/Ra90




11W/60°/3000K/Ra90

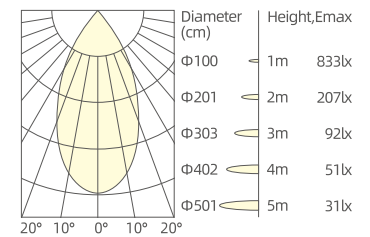


30W/15°/3000K/Ra90




30W/24°/3000K/Ra90




30W/36°/3000K/Ra90




30W/60°/3000K/Ra90

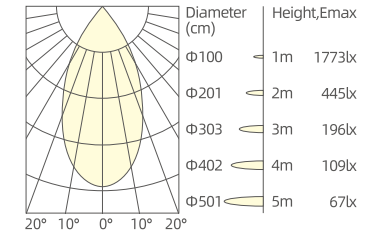


41W/15°/3000K/Ra90




41W/24°/3000K/Ra90




41W/36°/3000K/Ra90




41W/60°/3000K/Ra90

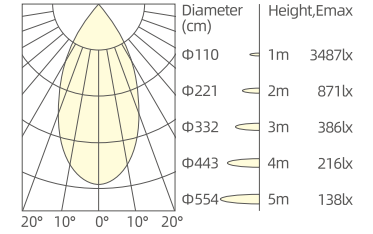


60W/20°/3000K/Ra90




60W/30°/3000K/Ra90



60W/36°/3000K/Ra90



60W/50°/3000K/Ra90

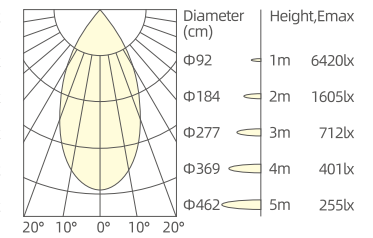

Optical Accessories



Colour(Reflector)



White

Black

Silver

Black chrome