

LUCCA-1.1

LUCCA-1.2

LUCCA-1.3

LUCCA-1.4



LUCCA-I

EN

The CITIZEN-LED 7W/8.5W/10W Architectural Lighting provides efficient and versatile illumination, with LED power ranging from 7W to 10W and system output from 318lm to 1034lm. Beam angles of 8°, 15°, 24°, 36°, and 60° offer flexible lighting solutions for various applications. The fixture supports a CCT range from 2700K to 6000K, with 3000K as the standard for warm, inviting light. With CRI > 90, it ensures accurate color rendering. Rated IP20 and IP54, it is durable for indoor and outdoor environments. The control system includes On/Off, DALI, 0/1-10V, and TRIAC options. It comes with white or black front rings and offers optical protection with honeycomb louver, spread, diffusion, and clear lenses. The standard reflector is tube, providing enhanced light distribution.

IT

L'illuminazione architettonica CITIZEN-LED 7W/8,5W/10W fornisce un'illuminazione efficiente e versatile, con una potenza dei LED che varia da 7W a 10W e una potenza del sistema da 318lm a 1034lm. Gli angoli di emissione di 8°, 15°, 24°, 36° e 60° offrono soluzioni di illuminazione flessibili per varie applicazioni. L'apparecchio supporta una gamma CCT da 2700K a 6000K, con 3000K come standard per una luce calda e invitante. Con CRI > 90, garantisce una resa cromatica accurata. Classificato IP20 e IP54, è durevole per ambienti interni ed esterni. Il sistema di controllo include le opzioni On/Off, DALI, 0/1-10V e TRIAC. Viene fornito con anelli frontali bianchi o neri e offre protezione ottica con feritoia a nido d'ape, diffusione, diffusione e lenti trasparenti. Il riflettore standard è a tubo, fornendo una migliore distribuzione della luce.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

LUCCA-1.1	D017	8W - 992lm - 318lm - 8°	D018	8W - 992lm - 671lm - 15°	D019	8W - 992lm - 694lm - 24°	D020	8W - 992lm - 716lm - 36°
	D021	8W - 992lm - 564lm - 60°	D022	12W - 1334lm - 992lm - 15°	D023	12W - 1334lm - 1034lm - 24°	D024	12W - 1334lm - 1068lm - 36°
	D025	12W - 1334lm - 868lm - 60°						
LUCCA-1.2	D026	8W - 992lm - 318lm - 8°	D027	8W - 992lm - 671lm - 15°	D028	8W - 992lm - 694lm - 24°	D029	8W - 992lm - 716lm - 36°
	D030	8W - 992lm - 564lm - 60°	D031	12W - 1334lm - 992lm - 15°	D032	12W - 1334lm - 1034lm - 24°	D033	12W - 1334lm - 1068lm - 36°
	D034	12W - 1334lm - 868lm - 60°						
LUCCA-1.3	D035	12W - 1334lm - 1037lm - 15°	D036	12W - 1334lm - 1159lm - 24°	D037	12W - 1334lm - 1102lm - 36°	D038	12W - 1334lm - 1052lm - 60°
	D039	15W - 1650lm - 1303lm - 15°	D040	15W - 1650lm - 1308lm - 24°	D041	15W - 1650lm - 1247lm - 36°	D042	15W - 1650lm - 1263lm - 60°
LUCCA-1.4	D043	20W - 2327lm - 1702lm - 15°	D044	20W - 2327lm - 1696lm - 24°	D045	20W - 2327lm - 1732lm - 36°	D046	20W - 2327lm - 1740lm - 60°
	D047	25W - 2755lm - 2128lm - 15°	D048	25W - 2755lm - 2120lm - 24°	D049	25W - 2755lm - 2165lm - 36°	D050	25W - 2755lm - 2176lm - 60°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
PA- Pendant	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
K5 - 5000K /90		K6 - 2700-6000K /90	E - BLUETOOTH		F - ZIGBEE		
					G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


12W/15°/3000K/Ra90

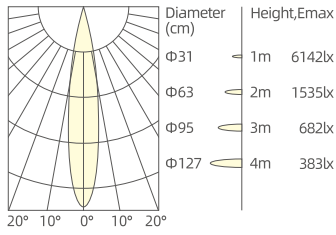


12W/24°/3000K/Ra90

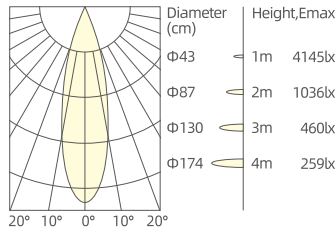


12W/36°/3000K/Ra90

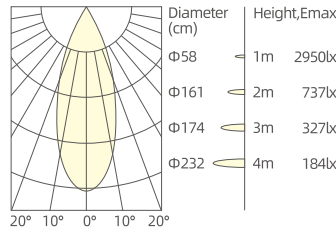


12W/60°/3000K/Ra90

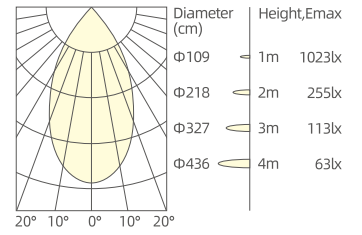


12W/15°/3000K/Ra90

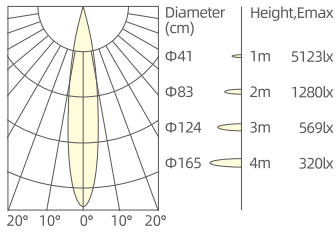


12W/24°/3000K/Ra90

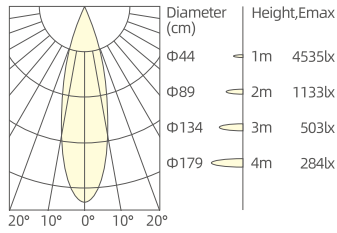


12W/36°/3000K/Ra90

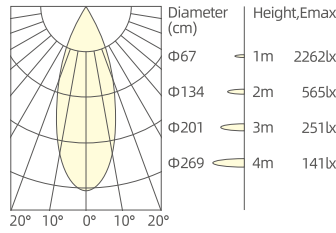


12W/60°/3000K/Ra90

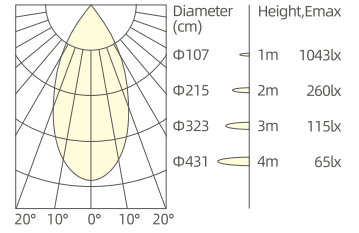


15W/15°/3000K/Ra90

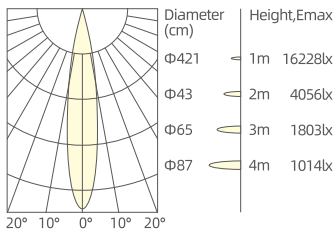


15W/24°/3000K/Ra90




15W/36°/3000K/Ra90

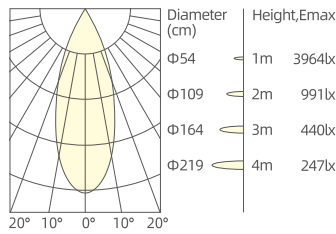


15W/60°/3000K/Ra90

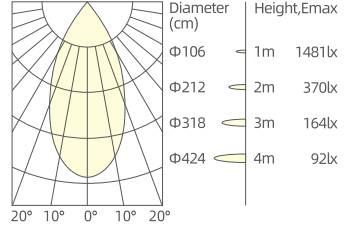


25W/15°/3000K/Ra90




25W/24°/3000K/Ra90



25W/36°/3000K/Ra90

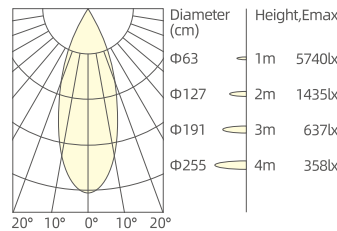

25W/60°/3000K/Ra90

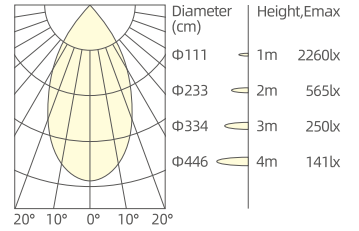

Optical Accessories



Colour(Reflector)

