
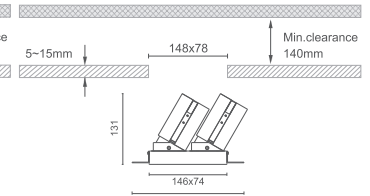




14W - 23W

MILAN R-10.1

25W- 40W



TR - Trim Adjustable

TS - Trimless Adjustable





TR - Trim Adjustable

TS - Trimless Adjustable

14W - 23W

MILAN R-10.2

25W- 40W

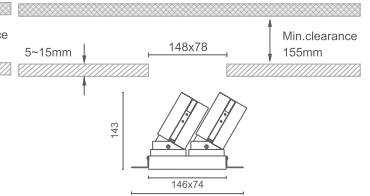

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-X

EN

The Citizen LED 4.5W/6.5W/8W Architectural Lighting is a powerful, efficient solution designed for precision lighting needs. With LED power options from 6.5W to 8W and system power ranging from 7W to 9W, it delivers high-lumen output between 660lm and 815lm, with system output of 467lm to 667lm. Choose from beam angles of 15°, 24°, 36°, or 45° for customized lighting effects. This lighting has a CCT of 3000K with an extended range of 2700K to 6000K. There is a high CRI > 90, ensuring vibrant color accuracy. Available reflector colors include white, black, silver, black chrome, and grey, paired with front rings in white or black. With IP20 and IP54 ratings, optical protection is ensured with options like E01 honeycomb louvers, E02 spread lenses, E03 diffusion lenses, and E04 clear lenses. Control options include On/Off, DALI, 0-10V, and TRIAC for seamless integration.

IT

L'illuminazione architettonica Citizen LED 4,5W/6,5W/8W è una soluzione potente ed efficiente progettata per le esigenze di illuminazione di precisione. Con opzioni di alimentazione LED da 6,5 W a 8 W e potenza del sistema compresa tra 7 W e 9 W, offre un'emissione di lumen elevata compresa tra 660 lm e 815 lm, con un'uscita di sistema da 467 lm a 667 lm. Scegli tra angolo del fascio di 15°, 24°, 36° o 45° per effetti di luce personalizzati. Questa illuminazione ha un CCT di 3000K con una gamma estesa da 2700K a 6000K. C'è un CRI elevato > 90, che garantisce una precisione del colore vibrante. I colori disponibili del riflettore includono bianco, nero, argento, cromo nero e grigio, abbinati ad anelli frontali in bianco o nero. Con i gradi di protezione IP20 e IP54, la protezione ottica è garantita da opzioni come le feritoie a nido d'ape E01, le lenti di diffusione E02, le lenti di diffusione E03 e le lenti trasparenti E04. Le opzioni di controllo includono On/Off, DALI, 0-10V e TRIAC per un'integrazione perfetta.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-10.1	A586	2x7W - 968lm - 704lm - 6°	A587	2x9W - 1902lm - 1338lm - 15°	A588	2x10W - 2134lm - 1614lm - 24°	A589	2x10W - 2134lm - 1814lm - 24°
	A590	2x10W - 2134lm - 1888lm - 36°	A591	2x10W - 2134lm - 1862lm - 45°	A592	2x10W - 2134lm - 1864lm - 55°	A593	2x10.5W - 2174lm - 1448lm - 15°
	A594	2x11W - 1584lm - 1080lm - 10°	A595	2x11.5W - 2640lm - 2064lm - 24°	A596	2x11.5W - 2640lm - 2160lm - 36°	A597	2x11.5W - 2640lm - 2178lm - 45°
	A598	2x11.5W - 2640lm - 2128lm - 55°	A599	2x12W - 1892lm - 1308lm - 10°				
MILAN S-10.1	A600	2x12.5W - 2174lm - 1716lm - 15°	A601	2x14W - 3300lm - 2526lm - 24°	A602	2x14W - 3300lm - 2640lm - 36°	A603	2x14W - 3300lm - 2620lm - 45°
	A604	2x14W - 3300lm - 2624lm - 55°	A605	2x14.5W - 1892lm - 1394lm - 10°	A606	2x20W - 3852lm - 2414lm - 15°	A607	2x20W - 4686lm - 3482lm - 24°
	A608	2x20W - 4686lm - 3700lm - 45°	A609	2x20W - 4686lm - 3738lm - 36°	A610	2x20W - 4686lm - 3642lm - 55°		
MILAN S-10.2	A611	2x7W - 968lm - 704lm - 6°	A612	2x9W - 1902lm - 1338lm - 15°	A613	2x10W - 2134lm - 1614lm - 24°	A614	2x10W - 2134lm - 1814lm - 24°
	A615	2x10W - 2134lm - 1888lm - 36°	A616	2x10W - 2134lm - 1862lm - 45°	A617	2x10W - 2134lm - 1864lm - 55°	A618	2x10.5W - 2174lm - 1448lm - 15°
	A619	2x11W - 1584lm - 1080lm - 10°	A620	2x11.5W - 2640lm - 2064lm - 24°	A621	2x11.5W - 2640lm - 2160lm - 36°	A622	2x11.5W - 2640lm - 2178lm - 45°
	A623	2x11.5W - 2640lm - 2128lm - 55°	A624	2x12W - 1892lm - 1308lm - 10°				
MILAN S-10.2	A625	2x12.5W - 2174lm - 1716lm - 15°	A626	2x14W - 3300lm - 2526lm - 24°	A627	2x14W - 3300lm - 2640lm - 36°	A628	2x14W - 3300lm - 2620lm - 45°
	A629	2x14W - 3300lm - 2624lm - 55°	A630	2x14.5W - 1892lm - 1394lm - 10°	A631	2x20W - 3852lm - 2414lm - 15°	A632	2x20W - 4686lm - 3482lm - 24°
	A633	2x20W - 4686lm - 3700lm - 45°	A634	2x20W - 4686lm - 3738lm - 36°	A635	2x20W - 4686lm - 3642lm - 55°		

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90	G - CASAMBI		BR - BRONZE		WD - WOOD	


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


2x11W/10°/3000K/Ra90




2x9W/15°/3000K/Ra90




2x10W/24°/3000K/Ra90




2x10W/36°/3000K/Ra90

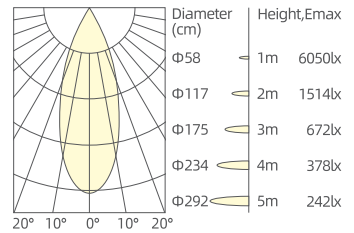


2x10W/45°/3000K/Ra90




2x10W/55°/3000K/Ra90




2x11W/10°/3000K/Ra90




2x9W/15°/3000K/Ra90

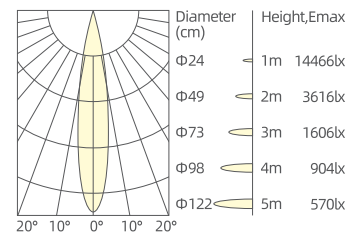


2x14.5W/10°/3000K/Ra90




2x12.5W/15°/3000K/Ra90




2x14W/24°/3000K/Ra90




2x14W/36°/3000K/Ra90

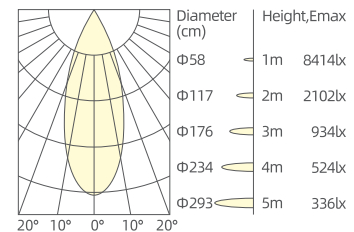


2x14W/45°/3000K/Ra90




2x14W/55°/3000K/Ra90




2x14.5W/10°/3000K/Ra90




2x20W/15°/3000K/Ra90

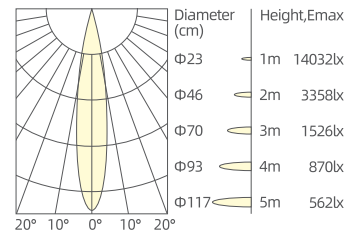


2x20W/24°/3000K/Ra90




2x20W/36°/3000K/Ra90



2x20W/45°/3000K/Ra90



2x20W/55°/3000K/Ra90

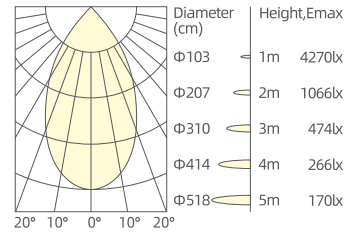

Optical Accessories



Colour(Reflector)

