
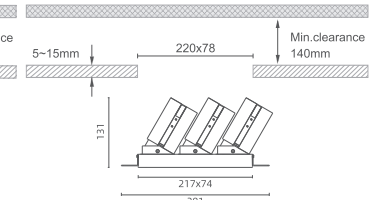




21W - 34.5W

MILAN R-11.1

37.5W - 60W



TR - Trim Adjustable

TS - Trimless Adjustable





TR - Trim Adjustable

TS - Trimless Adjustable

21W - 34.5W

MILAN R-11.2

37.5W - 60W

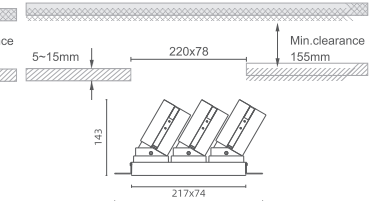

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-XI EN

The Citizen LED 8.5 W/10W Architectural Lighting is a powerful lighting solution, perfect for various architectural applications. Offering LED power from 3x6W to 3x10W and system power between 3x7W to 3x11.5W, it provides LED output from 1452lm to 3960lm and system output from 1056lm to 3267lm. This model supports multiple beam angles from 6° to 55°, and its CCT range of 2700K to 6000K (standard 3000K) with CRI > 90 ensures accurate color rendering. Available IP ratings (IP20/IP54) protect against dust and moisture, with optical protection options like E01 honeycomb, E02 spread, E03 diffusion, and E04 clear lenses. Its drive ranges from 12V 500mA to 34V 300mA. Reflector finishes are available in white, black, silver, black chrome, and grey, with front ring colors in white and black. Control options include On/Off, DALI, 0/1-10V, and TRIAC, providing flexibility for any architectural design.

IT

L'illuminazione architettonica Citizen LED 8,5 W/10W è una potente soluzione di illuminazione, perfetta per varie applicazioni architettoniche. Offrendo una potenza LED da 3x6W a 3x10W e una potenza di sistema compresa tra 3x7W e 3x11.5W, fornisce un'uscita LED da 1452lm a 3960lm e un'uscita di sistema da 1056lm a 3267lm. Questo modello supporta più angoli del fascio da 6° a 55° e la sua gamma CCT da 2700K a 6000K (standard 3000K) con CRI > 90 garantisce una resa cromatica accurata. I gradi di protezione IP disponibili (IP20/IP54) proteggono da polvere e umidità, con opzioni di protezione ottica come E01 a nido d'ape, E02 diffusione, E03 diffusione e E04 lenti trasparenti. Il suo azionamento varia da 12V 500mA a 34V 300mA. Le finiture del riflettore sono disponibili in bianco, nero, argento, cromo nero e grigio, con i colori dell'anello frontale in bianco e nero. Le opzioni di controllo includono On/Off, DALI, 0/1-10V e TRIAC, offrendo flessibilità per qualsiasi progetto architettonico.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-11.1	A636	3x7W - 1452lm - 1056lm - 6°	A637	3x9W - 2853lm - 2007lm - 15°	A638	3x10W - 3201lm - 2721lm - 24°	A639	3x10W - 3201lm - 2832lm - 36°
	A640	3x10W - 3201lm - 2793lm - 45°	A641	3x10W - 3201lm - 2796lm - 55°	A642	3x10.5W - 3261lm - 2172lm - 15°	A643	3x11W - 2376lm - 1620lm - 10°
	A644	3x11.5W - 3960lm - 3096lm - 24°	A645	3x11.5W - 3960lm - 3240lm - 36°	A646	3x11.5W - 3960lm - 3261lm - 45°	A647	3x11.5W - 3960lm - 3192lm - 55°
	A648	3x12W - 2838lm - 1962lm - 10°						
MILAN S-11.1	A651	3x12.5W - 3261lm - 2574lm - 15°	A652	3x14W - 4950lm - 3789lm - 24°	A653	3x14W - 4950lm - 3963lm - 36°	A654	3x14W - 4950lm - 3930lm - 45°
	A655	3x14W - 4950lm - 3936lm - 55°	A656	3x14.5W - 2838lm - 2091lm - 10°	A657	3x20W - 5778lm - 3621lm - 15°	A658	3x20W - 7029lm - 5223lm - 24°
	A659	3x20W - 7029lm - 5607lm - 36°	A660	3x20W - 7029lm - 5550lm - 45°	A661	3x20W - 7029lm - 5463lm - 55°		
MILAN S-11.2	A662	3x7W - 1452lm - 1056lm - 6°	A663	3x9W - 2853lm - 2007lm - 15°	A664	3x10W - 3201lm - 2721lm - 24°	A665	3x10W - 3201lm - 2832lm - 36°
	A666	3x10W - 3201lm - 2793lm - 45°	A667	3x10W - 3201lm - 2796lm - 55°	A668	3x10.5W - 3261lm - 2172lm - 15°	A669	3x11W - 2376lm - 1620lm - 10°
	A670	3x11.5W - 3960lm - 3096lm - 24°	A671	3x11.5W - 3960lm - 3240lm - 36°	A672	3x11.5W - 3960lm - 3261lm - 45°	A673	3x11.5W - 3960lm - 3192lm - 55°
	A674	3x12W - 2838lm - 1962lm - 10°						
MILAN S-11.2	A675	3x12.5W - 3261lm - 2574lm - 15°	A676	3x14W - 4950lm - 3789lm - 24°	A677	3x14W - 4950lm - 3963lm - 36°	A678	3x14W - 4950lm - 3930lm - 45°
	A679	3x14W - 4950lm - 3936lm - 55°	A680	3x14.5W - 2838lm - 2091lm - 10°	A681	3x20W - 5778lm - 3621lm - 15°	A682	3x20W - 7029lm - 5223lm - 24°
	A683	3x20W - 7029lm - 5607lm - 36°	A684	3x20W - 7029lm - 5550lm - 45°	A685	3x20W - 7029lm - 5463lm - 55°		

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


3x11W/10°/3000K/Ra90




3x9W/15°/3000K/Ra90




3x10W/24°/3000K/Ra90




3x10W/36°/3000K/Ra90

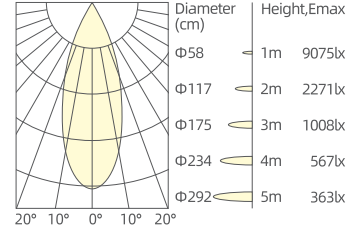


3x10W/45°/3000K/Ra90




3x10W/55°/3000K/Ra90




3x20W/24°/3000K/Ra90




3x14W/36°/3000K/Ra90

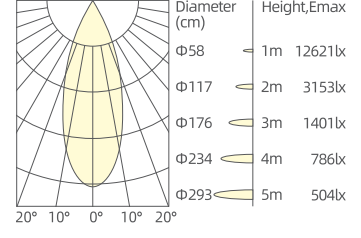


3x14.5W/10°/3000K/Ra90




3x12.5W/15°/3000K/Ra90




3x14W/24°/3000K/Ra90




3x20W/15°/3000K/Ra90

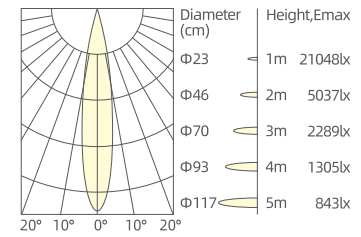


3x14W/45°/3000K/Ra90




3x14W/55°/3000K/Ra90




3x14.5W/10°/3000K/Ra90




3x20W/36°/3000K/Ra90

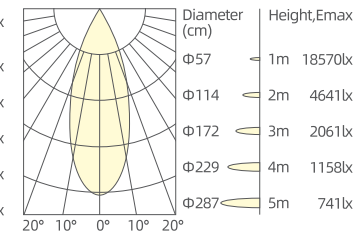

3x20W/45°/3000K/Ra90



3x20W/55°/3000K/Ra90



Optical Accessories



Colour(Reflector)

