
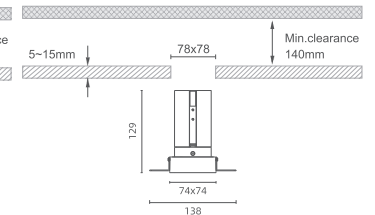




7W- 12W

MILAN R-12.1

12.5W- 20W



TR - Trim Adjustable

TS - Trimless Adjustable





TR - Trim Adjustable

TS - Trimless Adjustable

7W- 12W

MILAN R-12.2

12.5W- 20W

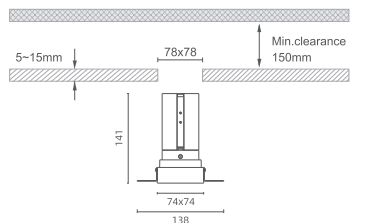

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-XII

EN

The Citizen LED 8.5W/10W Architectural Lighting series offers high-performance, making it ideal for architectural and commercial applications. With LED power options ranging from 6W to 10W and system power from 7W to 11.5W, it delivers output between 484lm and 1320lm. System output ranges from 352lm to 1089. Beam angles are available from 6° to 55°, and color temperature options range from a warm 2700K to a crisp 6000K with a CRI of over 90, ensuring excellent color rendering. Its drive ranges from 12V 500mA to 34V 300mA. The series offers IP20 and IP54 protection, and control systems include On/Off, DALI, 0/1-10V, and TRIAC. Choose from various reflector and ring finishes, including white, black, silver, black chrome, and grey. Optional optical accessories include E01 honeycomb louvers, E02 spread lenses, E03 diffusion lenses, and E04 clear lenses for precise light control.

IT

La serie di illuminazione architettonica Citizen LED 8,5W/10W offre prestazioni elevate, che la rendono ideale per applicazioni architettoniche e commerciali. Con opzioni di alimentazione LED che vanno da 6 W a 10 W e potenza del sistema da 7 W a 11,5 W, offre un'uscita compresa tra 484 lm e 1320 lm. La potenza del sistema varia da 352 lm a 1089. Gli angoli del fascio sono disponibili da 6° a 55° e le opzioni di temperatura del colore vanno da un caldo 2700K a un nitido 6000K con un CRI di oltre 90, garantendo un'eccellente resa cromatica. Il suo azionamento varia da 12 V 500 mA a 34 V 300 mA. La serie offre protezione IP20 e IP54 e i sistemi di controllo includono On/Off, DALI, 0/1-10 V e TRIAC. Scegli tra varie finiture di riflettori e anelli tra cui bianco, nero, argento, cromo nero e grigio. Gli accessori ottici opzionali includono le lamelle a nido d'ape E01, le lenti di diffusione E02, le lenti di diffusione E03 e le lenti trasparenti E04 per un controllo preciso della luce.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-12.1	A686	7W - 484lm - 352lm - 6°	A687	9W - 951lm - 669lm - 15°	A688	10W - 1067lm - 907lm - 24°	A689	10W - 1067lm - 944lm - 36°
	A690	10W - 1067lm - 931lm - 45°	A691	10W - 1067lm - 932lm - 55°	A692	10.5W - 1087lm - 724lm - 15°	A693	11W - 792lm - 540lm - 10°
	A694	11.5W - 1320lm - 1032lm - 24°	A695	11.5W - 1320lm - 1080lm - 36°	A696	11.5W - 1320lm - 1089lm - 45°	A697	11.5W - 1320lm - 1064lm - 55°
	A698	12W - 946lm - 654lm - 10°						
MILAN S-12.1	A699	12.5W - 1087lm - 858lm - 15°	A700	14W - 1650lm - 1263lm - 24°	A701	14W - 1650lm - 1321lm - 36°	A702	14W - 1650lm - 1310lm - 45°
	A703	14W - 1650lm - 1312lm - 55°	A704	14.5W - 946lm - 697lm - 10°	A705	20W - 1926lm - 1207lm - 15°	A706	20W - 2343lm - 1741lm - 24°
	A707	20W - 2343lm - 1869lm - 36°	A708	20W - 2343lm - 1850lm - 45°	A709	20W - 2343lm - 1821lm - 55°		
MILAN S-12.2	A710	7W - 484lm - 352lm - 6°	A710	9W - 951lm - 669lm - 15°	A711	10W - 1067lm - 907lm - 24°	A712	10W - 1067lm - 944lm - 36°
	A712	10W - 1067lm - 931lm - 45°	A713	10W - 1067lm - 932lm - 55°	A714	10.5W - 1087lm - 724lm - 15°	A715	11W - 792lm - 540lm - 10°
	A716	11.5W - 1320lm - 1032lm - 24°	A717	11.5W - 1320lm - 1080lm - 36°	A718	11.5W - 1320lm - 1089lm - 45°	A719	11.5W - 1320lm - 1064lm - 55°
	A720	12W - 946lm - 654lm - 10°						
MILAN S-12.2	A721	12.5W - 1087lm - 858lm - 15°	A722	14W - 1650lm - 1263lm - 24°	A723	14W - 1650lm - 1321lm - 36°	A724	14W - 1650lm - 1310lm - 45°
	A725	14W - 1650lm - 1312lm - 55°	A726	14.5W - 946lm - 697lm - 10°	A727	20W - 1926lm - 1207lm - 15°	A728	20W - 2343lm - 1741lm - 24°
	A729	20W - 2343lm - 1869lm - 36°	A730	20W - 2343lm - 1850lm - 45°	A731	20W - 2343lm - 1821lm - 55°		

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


11W/10°/3000K/Ra90




9W/15°/3000K/Ra90




10W/24°/3000K/Ra90




12.5W/15°/3000K/Ra90

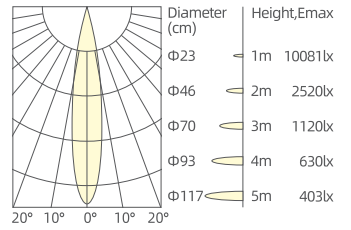


10W/36°/3000K/Ra90




10W/45°/3000K/Ra90




10W/55°/3000K/Ra90




14.5W/10°/3000K/Ra90

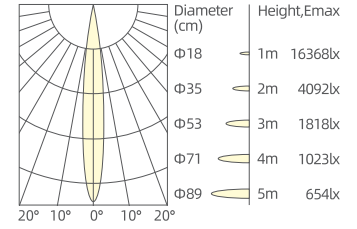


14.5W/10°/3000K/Ra90




14W/24°/3000K/Ra90




14W/36°/3000K/Ra90




14W/45°/3000K/Ra90




14W/55°/3000K/Ra90




20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




20W/36°/3000K/Ra90

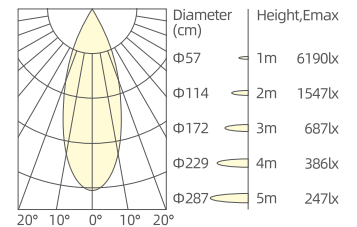

20W/45°/3000K/Ra90



20W/55°/3000K/Ra90



Optical Accessories



Colour(Reflector)

