


## MILAN S-2.1

## MILAN S-2.2

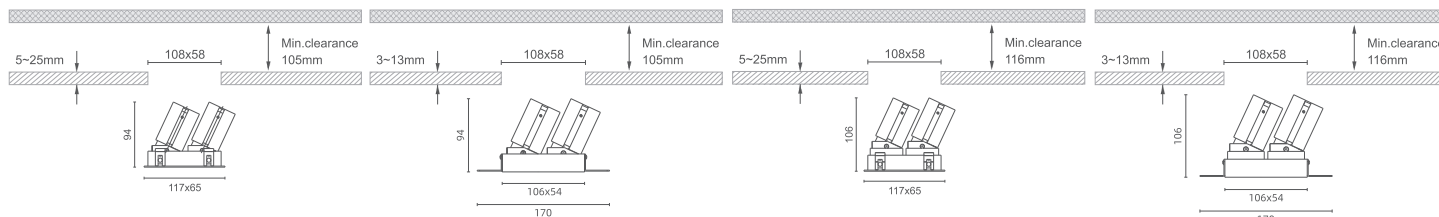

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

## MILAN S-II

### EN

The Citizen LED 4.5W/6.5W/8W Architectural Lighting is designed for professional spaces requiring high performance and flexibility. With dual LED power options from 2x6.5W to 2x8W and system power ranging from 2x7W to 2x9W, it delivers an LED output of 1320lm to 1630lm and a system output of 934lm to 1334lm. Beam angles include 15°, 24°, 36°, and 45° for adaptable lighting configurations, with a standard CCT of 3000K and CRI greater than 90 for accurate color rendering. Controls include On/Off, DALI, 0/1-10V, and TRIAC, with IP20 and IP54 protection options. Reflector colors are available in white, black, silver, black chrome, and grey, with front rings in white and black. Optical accessories include the E01 honeycomb louver for IP20 and E02, E03, and E04 lenses for IP54, with customizable combinations for specific lighting needs.

### IT

L'illuminazione architettonica Citizen LED 4.5W/6.5W/8W è progettata per spazi professionali che richiedono elevate prestazioni e flessibilità. Con opzioni di alimentazione a doppio LED da 2x6,5 W a 2x8 W e una potenza di sistema che va da 2x7 W a 2x9 W, offre un'uscita LED da 1320 lm a 1630 lm e un'uscita di sistema da 934 lm a 1334 lm. Gli angoli del fascio includono 15°, 24°, 36° e 45° per configurazioni di illuminazione adattabili, con un CCT standard di 3000K e un CRI superiore a 90 per una resa cromatica accurata. I controlli includono On/Off, DALI, 0/1-10V e TRIAC, con opzioni di protezione IP20 e IP54. I colori del riflettore sono disponibili in bianco, nero, argento, cromo nero e grigio, con anelli frontali in bianco e nero. Gli accessori ottici includono la feritoia a nido d'ape E01 per IP20 e le lenti E02, E03 ed E04 per IP54, con combinazioni personalizzabili per specifiche esigenze di illuminazione.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-2.1	A426	2x7W - 1320lm - 934lm - 15°	A427	2x7W - 1304lm - 1192lm - 24°	A428	2x7W - 1304lm - 1252lm - 36°	A429	2x7W - 1304lm - 1140lm - 45°
	A430	2x9W - 1584lm - 1200lm - 15°	A431	2x9W - 1630lm - 1356lm - 24°	A432	2x9W - 1630lm - 1434lm - 36°	A433	2x9W - 1630lm - 1334lm - 45°
MILAN S-2.2	A434	2x7W - 1320lm - 934lm - 15°	A435	2x7W - 1304lm - 1192lm - 24°	A436	2x7W - 1304lm - 1252lm - 36°	A437	2x7W - 1304lm - 1140lm - 45°
	A438	2x9W - 1584lm - 1200lm - 15°	A439	2x9W - 1630lm - 1356lm - 24°	A440	2x9W - 1630lm - 1434lm - 36°	A441	2x9W - 1630lm - 1334lm - 45°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


### Code Example

A001 TA W K11 Δ Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


2x7W/15°/3000K/Ra90




2x7W/24°/3000K/Ra90




2x7W/36°/3000K/Ra90




2x7W/45°/3000K/Ra90

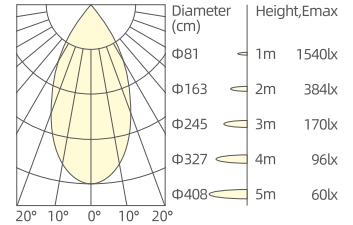


2x9W/15°/3000K/Ra90




2x9W/24°/3000K/Ra90



2x9W/36°/3000K/Ra90



2x9W/45°/3000K/Ra90

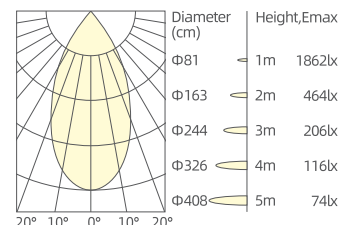

### Optical Accessories

- OR01 Honeycomb Louver
- OR02 Spread Lens
- OR03 Diffusion Lens
- OR04 Clear Lens

### Colour(Reflector)

- White
- Black
- Silver
- Black Chrome
- Grey
- Golden
- Bronze
- Wood