


MILAN S-3.1

MILAN S-3.2

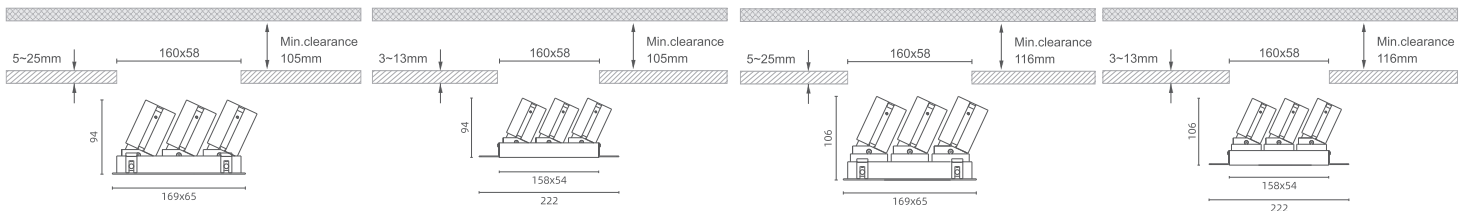

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-III

EN

The Citizen LED 4.5W/6.5W/8W Architectural Lighting fixture is engineered for high-quality illumination with triple LED power options ranging from 3x6.5W to 3x8W, and system power between 3x7W and 3x9W. Delivering an impressive LED output of 1980lm to 2445lm and a system output of 1401lm to 2001lm, it provides versatile beam angles of 15°, 24°, 36°, and 45° to suit different lighting needs. With a standard CCT of 3000K and CRI above 90, it ensures vibrant and accurate color rendering. The fixture supports On/Off, DALI, 0/1-10V, and TRIAC control options, with IP20 and IP54 ratings for protection. Reflectors are available in white, black, silver, black chrome, and grey, with front rings in white and black. For optical protection, the E01 honeycomb louver serves IP20, while E02, E03, and E04 lenses offer IP54, allowing customizable combinations to enhance lighting effects.

IT

L'apparecchio di illuminazione architettonica Citizen LED 4.5W/6.5W/8W è progettato per un'illuminazione di alta qualità con opzioni di potenza a triplo LED che vanno da 3x6.5W a 3x8W e potenza del sistema tra 3x7W e 3x9W. Con un'impressionante potenza LED da 1980 lm a 2445 lm e una potenza di sistema da 1401 lm a 2001 lm, offre angoli di emissione versatili di 15°, 24°, 36° e 45° per soddisfare le diverse esigenze di illuminazione. Con un CCT standard di 3000K e un CRI superiore a 90, garantisce una resa cromatica vibrante e accurata. L'apparecchio supporta le opzioni di controllo On/Off, DALI, 0/1-10V e TRIAC, con grado di protezione IP20 e IP54. I riflettori sono disponibili in bianco, nero, argento, cromo nero e grigio, con anelli frontali in bianco e nero. Per la protezione ottica, la feritoia a nido d'ape E01 è dotata di grado di protezione IP20, mentre le lenti E02, E03 ed E04 offrono un grado di protezione IP54, che consente combinazioni personalizzabili per migliorare gli effetti di luce.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-3.1	A442	3x7W - 1980lm - 1401lm - 15°	A443	3x7W - 1956lm - 1788lm - 24°	A444	3x7W - 1956lm - 1878lm - 36°	A445	3x7W - 1956lm - 1710lm - 45°
	A446	3x9W - 2376lm - 1800lm - 15°	A447	3x9W - 2445lm - 2034lm - 24°	A448	3x9W - 2445lm - 2151lm - 36°	A449	3x9W - 2445lm - 2001lm - 45°
MILAN S-3.2	A450	3x7W - 1980lm - 1401lm - 15°	A451	3x7W - 1956lm - 1788lm - 24°	A452	3x7W - 1956lm - 1878lm - 36°	A453	3x7W - 1956lm - 1710lm - 45°
	A454	3x9W - 2376lm - 1800lm - 15°	A455	3x9W - 2445lm - 2034lm - 24°	A456	3x9W - 2445lm - 2151lm - 36°	A457	3x9W - 2445lm - 2001lm - 45°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


3x7W/15°/3000K/Ra90

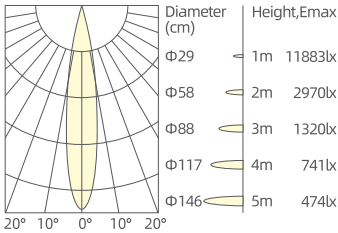


3x7W/24°/3000K/Ra90

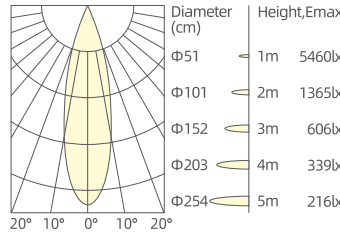


3x7W/36°/3000K/Ra90

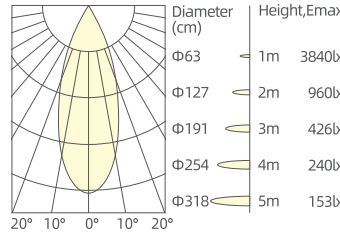


3x7W/45°/3000K/Ra90

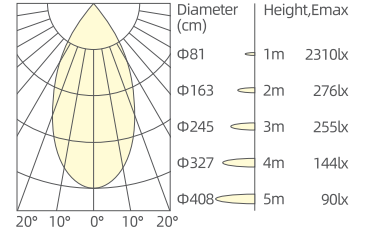


3x9W/15°/3000K/Ra90

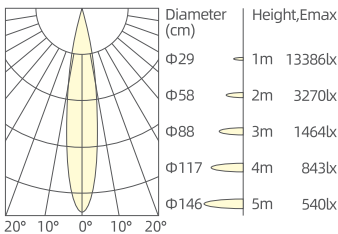


3x9W/24°/3000K/Ra90

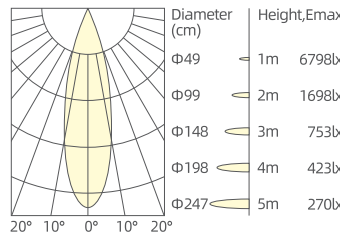

3x9W/36°/3000K/Ra90

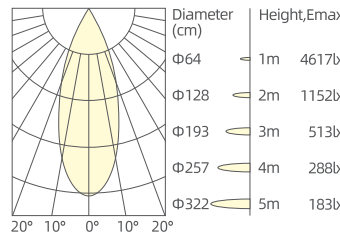

3x9W/45°/3000K/Ra90

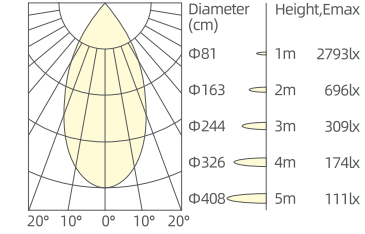

Optical Accessories

OR01



Honeycomb Louver

OR02



Spread Lens

OR03



Diffusion Lens

OR04



Clear Lens

Colour(Reflector)



White



Black



Silver



Black Chrome



Grey



Golden



Bronze



Wood