



MILAN S-4.1

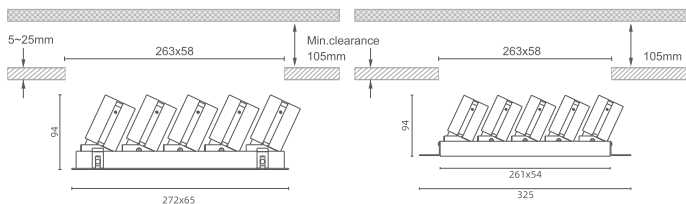

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-4.1

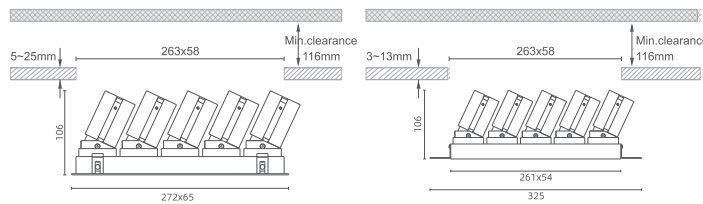

TR - Trim Adjustable

TS - Trimless Adjustable

MILAN S-IV

EN

The CITIZEN LED 4.5W/6.5W/8W Architectural Lighting provides efficient, high-quality illumination for various architectural applications. With LED power ranging from 5x6.5W to 5x8W and system power from 5x7W to 5x9W, it delivers LED outputs from 3300lm to 4075lm and system outputs from 2335lm to 3585lm. Available beam angles of 15°, 24°, 36°, and 45° offer flexibility for different lighting needs. The 3000K CCT and CRI greater than 90 ensure accurate and vibrant color rendering. It supports CCT options from 2700K to 6000K and is compatible with On/Off, DALI, 0/1-10V, and TRIAC control systems. Standard front rings are available in white and black, with reflectors in white, black, silver, and black chrome. IP20 protection features E01 honeycomb louvers, while IP54 includes E02, E03, and E04 lenses for enhanced durability.

IT

L'illuminazione architettonica CITIZEN LED 4,5W/6,5W/8W fornisce un'illuminazione efficiente e di alta qualità per varie applicazioni architettoniche. Con una potenza dei LED che va da 5x6,5W a 5x8W e una potenza del sistema da 5x7W a 5x9W, fornisce uscite LED da 3300lm a 4075lm e uscite di sistema da 2335lm a 3585lm. Gli angoli di emissione disponibili di 15°, 24°, 36° e 45° offrono flessibilità per le diverse esigenze di illuminazione. Il CCT 3000K e il CRI superiore a 90 garantiscono una resa cromatica accurata e vibrante. Supporta le opzioni CCT da 2700K a 6000K ed è compatibile con i sistemi di controllo On/Off, DALI, 0/1-10V e TRIAC. Gli anelli anteriori standard sono disponibili in bianco e nero, con riflettori in bianco, nero, argento e cromo nero. La protezione IP20 è dotata di feritoie a nido d'ape E01, mentre IP54 include lenti E02, E03 ed E04 per una

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-4.1	A458	5WX7W - 3300lm - 2335lm - 15°	A459	5WX7W - 3260lm - 2980lm - 24°	A460	5WX7W - 3260lm - 3130lm - 36°	A461	5WX7W - 3260lm - 2850lm - 45°
	A462	5WX9W - 3960lm - 3000lm - 15°	A463	5WX9W - 4075lm - 3390lm - 24°	A464	5WX9W - 4075lm - 3585lm - 36°	A465	5WX9W - 4075lm - 3335lm - 45°
MILAN S-4.2	A466	5WX7W - 3300lm - 2335lm - 15°	A467	5WX7W - 3260lm - 2980lm - 24°	A468	5WX7W - 3260lm - 3130lm - 36°	A469	5WX7W - 3260lm - 2850lm - 45°
	A470	5WX9W - 3960lm - 3000lm - 15°	A471	5WX9W - 4075lm - 3390lm - 24°	A472	5WX9W - 4075lm - 3585lm - 36°	A473	5WX9W - 4075lm - 3335lm - 45°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90	G - CASAMBI		BR - BRONZE	WD - WOOD		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


5x7W/15°/3000K/Ra90

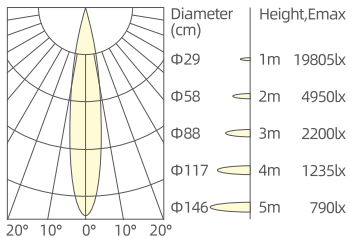


5x7W/24°/3000K/Ra90

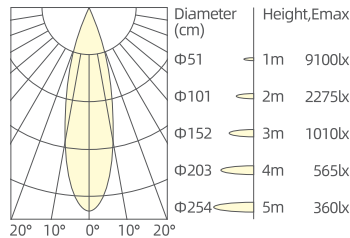


5x7W/36°/3000K/Ra90

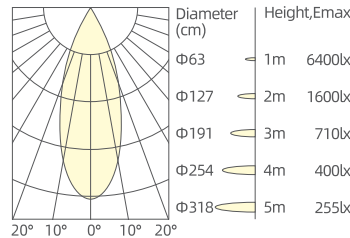


5x7W/45°/3000K/Ra90

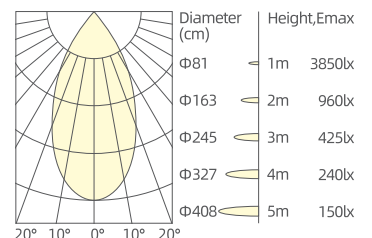


5x9W/15°/3000K/Ra90

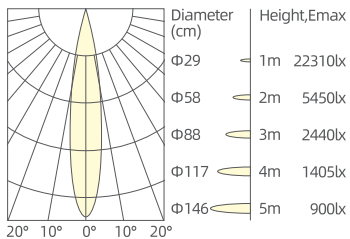


5x9W/24°/3000K/Ra90

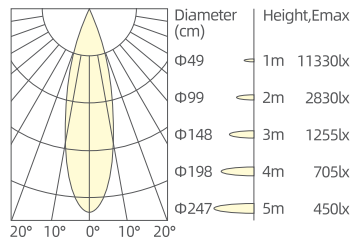

5x9W/36°/3000K/Ra90

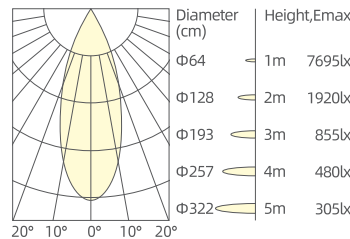

5x9W/45°/3000K/Ra90

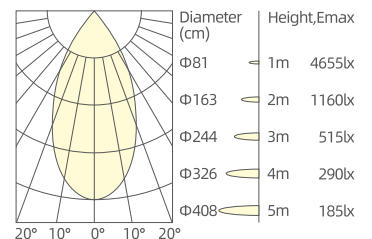

Optical Accessories

- OR01**

 Honeycomb Louver
- OR02**

 Spread Lens
- OR03**

 Diffusion Lens
- OR04**

 Clear Lens

Colour(Reflector)

- White
- Black
- Silver
- Black Chrome
- Grey
- Golden
- Bronze
- Wood