





MILAN S-5.1

MILAN S-5.2



TR - Trim Fixed

TS - Trimless Fixed

TR - Trim Fixed

TS - Trimless Fixed

MILAN S-V

EN

The Citizen LED 4.5W/6.5W/8W Architectural Lighting series offers versatile options in 4.5W, 6.5W, and 8W outputs, providing efficient and adjustable lighting solutions for architectural needs. With LED power from 6.5W to 8W and system power of 7W to 9W, the fixtures deliver LED outputs from 660 to 815 lumens, with system output ranging between 467 to 667 lumens. Beam angles are available at 15°, 24°, 36°, and 45° for customized lighting spread. This lighting solution offers a high color rendering index (CRI > 90) and comes in a range of color temperatures from 2700K to 6000K. Reflectors come in white, black, silver, black chrome, and grey, while front rings are available in white and black. With IP20 and IP54 ratings, users can select from multiple optical protections, including honeycomb louvers and various lens options, to match their lighting needs.

IT

La serie di illuminazione architettonica Citizen LED da 4,5 W/6,5 W/8 W offre opzioni versatili con uscite da 4,5 W, 6,5 W e 8 W, fornendo soluzioni di illuminazione efficienti e regolabili per le esigenze architettoniche. Con una potenza LED da 6,5 W a 8 W e una potenza del sistema da 7 W a 9 W, gli apparecchi forniscono uscite LED da 660 a 815 lumen, con un'uscita del sistema compresa tra 467 e 667 lumen. Gli angoli del fascio sono disponibili a 15°, 24°, 36° e 45° per una diffusione dell'illuminazione personalizzata. Questa soluzione di illuminazione offre un elevato indice di resa cromatica (CRI > 90) ed è disponibile in una gamma di temperature di colore da 2700K a 6000K. I riflettori sono disponibili in bianco, nero, argento, cromo nero e grigio, mentre gli anelli anteriori sono disponibili in bianco e nero. Con i gradi di protezione IP20 e IP54, gli utenti possono scegliere tra più protezioni ottiche, tra cui feritoie a nido d'ape e varie opzioni di lenti, per soddisfare le loro esigenze di illuminazione.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

MILAN S-5.1	A474	7W - 660lm - 467lm - 15°	A475	7W - 652lm - 596lm - 24°	A476	7W - 652lm - 626lm - 36°	A477	7W - 652lm - 570lm - 45°
	A478	9W - 792lm - 600lm - 15°	A479	9W - 815lm - 678lm - 24°	A480	9W - 815lm - 717lm - 36°	A481	9W - 815lm - 667lm - 45°
MILAN S-5.2	A482	7W - 660lm - 467lm - 15°	A483	7W - 652lm - 596lm - 24°	A484	7W - 652lm - 626lm - 36°	A485	7W - 652lm - 570lm - 45°
	A486	9W - 792lm - 600lm - 15°	A487	9W - 815lm - 678lm - 24°	A488	9W - 815lm - 717lm - 36°	A489	9W - 815lm - 667lm - 45°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE		G - GREY	GO - GOLDEN
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI			BR - BRONZE	WD - WOOD


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/15°/3000K/Ra90

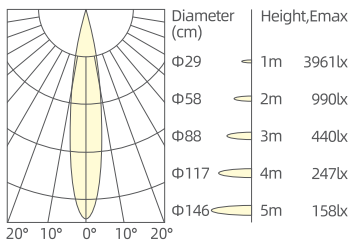


7W/24°/3000K/Ra90

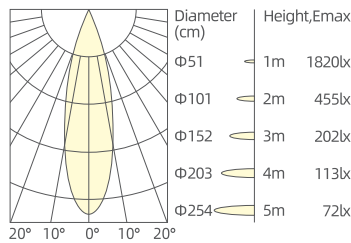


7W/36°/3000K/Ra90

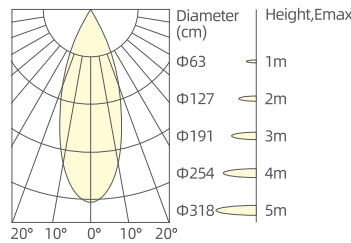


7W/45°/3000K/Ra90

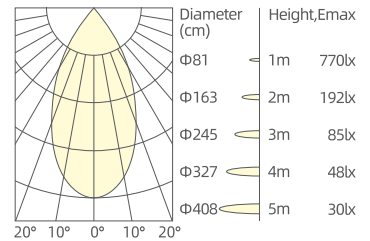


9W/15°/3000K/Ra90

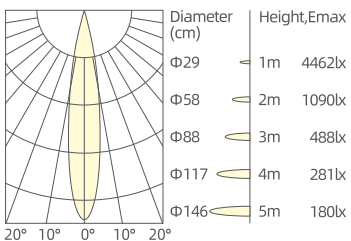


9W/24°/3000K/Ra90

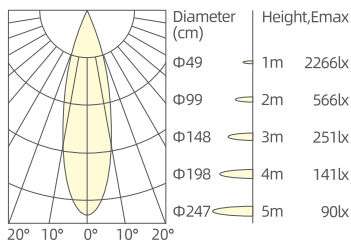

9W/36°/3000K/Ra90

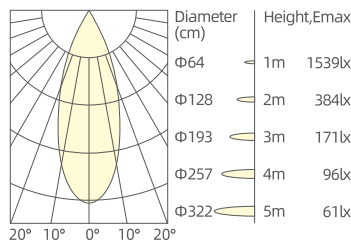

9W/45°/3000K/Ra90

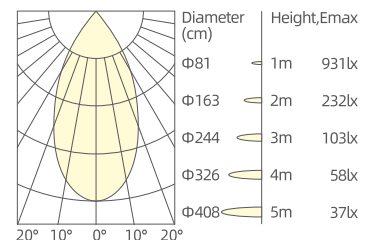

Optical Accessories

OR01



Honeycomb Louver

OR02



Spread Lens

OR03



Diffusion Lens

OR04



Clear Lens

Colour(Reflector)



White



Black



Silver



Black Chrome



Grey



Golden



Bronze



Wood