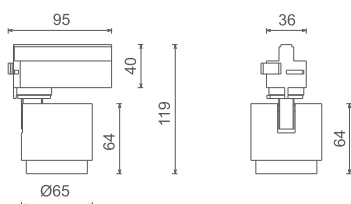




**TERAMO-4.1**

**TERAMO-4.2**


## TERAMO-IV

### EN

The CITIZEN LED 7W/8.5W/10W Architectural Lighting provides efficient, versatile illumination with LED power ranging from 7W to 10W and system power from 8W to 12W. It delivers LED output between 992lm and 1334lm and system output from 671lm to 1068lm, with beam angles of 15°, 24°, 36°, and 60°. The fixture operates at a drive of 34V, 200mA to 300mA. Standard CCT ranges from 2700K to 6000K, with a normal setting of 3000K. The lighting is rated IP20 and IP54 for protection, with a CRI > 90. Control options include On/Off, DALI, 0/1-10V, and TRIAC, with front rings available in white and black

### IT

L'illuminazione architettonica CITIZEN LED 7W/8,5W/10W fornisce un'illuminazione efficiente e versatile con potenze LED che vanno da 7W a 10W e potenze di sistema da 8W a 12W. Fornisce un'uscita LED compresa tra 992 lm e 1334 lm e un'uscita di sistema da 671 lm a 1068 lm, con angoli del fascio di 15°, 24°, 36° e 60°. L'apparecchio funziona a un azionamento di

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

<b>TERAMO-4.1</b>	<b>C681</b>	8W - 992lm - 671lm - 15°	<b>C682</b>	8W - 992lm - 694lm - 24°	<b>C683</b>	8W - 992lm - 716lm - 36°	<b>C684</b>	8W - 992lm - 564lm - 60°
	<b>C685</b>	12W - 1334lm - 992lm - 15°	<b>C686</b>	12W - 1334lm - 1034lm - 24°	<b>C687</b>	12W - 1334lm - 1068lm - 36°	<b>C688</b>	12W - 1334lm - 868lm - 60°
<b>TERAMO-4.2</b>	<b>C689</b>	25W - 2569lm - 1838lm - 12°	<b>C690</b>	25W - 2569lm - 1908lm - 24°	<b>C691</b>	25W - 2569lm - 1718lm - 36°	<b>C692</b>	25W - 2569lm - 1800lm - 20x40°
	<b>C693</b>	25W - 2569lm - 1826lm - 40x60°	<b>C694</b>	30W - 2940lm - 2220lm - 12°	<b>C695</b>	30W - 2940lm - 2096lm - 24°	<b>C696</b>	30W - 2940lm - 2160lm - 36°
	<b>C697</b>	30W - 2940lm - 2192lm - 20x40°	<b>C698</b>	30W - 2940lm - 2263lm - 40x60°				

Finish	CCT/CRI		IP	Dim		Emergency
W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
	K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE	
				G - CASAMBI		


### Code Example

A001 TA W K11 A Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


12W/15°/3000K/Ra90

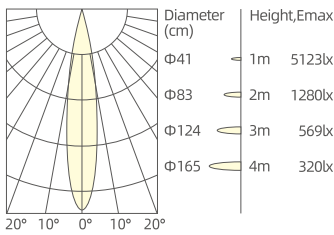


12W/24°/3000K/Ra90

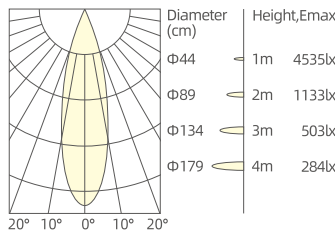


12W/36°/3000K/Ra90




12W/60°/3000K/Ra90

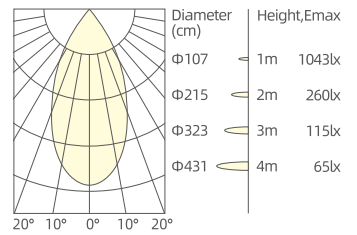


30W/12°/3000K/Ra90



30W/24°/3000K/Ra90



30W/36°/3000K/Ra90



### Optical Accessories

