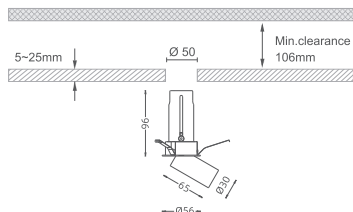
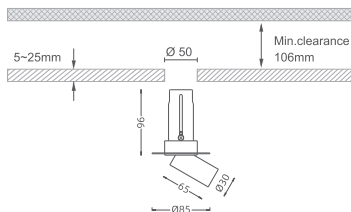

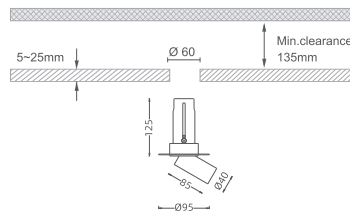
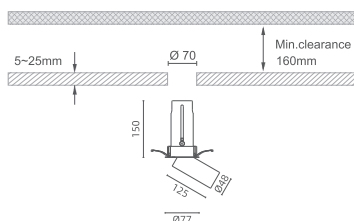
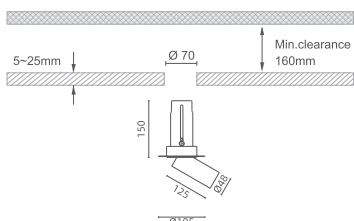
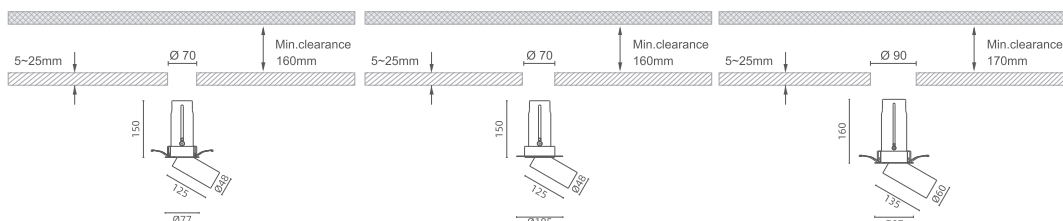
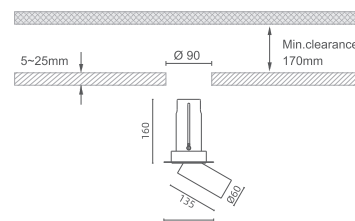


**TONDO R-1.1**

**TR - Trim Adjustable**

**TS - Trimless Adjustable**
**TONDO R-1.2**

**TR - Trim Adjustable**

**TS - Trimless Adjustable**
**TONDO R-1.3**

**TR - Trim Adjustable**

**TS - Trimless Adjustable**
**TONDO R-1.4**

**TR - Trim Adjustable**

**TS - Trimless Adjustable**
**TONDO R-I**
**EN**

The LED 5.5W/7W (CITIZEN LED) Architectural Lighting fixture provides versatile and efficient lighting solutions. With LED power ranging from 5.5W to 7W and system power from 7W to 9W, it achieves an LED output of 604lm to 796lm and a system output of 304lm to 543lm. Beam options include 15°, 24°, and 36°, with a 3000K CCT and CRI greater than 90 for excellent color rendering. The drive operates from 36V 150mA to 34V 200mA. Standard reflectors are black, and front rings are available in both white and black. With IP ratings of 20 and 54 and a CCT range of 2700K to 6000K, it offers flexible control through on/off, DALI, 0/1-10V, and TRIAC. Optical accessories add adaptability, achieving IP54 protection with multiple lens options

**IT**

L'apparecchio di illuminazione architettonica LED 5,5W/7W (CITIZEN LED) offre soluzioni di illuminazione versatili ed efficienti. Con una potenza dei LED compresa tra 5,5 W e 7 W e una potenza del sistema compresa tra 7 W e 9 W, raggiunge un'uscita LED da 604 lm a 796 lm e un'uscita di sistema da 304 lm a 543 lm. Le opzioni del fascio includono 15°, 24° e 36°, con un CCT di 3000K e un CRI superiore a 90 per un'eccellente resa cromatica. L'azionamento funziona da 36 V 150 mA a 34 V 200 mA. I riflettori standard sono neri e gli anelli anteriori sono disponibili sia in bianco che in nero. Con un grado di protezione IP di 20 e 54 e una gamma CCT da 2700K a 6000K, offre un controllo flessibile tramite on/off, DALI, 0/1-10V e TRIAC. Gli accessori ottici aggiungono adattabilità, ottenendo la protezione IP54 con più opzioni di obiettivo

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

<b>TONDO R-1.1</b>	<b>A241</b>	7W - 604lm - 304lm - 15°	<b>A242</b>	7W - 604lm - 370lm - 24°	<b>A243</b>	7W - 604lm - 407lm - 36°	<b>A244</b>	9W - 796lm - 406lm - 15°
	<b>A245</b>	9W - 796lm - 494lm - 24°	<b>A246</b>	9W - 796lm - 543lm - 36°				
<b>TONDO R-1.2</b>	<b>A247</b>	9W - 815lm - 463lm - 15°	<b>A248</b>	9W - 815lm - 524lm - 24°	<b>A249</b>	9W - 815lm - 570lm - 36°	<b>A250</b>	9W - 815lm - 469lm - 50°
	<b>A251</b>	10.5W - 951lm - 509lm - 15°	<b>A252</b>	10.5W - 951lm - 576lm - 24°	<b>A253</b>	10.5W - 951lm - 627lm - 36°	<b>A254</b>	10.5W - 951lm - 515lm - 50°
<b>TONDO R-1.3</b>	<b>A255</b>	10W - 1067lm - 570lm - 15°	<b>A256</b>	10W - 1067lm - 637lm - 24°	<b>A257</b>	10W - 1067lm - 599lm - 36°	<b>A258</b>	10W - 1067lm - 539lm - 55°
	<b>A259</b>	14W - 1650lm - 877lm - 15°	<b>A260</b>	14W - 1650lm - 980lm - 24°	<b>A261</b>	14W - 1650lm - 922lm - 36°	<b>A262</b>	14W - 1650lm - 830lm - 55°
<b>TONDO R-1.4</b>	<b>A263</b>	20W - 2343lm - 1569lm - 15°	<b>A264</b>	20W - 2343lm - 1639lm - 24°	<b>A265</b>	20W - 2343lm - 1681lm - 36°	<b>A266</b>	20W - 2343lm - 1592lm - 50°
	<b>A267</b>	25W - 2569lm - 1857lm - 15°	<b>A268</b>	25W - 2569lm - 1956lm - 24°	<b>A269</b>	25W - 2569lm - 2016lm - 36°	<b>A270</b>	25W - 2569lm - 1945lm - 50°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90	G - CASAMBI			


### Code Example

A001 TA W K11 A Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/15°/3000K/Ra90

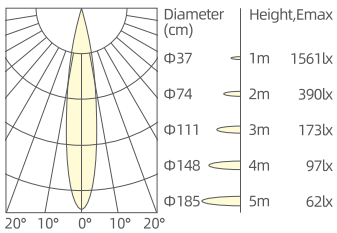


7W/24°/3000K/Ra90

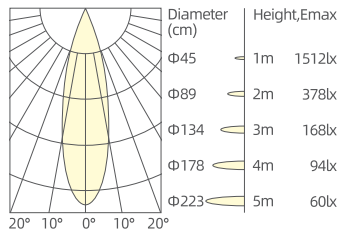


7W/36°/3000K/Ra90




9W/15°/3000K/Ra90

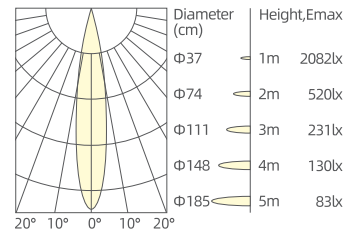


9W/15°/3000K/Ra90




9W/24°/3000K/Ra90




9W/24°/3000K/Ra90




9W/36°/3000K/Ra90

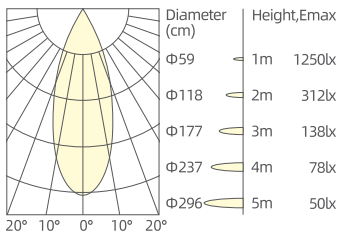


**10.5W/15°/3000K/Ra90**




**10.5W/24°/3000K/Ra90**




**10.5W/36°/3000K/Ra90**




**10.5W/50°/3000K/Ra90**

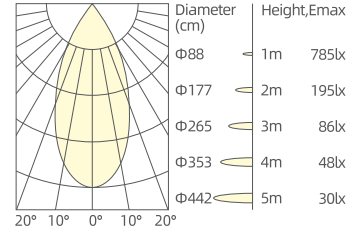


**10W/15°/3000K/Ra90**

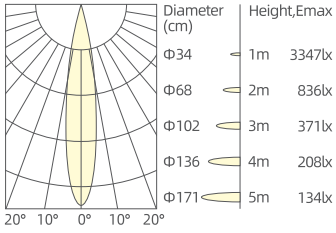


**10W/24°/3000K/Ra90**




**10W/36°/3000K/Ra90**




**10W/55°/3000K/Ra90**

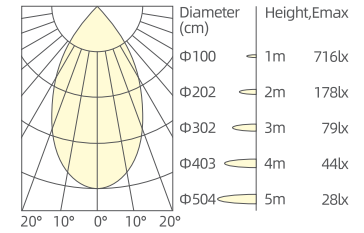


**14W/15°/3000K/Ra90**




**14W/24°/3000K/Ra90**




**14W/36°/3000K/Ra90**




**14W/55°/3000K/Ra90**

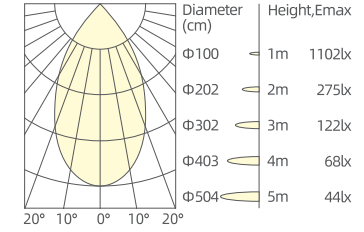


**20W/15°/3000K/Ra90**

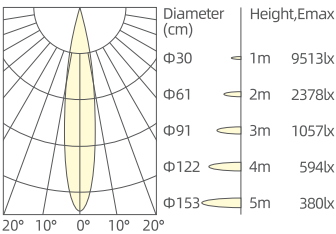


**20W/24°/3000K/Ra90**

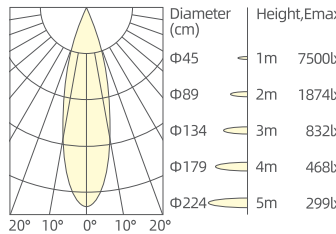


**20W/36°/3000K/Ra90**




**20W/50°/3000K/Ra90**

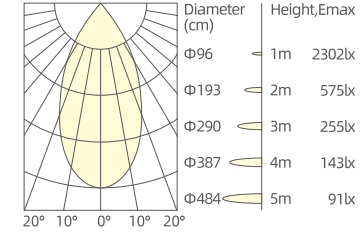


**25W/15°/3000K/Ra90**

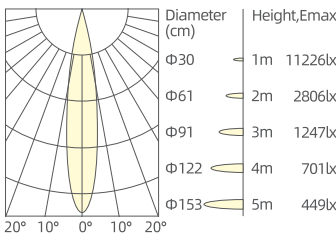


**25W/24°/3000K/Ra90**

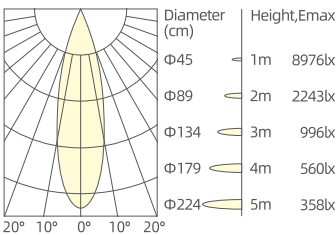

**25W/36°/3000K/Ra90**

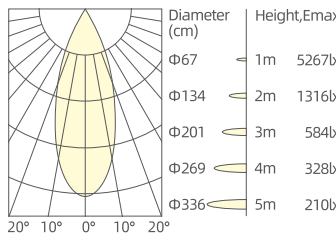

**25W/50°/3000K/Ra90**

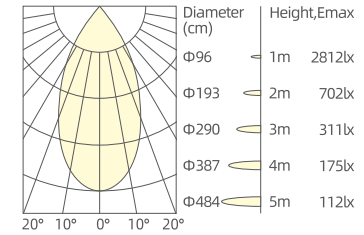

Optical Accessories

