

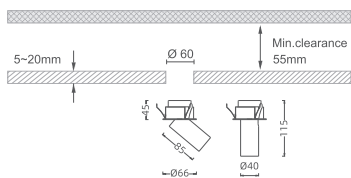


TONDO R-3.1

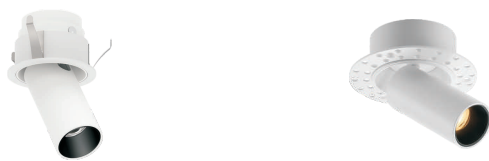


TR - Trim Adjustable




TS - Trimless Adjustable

TONDO R-3.2




TR - Trim Adjustable




TS - Trimless Adjustable

TONDO R-3.3

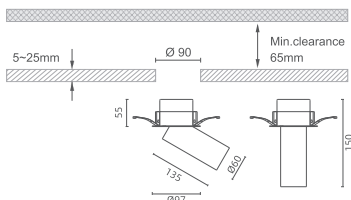

TR - Trim Adjustable



TS - Trimless Adjustable

TONDO R-III

EN

The LED 6.5W/8W/9.5W (CITIZEN LED) Architectural Lighting fixture offers adaptable illumination for architectural settings. It operates at LED power from 8W to 9.5W and system power from 9W to 10.5W, delivering LED output of 815lm to 951lm and system output of 463lm to 515lm. The beam angles include 15°, 24°, 36°, and 50°, ideal for various lighting requirements. With a 3000K CCT and CRI > 90, it ensures high color accuracy. The drive range spans 32V 250mA to 34V 300mA. Available IP ratings of 20 and 54 make it suitable for diverse conditions, with CCT options from 2700K to 6000K. Control options include on/off, DALI, 0/1-10V, and TRIAC. Optical accessories, such as the E01 honeycomb louver (IP20) and E02, E03, and E04 lenses (IP54), enhance protection and lighting versatility. Front rings are offered in white and black.

IT

L'apparecchio di illuminazione architettonica a LED 6,5 W/8 W/9,5 W (CITIZEN LED) offre un'illuminazione adattabile per gli ambienti architettonici. Funziona con una potenza LED da 8 W a 9,5 W e una potenza di sistema da 9 W a 10,5 W, fornendo un'uscita LED da 815 lm a 951 lm e un'uscita di sistema da 463 lm a 515 lm. Gli angoli del fascio includono 15°, 24°, 36° e 50°, ideali per varie esigenze di illuminazione. Con un CCT 3000K e un CRI > 90, garantisce un'elevata precisione del colore. La gamma di azionamento va da 32 V 250 mA a 34 V 300 mA. I gradi di protezione IP disponibili di 20 e 54 lo rendono adatto a diverse condizioni, con opzioni CCT da 2700K a 6000K. Le opzioni di controllo includono on/off, DALI, 0/1-10V e TRIAC. Gli accessori ottici, come la feritoia a nido d'ape E01 (IP20) e le lenti E02, E03 ed E04 (IP54), migliorano la protezione e la versatilità dell'illuminazione. Gli anelli anteriori sono disponibili in bianco e nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO R-3.1	A277	9W - 815lm - 463lm - 15°	A278	9W - 815lm - 524lm - 24°	A279	9W - 815lm - 570lm - 36°	A280	9W - 815lm - 469lm - 50°
	A281	10.5W - 951lm - 509lm - 15°	A282	10.5W - 951lm - 576lm - 24°	A283	10.5W - 951lm - 627lm - 36°	A284	10.5W - 951lm - 515lm - 50°
TONDO R-3.2	A285	10W - 1067lm - 570lm - 15°	A286	10W - 1067lm - 637lm - 24°	A287	10W - 1067lm - 599lm - 36°	A288	10W - 1067lm - 539lm - 55°
	A289	14W - 1650lm - 877lm - 15°	A290	14W - 1650lm - 980lm - 24°	A291	14W - 1650lm - 922lm - 36°	A292	14W - 1650lm - 830lm - 55°
TONDO R-3.3	A293	20W - 2343lm - 1569lm - 15°	A294	20W - 2343lm - 1639lm - 24°	A295	20W - 2343lm - 1681lm - 36°	A296	20W - 2343lm - 1592lm - 50°
	A297	25W - 2569lm - 1857lm - 15°	A298	25W - 2569lm - 1956lm - 24°	A299	25W - 2569lm - 2016lm - 36°	A300	25W - 2569lm - 1945lm - 50°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


9W/15°/3000K/Ra90




9W/24°/3000K/Ra90




9W/36°/3000K/Ra90




9W/50°/3000K/Ra90

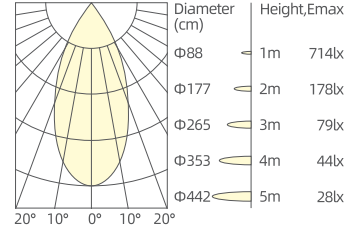


10.5W/15°/3000K/Ra90




10.5W/24°/3000K/Ra90




10.5W/36°/3000K/Ra90




10.5W/50°/3000K/Ra90

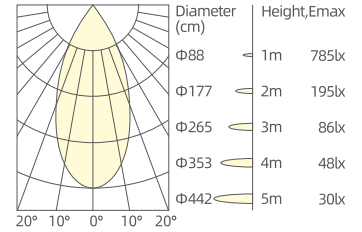


10W/15°/3000K/Ra90




10W/24°/3000K/Ra90




10W/36°/3000K/Ra90




10W/55°/3000K/Ra90

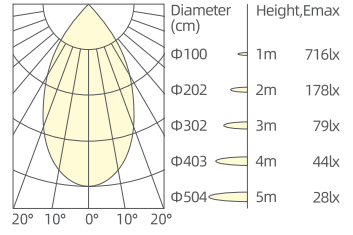


14W/15°/3000K/Ra90




14W/24°/3000K/Ra90




14W/36°/3000K/Ra90




14W/55°/3000K/Ra90

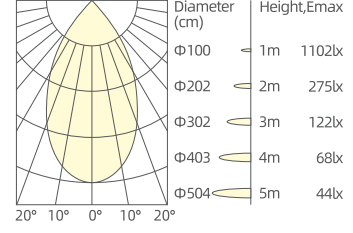


20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




20W/36°/3000K/Ra90




20W/50°/3000K/Ra90

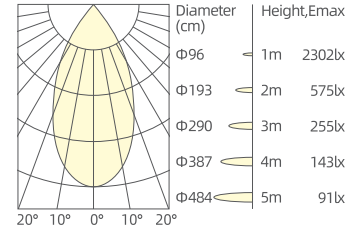


25W/15°/3000K/Ra90




25W/24°/3000K/Ra90



25W/36°/3000K/Ra90



25W/50°/3000K/Ra90

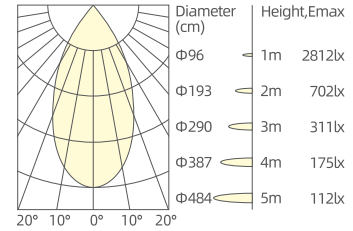

Optical Accessories

