



TONDO R-4.1




TR - Trim Adjustable




TS - Trimless Adjustable

TONDO R-4.2




TR - Trim Adjustable

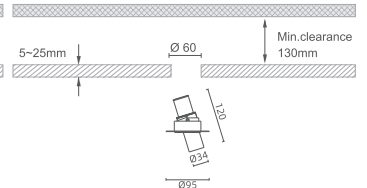


TS - Trimless Adjustable

TONDO R-4.3




TR - Trim Adjustable




TS - Trimless Adjustable

TONDO R-4.4



TR - Trim Adjustable

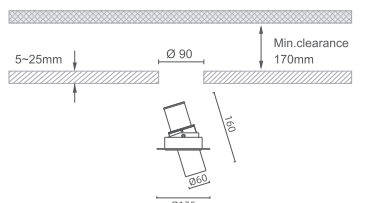

TS - Trimless Adjustable

TONDO R-IV

EN

The CITIZEN-LED 5.5W/7W Architectural Lighting series combines efficiency with versatility, offering LED power options from 5.5W to 7W and system power ranging from 7W to 9W. This fixture provides an LED output of 604lm to 796lm and a system output from 304lm to 543lm, making it ideal for various applications. Available beam angles of 15°, 24°, and 36° ensure flexible lighting coverage. With a color temperature (CCT) of 3000K and a CRI greater than 90, it delivers excellent color rendering. The drive options range from 36V 150mA to 36V 200mA. The standard control system includes on/off, DALI, 0/1-10V, and TRIAC. Rated IP20 and IP54, it features optical accessories such as the E01 honeycomb louver and E02-E04 lenses. The front rings are available in stylish white and black finishes, with CCT options from 2700K to 6000K.

IT

La serie di illuminazione architettonica CITIZEN-LED 5,5 W/7 W combina efficienza e versatilità, offrendo opzioni di potenza LED da 5,5 W a 7 W e potenza di sistema da 7 W a 9 W. Questo apparecchio fornisce un'uscita LED da 604 lm a 796 lm e un'uscita di sistema da 304 lm a 543 lm, il che lo rende ideale per varie applicazioni. Gli angoli di emissione disponibili di 15°, 24° e 36° garantiscono una copertura luminosa flessibile. Con una temperatura di colore (CCT) di 3000K e un CRI superiore a 90, offre un'eccellente resa cromatica. Le opzioni di azionamento vanno da 36 V 150 mA a 36 V 200 mA. Il sistema di controllo standard include on/off, DALI, 0/1-10V e TRIAC. Classificato IP20 e IP54, è dotato di accessori ottici come la feritoia a nido d'ape E01 e le lenti E02-E04. Gli anelli anteriori sono disponibili nelle eleganti finiture bianco e nero, con opzioni CCT da 2700K a 6000K.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO R-4.1	A301	7W - 604lm - 304lm - 15°	A302	7W - 604lm - 370lm - 24°	A303	7W - 604lm - 407lm - 36°	A304	9W - 796lm - 406lm - 15°
	A305	9W - 796lm - 496lm - 24°	A306	9W - 796lm - 593lm - 36°				
TONDO R-4.2	A307	9W - 815lm - 463lm - 15°	A308	9W - 815lm - 524lm - 24°	A309	9W - 815lm - 570lm - 36°	A310	9W - 815lm - 469lm - 50°
	A311	10.5W - 951lm - 509lm - 15°	A312	10.5W - 951lm - 576lm - 24°	A313	10.5W - 951lm - 627lm - 36°	A314	10.5W - 951lm - 515lm - 50°
TONDO R-4.3	A315	10W - 1067lm - 570lm - 15°	A316	10W - 1067lm - 637lm - 24°	A317	10W - 1067lm - 599lm - 36°	A318	10W - 1067lm - 539lm - 55°
	A319	14W - 1650lm - 877lm - 15°	A320	14W - 1650lm - 980lm - 24°	A321	14W - 1650lm - 922lm - 36°	A322	14W - 1650lm - 830lm - 55°
TONDO R-4.4	A323	20W - 2343lm - 1569lm - 15°	A324	20W - 2343lm - 1639lm - 24°	A325	20W - 2343lm - 1681lm - 36°	A326	20W - 2343lm - 1592lm - 50°
	A327	25W - 2569lm - 1857lm - 15°	A328	25W - 2569lm - 1956lm - 24°	A329	25W - 2569lm - 2016lm - 36°	A330	25W - 2569lm - 1945lm - 50°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/15°/3000K/Ra90




7W/24°/3000K/Ra90




7W/36°/3000K/Ra90




9W/15°/3000K/Ra90

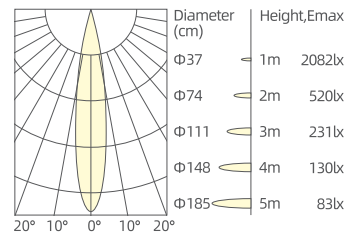


9W/24°/3000K/Ra90




9W/36°/3000K/Ra90




9W/15°/3000K/Ra90




9W/24°/3000K/Ra90

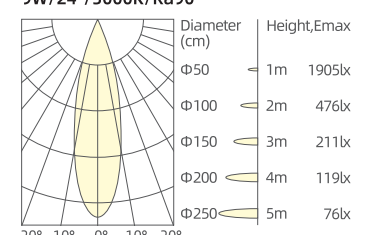


9W/36°/3000K/Ra90




9W/50°/3000K/Ra90

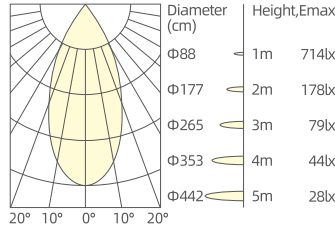


10.5W/15°/3000K/Ra90




10.5W/24°/3000K/Ra90

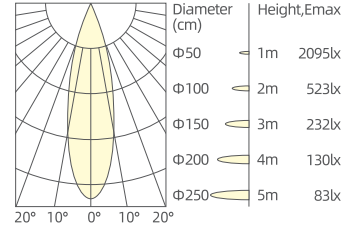


10.5W/36°/3000K/Ra90

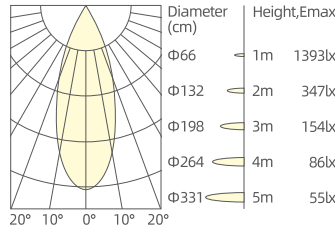


10.5W/50°/3000K/Ra90




10W/36°/3000K/Ra90




10W/55°/3000K/Ra90

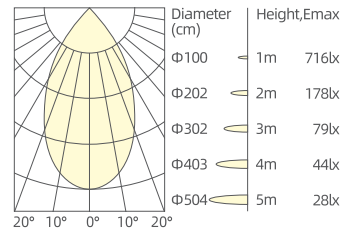


10W/15°/3000K/Ra90




10W/24°/3000K/Ra90




14W/36°/3000K/Ra90




14W/55°/3000K/Ra90

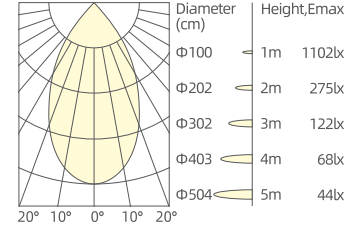


14W/15°/3000K/Ra90




14W/24°/3000K/Ra90




20W/36°/3000K/Ra90




20W/50°/3000K/Ra90

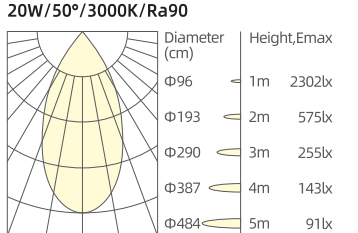


20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




25W/36°/3000K/Ra90




25W/50°/3000K/Ra90

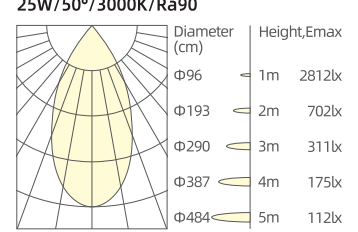

25W/15°/3000K/Ra90



25W/24°/3000K/Ra90



Optical Accessories

