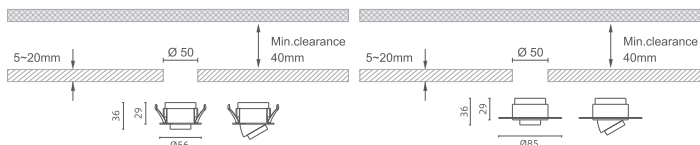
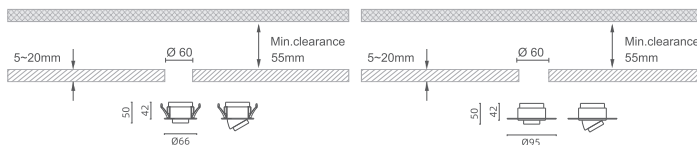
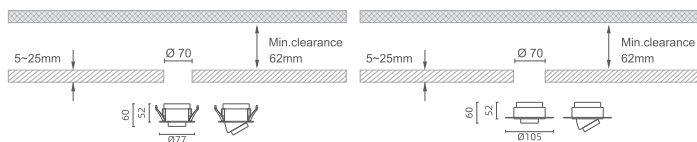


TONDO R-5.1

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO R-5.2

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO R-5.3

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO R-V
EN

The CITIZEN-LED 3.5W Architectural Lighting fixture is designed for precision and efficiency in compact applications. With 3.5W LED power and 4W system power, it achieves an LED output of 426lm and system output between 243lm and 255lm. Available beam angles of 15°, 24°, and 36° provide versatile lighting options. This fixture features a 3000K color temperature and CRI > 90 for excellent color accuracy. The drive operates at 36V 100mA. It has IP ratings of 20 and 54 and a standard CCT range from 2700K to 6000K. Control options include on/off, DALI, 0/1-10V, and TRIAC. Optical accessories, such as the E01 honeycomb louver (IP20) and E02, E03, and E04 lenses (IP54), offer protection and customization. Front ring colors are available in white and black.

IT

L'apparecchio di illuminazione architettonica CITIZEN-LED 3.5W è progettato per garantire precisione ed efficienza in applicazioni compatte. Con una potenza LED di 3,5 W e una potenza del sistema di 4 W, raggiunge un'uscita LED di 426 lm e un'uscita di sistema compresa tra 243 lm e 255 lm. Gli angoli d'emissione disponibili di 15°, 24° e 36° offrono opzioni di illuminazione versatili. Questo apparecchio è dotato di una temperatura di colore di 3000K e CRI > 90 per un'eccellente precisione del colore. L'azionamento funziona a 36V 100mA. Ha un grado di protezione IP di 20 e 54 e una gamma CCT standard da 2700K a 6000K. Le opzioni di controllo includono on/off, DALI, 0/1-10V e TRIAC. Gli accessori ottici, come la feritoia a nido d'ape E01 (IP20) e le lenti E02, E03 ed E04 (IP54), offrono protezione e personalizzazione. I colori dell'anello frontale sono disponibili in bianco e nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO R-5.1	A331	4W - 426lm - 255lm - 15°	A332	4W - 426lm - 255lm - 24°	A333	4W - 426lm - 255lm - 36°
TONDO R-5.2	A336	4W - 358lm - 203lm - 15°	A337	4W - 358lm - 230lm - 24°	A338	4W - 358lm - 250lm - 36°
	A340	5W - 413lm - 231lm - 15°	A341	5W - 413lm - 262lm - 24°	A342	5W - 413lm - 285lm - 36°
TONDO R-5.3	A344	6W - 512lm - 413lm - 15°	A345	6W - 512lm - 397lm - 24°	A346	6W - 512lm - 419lm - 36°
	A348	8W - 621lm - 504lm - 15°	A349	8W - 621lm - 484lm - 24°	A350	8W - 621lm - 512lm - 36°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


4W/15°/3000K/Ra90

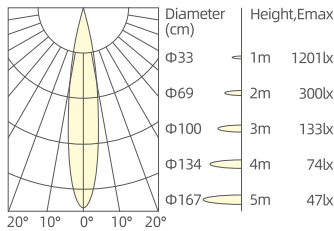


4W/24°/3000K/Ra90

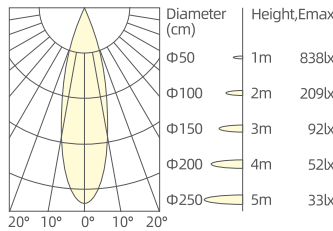


4W/36°/3000K/Ra90




4W/50°/3000K/Ra90

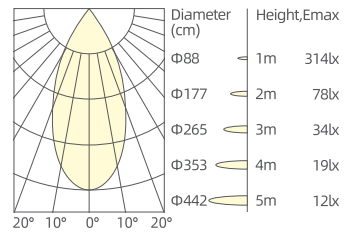


5W/15°/3000K/Ra90

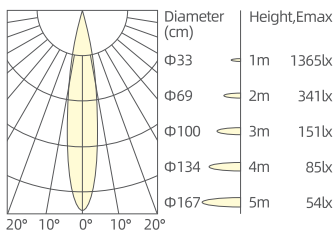


5W/24°/3000K/Ra90




5W/36°/3000K/Ra90

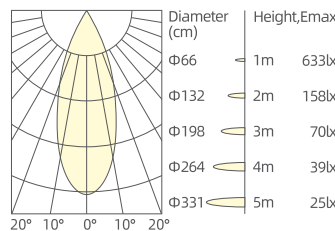


5W/50°/3000K/Ra90

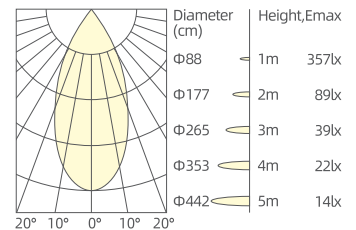


6W/15°/3000K/Ra90

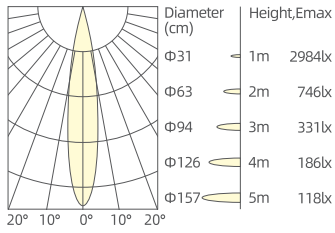


6W/24°/3000K/Ra90

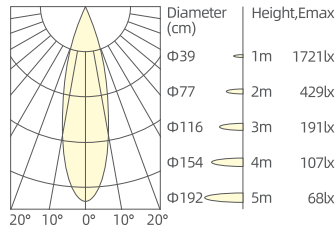


6W/36°/3000K/Ra90




6W/50°/3000K/Ra90

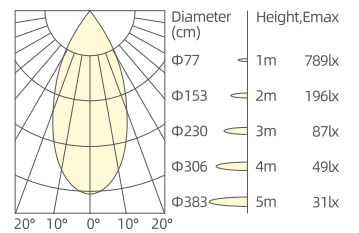


8W/15°/3000K/Ra90

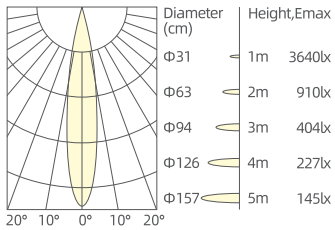


8W/24°/3000K/Ra90




8W/36°/3000K/Ra90

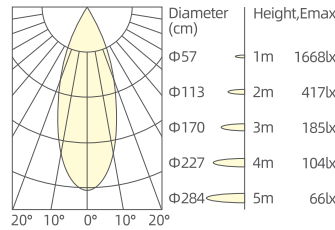


8W/50°/3000K/Ra90

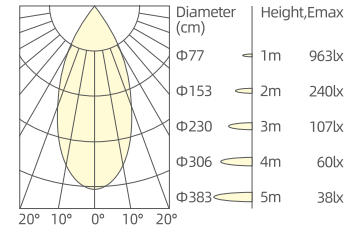


4W/15°/3000K/Ra90




4W/24°/3000K/Ra90

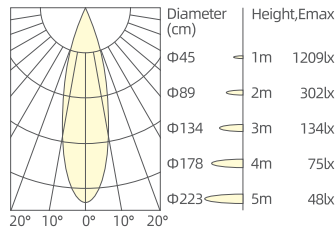


4W/36°/3000K/Ra90




4W/50°/3000K/Ra90

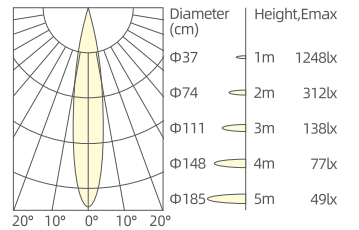

4W/24°/3000K/Ra90



4W/36°/3000K/Ra90



Optical Accessories

