
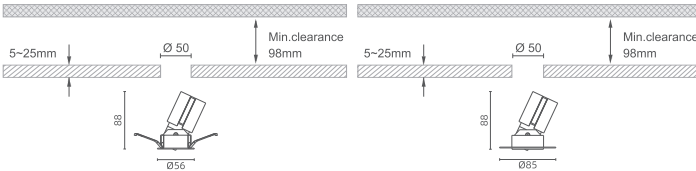



TONDO R-6.1

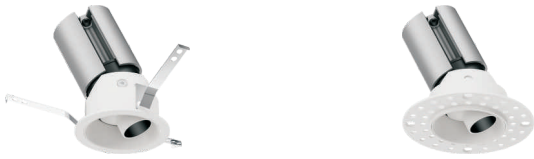

TR - Trim Adjustable

TS - Trimless Adjustable


TONDO R-6.2

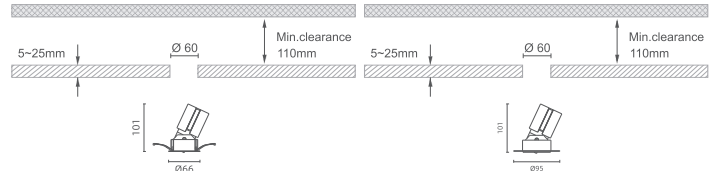

TR - Trim Adjustable

TS - Trimless Adjustable


TONDO R-6.3

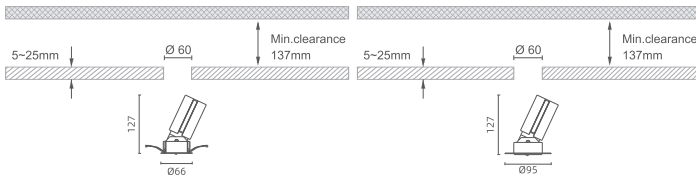

TR - Trim Adjustable

TS - Trimless Adjustable


TONDO R-6.4

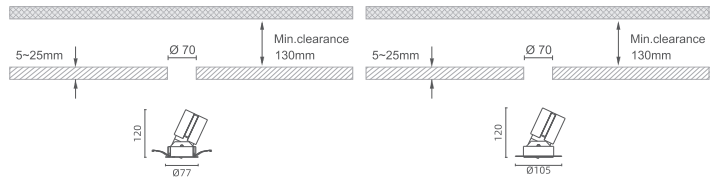

TR - Trim Adjustable

TS - Trimless Adjustable


TONDO R-6.5

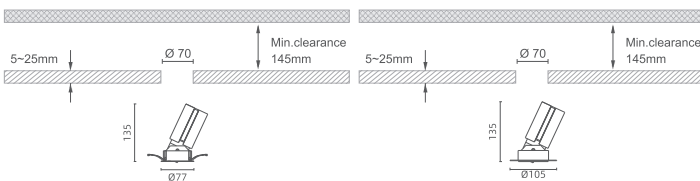

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO R-6.6

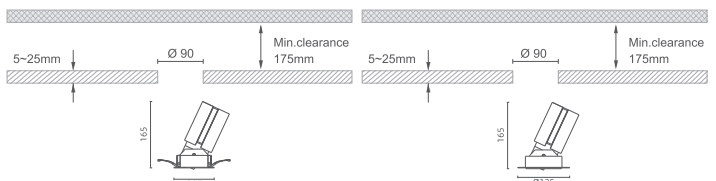

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO R-VI**EN**

CITIZEN LED 4.5W/6.5W/8W Architectural Lighting: CITIZEN LED architectural lighting is designed for precise and efficient illumination. It operates with LED power ranging from 6.5W to 8W and system power of 7W to 9W. Offering LED output from 652lm to 815lm and system output between 60lm and 570lm, it is perfect for tailored lighting solutions. Beam angle options include 10°, 15°, 24°, 36°, and 45°, paired with a standard CCT of 3000K (customizable from 2700K to 6000K) and CRI >90 for superior color accuracy. Compatible with On/Off, DALI, 0/1-10V, and TRIAC controls, it adapts to diverse applications. Standard front rings are available in white or black, with IP20 and IP54 ratings. Optical protection includes honeycomb louvers (IP20) and a range of lens options (IP54), ensuring versatility and durability for any architectural setting.

IT

Illuminazione architettonica CITIZEN LED 4,5 W/6,5 W/8 W: l'illuminazione architettonica CITIZEN LED è progettata per un'illuminazione precisa ed efficiente. Funziona con una potenza dei LED che va da 6,5W a 8W e una potenza di sistema da 7W a 9W. Con un'uscita LED da 652 lm a 815 lm e un'uscita di sistema compresa tra 60 lm e 570 lm, è perfetto per soluzioni di illuminazione su misura. Le opzioni dell'angolo del fascio includono 10°, 15°, 24°, 36° e 45°, abbinate a un CCT standard di 3000K (personalizzabile da 2700K a 6000K) e CRI >90 per una precisione del colore superiore. Compatibile con i controlli On/Off, DALI, 0/1-10V e TRIAC, si adatta a diverse applicazioni. Gli anelli frontali standard sono disponibili in bianco o nero, con grado di protezione IP20 e IP54. La protezione ottica include lamelle a nido d'ape (IP20) e una gamma di opzioni di lenti (IP54), garantendo versatilità e durata per qualsiasi ambiente architettonico.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO R-6.1	A352	7W - 652lm - 168lm - 10°	A353	7W - 652lm - 371lm - 15°	A354	7W - 652lm - 419lm - 24°	A355	7W - 652lm - 456lm - 36°
	A356	7W - 652lm - 375lm - 45°	A357	9W - 815lm - 216lm - 10°	A358	9W - 815lm - 463lm - 15°	A359	9W - 815lm - 524lm - 24°
	A360	9W - 815lm - 570lm - 36°	A361	9W - 815lm - 469lm - 45°				
TONDO R-6.2	A362	7W - 484lm - 299lm - 8°	A363	7W - 652lm - 499lm - 15°	A364	8W - 922lm - 622lm - 24°	A365	8W - 922lm - 697lm - 36°
	A366	8W - 922lm - 669lm - 45°	A367	8W - 922lm - 655lm - 55°	A368	9W - 815lm - 576lm - 15°	A369	10W - 1067lm - 760lm - 24°
	A370	10W - 1067lm - 842lm - 36°	A371	10W - 1067lm - 828lm - 45°	A372	10W - 1067lm - 729lm - 55°		
TONDO R-6.3	A373	10.5W - 951lm - 639lm - 15°	A374	11.5W - 1320lm - 843lm - 24°	A375	11.5W - 1320lm - 976lm - 36°	A376	11.5W - 1320lm - 905lm - 45°
	A377	11.5W - 1320lm - 885lm - 55°	A378	12.5W - 1087lm - 695lm - 15°	A379	14W - 1650lm - 1037lm - 24°	A380	14W - 1650lm - 1142lm - 36°
	A381	14W - 1650lm - 1116lm - 45°	A382	14W - 1650lm - 1082lm - 55°				
TONDO R-6.4	A383	9W - 951lm - 675lm - 15°	A384	10W - 1067lm - 916lm - 24°	A385	10W - 1067lm - 940lm - 36°	A386	10W - 1067lm - 941lm - 55°
	A387	10.5W - 1087lm - 731lm - 15°	A388	11W - 792lm - 545lm - 10°	A389	11.5W - 1320lm - 1047lm - 24°	A390	11.5W - 1320lm - 1096lm - 36°
	A391	11.5W - 1320lm - 1076lm - 55°	A392	12W - 946lm - 660lm - 10°				
TONDO R-6.5	A393	12.5W - 1087lm - 870lm - 15°	A394	14W - 1650lm - 1281lm - 24°	A395	14W - 1650lm - 1340lm - 36°	A396	14W - 1650lm - 1331lm - 55°
	A397	14.5W - 946lm - 707lm - 10°	A398	20W - 1926lm - 1225lm - 15°	A399	20W - 2343lm - 1767lm - 24°	A400	20W - 2343lm - 1897lm - 36°
	A401	20W - 2343lm - 1848lm - 55°						
TONDO R-6.6	A402	27.5W - 2939lm - 1842lm - 15°	A403	27.5W - 3066lm - 2292lm - 24°	A404	27.5W - 3066lm - 2483lm - 36°	A405	27.5W - 3066lm - 2379lm - 55°
	A406	36W - 3285lm - 1989lm - 15°	A407	36W - 3960lm - 2893lm - 24°	A408	36W - 3960lm - 2999lm - 36°	A409	36W - 3960lm - 2828lm - 55°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/10°/3000K/Ra90




7W/15°/3000K/Ra90




7W/24°/3000K/Ra90




9W/24°/3000K/Ra90




7W/36°/3000K/Ra90




7W/45°/3000K/Ra90




9W/36°/3000K/Ra90




9W/45°/3000K/Ra90




9W/10°/3000K/Ra90




9W/15°/3000K/Ra90




7W/15°/3000K/Ra90




8W/24°/3000K/Ra90




7W/8°/3000K/Ra90




8W/36°/3000K/Ra90




8W/45°/3000K/Ra90




8W/55°/3000K/Ra90




7W/8°/3000K/Ra90




7W/15°/3000K/Ra90




8W/24°/3000K/Ra90




12.5W/15°/3000K/Ra90




8W/36°/3000K/Ra90




8W/45°/3000K/Ra90




8W/55°/3000K/Ra90




14W/24°/3000K/Ra90




14W/36°/3000K/Ra90




14W/45°/3000K/Ra90




14W/55°/3000K/Ra90




12.5W/15°/3000K/Ra90

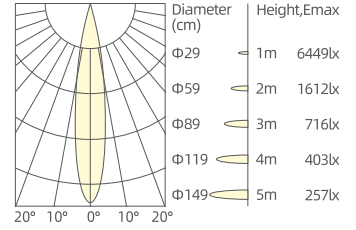


14W/24°/3000K/Ra90




14W/36°/3000K/Ra90




14W/45°/3000K/Ra90




14W/55°/3000K/Ra90

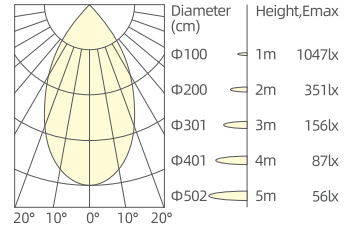


11W/10°/3000K/Ra90




9W/15°/3000K/Ra90




10W/24°/3000K/Ra90




9W/15°/3000K/Ra90

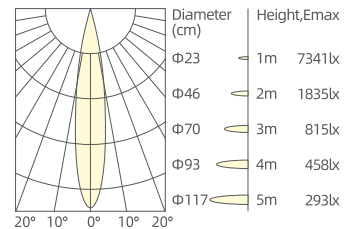


10W/36°/3000K/Ra90




10W/55°/3000K/Ra90




10W/36°/3000K/Ra90




10W/55°/3000K/Ra90

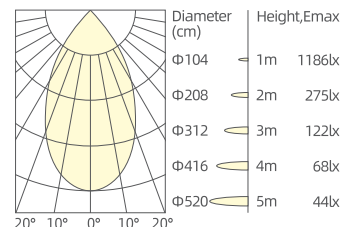


14.5W/10°/3000K/Ra90




20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




10W/24°/3000K/Ra90

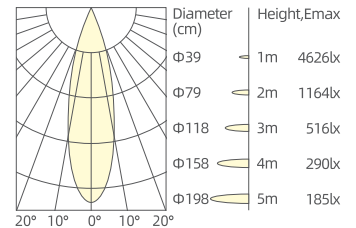


14.5W/10°/3000K/Ra90




20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




11W/10°/3000K/Ra90

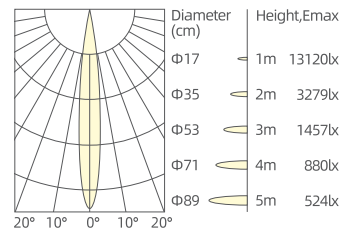


20W/36°/3000K/Ra90




20W/55°/3000K/Ra90




20W/36°/3000K/Ra90




20W/55°/3000K/Ra90

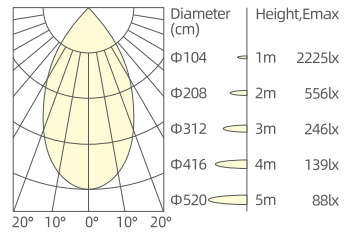


27.5W/15°/3000K/Ra90




27.5W/24°/3000K/Ra90




27.5W/36°/3000K/Ra90




27.5W/55°/3000K/Ra90

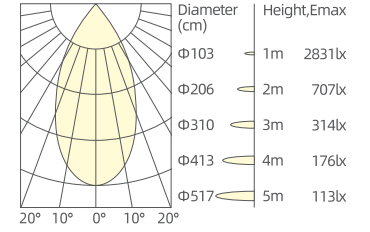


36W/15°/3000K/Ra90




36W/24°/3000K/Ra90



36W/36°/3000K/Ra90



36W/55°/3000K/Ra90

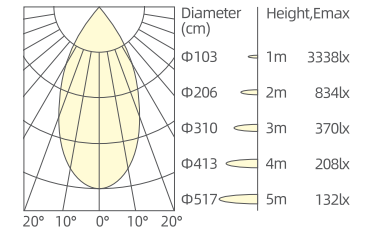

Optical Accessories

