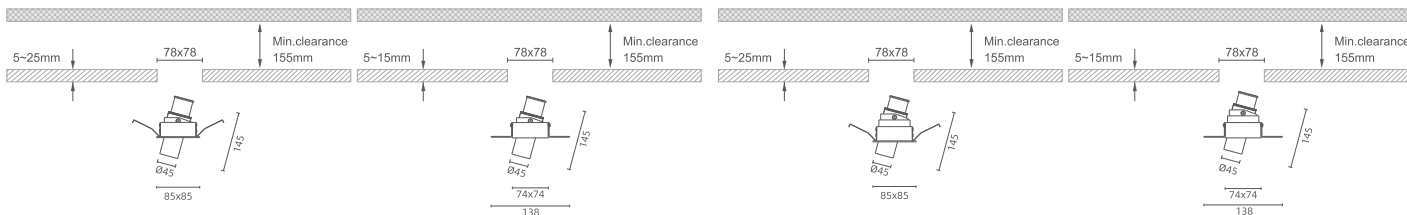


TONDO S-23.1
TONDO S-23.2

TR - Trim Adjustable
TS - Trimless Adjustable
TR - Trim Adjustable
TS - Trimless Adjustable
TONDO S-I
EN

The Citizen LED 8.5/10W/12W Architectural Lighting provides efficient, flexible illumination with LED power options from 8.5W to 12W and system power from 10W to 14W. LED output ranges from 1067lm to 1650lm, with system output from 570lm to 980lm. Beam angles include 15°, 24°, 36°, and 55°, offering versatility for various lighting applications. The standard color temperature (CCT) ranges from 2700K to 6000K, with a default setting of 3000K, and a CRI greater than 90 for superior color accuracy. Powered by a 34V drive (250mA to 350mA), it meets IP20 and IP54 protection standards. Lens options include E01-honeycomb louver, E02-spread, E03-diffusion, and E04-clear. Control systems include On/Off, DALI, 0/1-10V, and TRIAC, with front rings available in white or black.

IT

L'illuminazione architettonica Citizen LED 8,5/10W/12W fornisce un'illuminazione efficiente e flessibile con opzioni di potenza LED da 8,5 W a 12 W e potenza del sistema da 10 W a 14 W. L'uscita LED varia da 1067 lm a 1650 lm, con un'uscita del sistema da 570 lm a 980 lm. Gli angoli del fascio includono 15°, 24°, 36° e 55°, offrendo versatilità per varie applicazioni di illuminazione. La temperatura del colore standard (CCT) varia da 2700K a 6000K, con un'impostazione predefinita di 3000K e un CRI maggiore di 90 per una precisione del colore superiore. Alimentato da un convertitore di frequenza a 34 V (da 250 mA a 350 mA), soddisfa gli standard di protezione IP20 e IP54. Le opzioni dell'obiettivo includono E01-nido d'ape, E02-spread, E03-diffusione ed E04-clear. I sistemi di controllo includono On/Off, DALI, 0/1-10V e TRIAC, con anelli frontali disponibili in bianco o nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

| | | | | | | | | |
|---------------------|-------------|----------------------------|-------------|----------------------------|-------------|----------------------------|-------------|----------------------------|
| TONDO S-23.1 | B306 | 10W - 1067lm - 570lm - 15° | B307 | 10W - 1067lm - 637lm - 24° | B308 | 10W - 1067lm - 599lm - 36° | B309 | 10W - 1067lm - 539lm - 55° |
| | B310 | 14W - 1650lm - 877lm - 15° | B311 | 14W - 1650lm - 980lm - 24° | B312 | 14W - 1650lm - 922lm - 36° | B313 | 14W - 1650lm - 830lm - 55° |
| TONDO S-23.2 | B306 | 10W - 1067lm - 570lm - 15° | B307 | 10W - 1067lm - 637lm - 24° | B308 | 10W - 1067lm - 599lm - 36° | B309 | 10W - 1067lm - 539lm - 55° |
| | B310 | 14W - 1650lm - 877lm - 15° | B311 | 14W - 1650lm - 980lm - 24° | B312 | 14W - 1650lm - 922lm - 36° | B313 | 14W - 1650lm - 830lm - 55° |

| Mode | Finish | CCT/CRI | | IP | Dim | | Emergency |
|------------------------|--------------|---------------------|----------------------------|-------------|------------------|------------|-----------|
| TR Trim Version | W - WHITE | K1 - 2700K /90 | K2 - 3000K /90 | 1 - IP20 | A - On/Off | B - DALI | Y- Yes |
| TS Trimless Version | B - BLACK | K3 - 3500K /90 | K4 - 4000K /90 | 2 - IP54 | C - 0/1-10v | D - TRIAC | N- No |
| | | K5 - 5000K /90 | K6 - 2700-6000K /90 | | E - BLUETOOTH | F - ZIGBEE | |
| | | K7 - 1800-4000K /90 | K8 - DTW-1800-3000K /90 | | G - CASAMBI | | |


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


10W/15°/3000K/Ra90

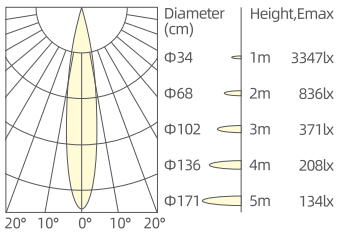


10W/24°/3000K/Ra90

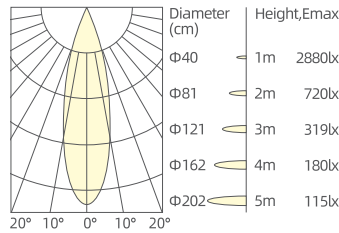


10W/36°/3000K/Ra90

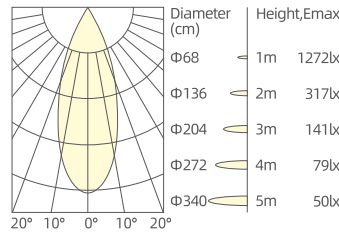


10W/55°/3000K/Ra90

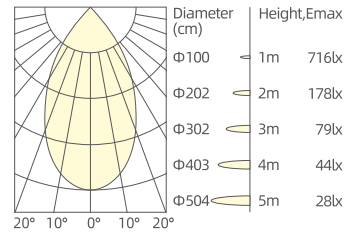


14W/15°/3000K/Ra90

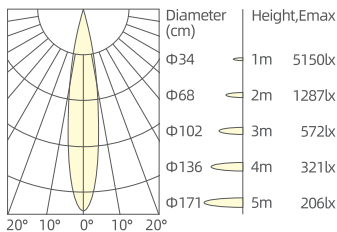


14W/24°/3000K/Ra90

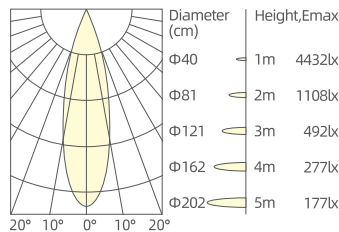

14W/36°/3000K/Ra90

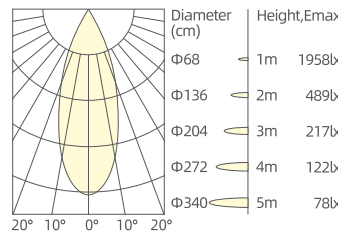

14W/55°/3000K/Ra90

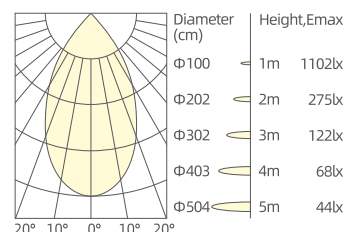

Optical Accessories

