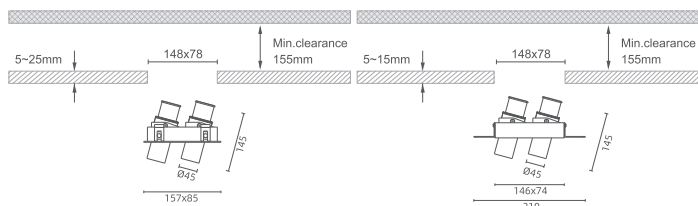
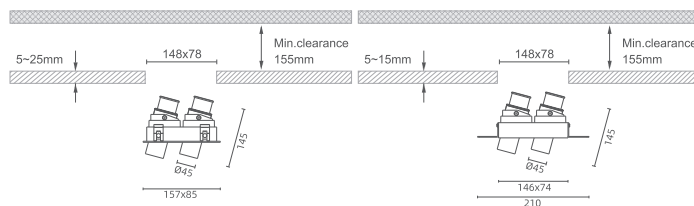


TONDO S-24.1

TONDO S-24.2

TR - Trim Adjustable
TS - Trimless Adjustable

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO S-II
EN

The Citizen LED 8.5/10W/12W Architectural Lighting delivers efficient and customizable illumination with LED power ranging from 8.5W to 12W and system power from 10W to 14W. LED output spans from 1067lm to 1650lm, while system output ranges from 570lm to 830lm. Choose from beam angles of 15°, 24°, 36°, and 55° for versatile lighting options. The standard color temperature (CCT) is adjustable from 2700K to 6000K, with a default setting of 3000K and a CRI greater than 90 for accurate color rendering. Powered by a 34V drive (250mA to 350mA), the light is available with IP20 and IP54 ratings. Lens options include E01-honeycomb louver, E02-spread, E03-diffusion, and E04-clear. The control system supports On/Off, DALI, 0/1-10V, and TRIAC, with front rings in white or black.

IT

L'illuminazione architettonica Citizen LED 8,5/10W/12W offre un'illuminazione efficiente e personalizzabile con una potenza del LED che va da 8,5 W a 12 W e una potenza del sistema da 10 W a 14 W. L'uscita del LED va da 1067 lm a 1650 lm, mentre l'uscita del sistema varia da 570 lm a 830 lm. Scegli tra angoli di fascio di 15°, 24°, 36° e 55° per opzioni di illuminazione versatili. La temperatura di colore standard (CCT) è regolabile da 2700K a 6000K, con un'impostazione predefinita di 3000K e un CRI maggiore di 90 per una resa cromatica accurata. Alimentata da un azionamento a 34 V (da 250 mA a 350 mA), la luce è disponibile con grado di protezione IP20 e IP54. Le opzioni dell'obiettivo includono E01-feritoia a nido d'ape, E02-spread, E03-diffusione ed E04-clear. Il sistema di controllo supporta On/Off, DALI, 0/1-10V e TRIAC, con anelli frontali in bianco o nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO S-24.1	B322	2x10W - 2134lm - 1140lm - 15°	B323	2x10W - 2134lm - 1274lm - 24°	B324	2x10W - 2134lm - 1198lm - 36°	B325	2x10W - 2134lm - 1078lm - 55°
	B326	2x14W - 3300lm - 1754lm - 15°	B327	2x14W - 3300lm - 1960lm - 24°	B328	2x14W - 3300lm - 1844lm - 36°	B329	2x14W - 3300lm - 1660lm - 55°
TONDO S-24.2	B322	2x10W - 2134lm - 1140lm - 15°	B323	2x10W - 2134lm - 1274lm - 24°	B324	2x10W - 2134lm - 1198lm - 36°	B325	2x10W - 2134lm - 1078lm - 55°
	B326	2x14W - 3300lm - 1754lm - 15°	B327	2x14W - 3300lm - 1960lm - 24°	B328	2x14W - 3300lm - 1844lm - 36°	B329	2x14W - 3300lm - 1660lm - 55°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


2x10W/15°/3000K/Ra90




2x10W/24°/3000K/Ra90




2x10W/36°/3000K/Ra90




2x10W/55°/3000K/Ra90

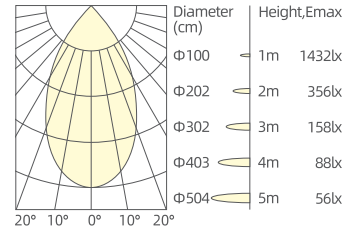


2x14W/15°/3000K/Ra90




2x14W/24°/3000K/Ra90



2x14W/36°/3000K/Ra90



2x14W/55°/3000K/Ra90

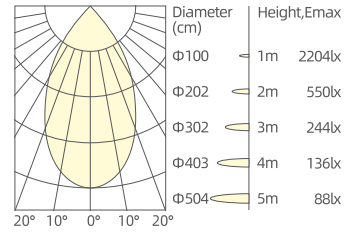

Optical Accessories

