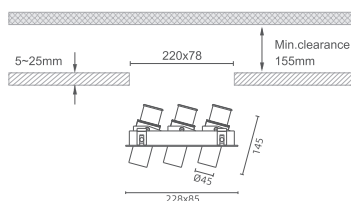


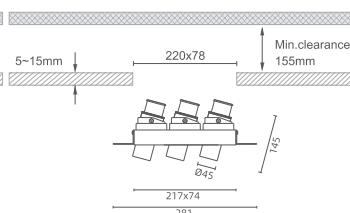


**TONDO S-25.1**
**TONDO S-25.2**

**TR - Trim Adjustable**

**TS - Trimless Adjustable**

**TR - Trim Adjustable**

**TS - Trimless Adjustable**

## TONDO S-III

### EN

The Citizen LED 8.5/10W/12W Architectural Lighting offers a range of versatile and efficient lighting solutions. LED power options range from 2x8.5W to 2x12W, with system power between 2x10W and 2x14W. LED output spans from 2134lm to 3300lm, and system output ranges from 1140lm to 1660lm. Available beam angles are 15°, 24°, 36°, and 55°. The standard color temperature (CCT) ranges from 2700K to 6000K, with a normal setting of 3000K and a CRI greater than 90. The driver operates at 34V, with current options from 250mA to 350mA. IP ratings are 20 and 54, with a range of optical protection lenses, including honeycomb louver, spread, diffusion, and clear. Control options include On/Off, DALI, 0/1-10V, and TRIAC, with standard front rings in white and black.

### IT

L'illuminazione architettonica Citizen LED 8,5/10W/12W offre una gamma di soluzioni di illuminazione versatili ed efficienti. Le opzioni di alimentazione dei LED vanno da 2x8,5 W a 2x12 W, con una potenza del sistema compresa tra 2x10 W e 2x14 W. L'uscita LED varia da 2134 lm a 3300 lm e l'uscita del sistema varia da 1140 lm a 1660 lm. Gli angoli del fascio disponibili sono 15°, 24°, 36° e 55°. La temperatura di colore standard (CCT) varia da 2700K a 6000K, con un'impostazione normale di 3000K e un CRI maggiore di 90. Il driver funziona a 34V, con opzioni di corrente da 250mA a 350mA. I gradi di protezione IP sono 20 e 54, con una gamma di lenti di protezione ottica, tra cui feritoia a nido d'ape, diffusione, diffusione e trasparente. Le opzioni di controllo includono On/Off, DALI, 0/1-10V e TRIAC, con anelli frontali standard in bianco e nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

<b>TONDO S-25.1</b>	<b>B338</b>	3x10W - 3201lm - 1710lm - 15°	<b>B339</b>	3x10W - 3201lm - 1911lm - 24°	<b>B340</b>	3x10W - 3201lm - 1797lm - 36°	<b>B341</b>	3x10W - 3201lm - 1617lm - 55°
	<b>B342</b>	3x14W - 4950lm - 2631lm - 15°	<b>B343</b>	3x14W - 4950lm - 2940lm - 24°	<b>B344</b>	3x14W - 4950lm - 2766lm - 36°	<b>B345</b>	3x14W - 4950lm - 2490lm - 55°
<b>TONDO S-25.2</b>	<b>B338</b>	3x10W - 3201lm - 1710lm - 15°	<b>B339</b>	3x10W - 3201lm - 1911lm - 24°	<b>B340</b>	3x10W - 3201lm - 1797lm - 36°	<b>B341</b>	3x10W - 3201lm - 1617lm - 55°
	<b>B342</b>	3x14W - 4950lm - 2631lm - 15°	<b>B343</b>	3x14W - 4950lm - 2940lm - 24°	<b>B344</b>	3x14W - 4950lm - 2766lm - 36°	<b>B345</b>	3x14W - 4950lm - 2490lm - 55°

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


### Code Example

A001 TA W K11 A Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


**3x10W/15°/3000K/Ra90**




**3x10W/24°/3000K/Ra90**




**3x10W/36°/3000K/Ra90**




**3x10W/55°/3000K/Ra90**

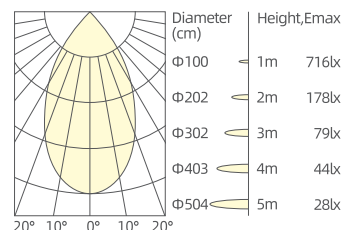


**3x14W/15°/3000K/Ra90**




**3x14W/24°/3000K/Ra90**



**3x14W/36°/3000K/Ra90**



**3x14W/55°/3000K/Ra90**

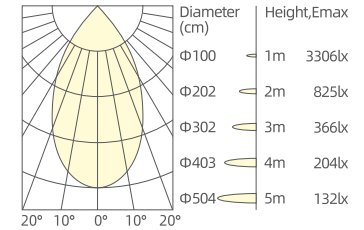

### Optical Accessories

- OR01  
Honeycomb Louver
- OR02  
Spread Lens
- OR03  
Diffusion Lens
- OR04  
Clear Lens