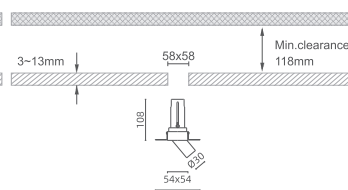
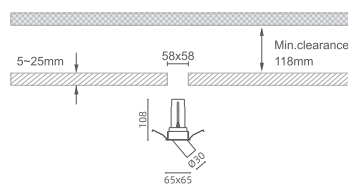
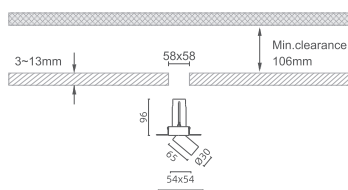
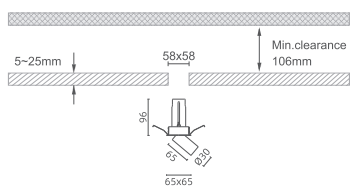


TONDO S-5.1
TONDO R-5.2

TR - Trim Adjustable
TS - Trimless Adjustable
TR - Trim Adjustable
TS - Trimless Adjustable
TONDO R-V
EN

The Citizen LED 5.5/7W Architectural Lighting provides versatile, efficient illumination with LED power from 5.5W to 7W and system power from 7W to 9W. The LED output ranges between 604lm and 796lm, while the system output spans 304lm to 594lm. Available beam angles of 15°, 24°, and 36° offer tailored lighting options. With a typical color temperature of 3000K (adjustable from 2700K to 6000K) and a CRI over 90, it ensures high-quality color rendering. Operating at 36V with 150mA to 200mA, it includes standard front rings in white and black. IP20 and IP54 ratings are available, along with control options like On/Off, DALI, 0/1-10V, and TRIAC, plus various lens choices (E01-honeycomb louver, E02-spread lens, E03-diffusion lens and E04-clear) for light diffusion.

IT

L'illuminazione architettonica Citizen LED 5,5/7W fornisce un'illuminazione versatile ed efficiente con potenza LED da 5,5W a 7W e potenza di sistema da 7W a 9W. L'uscita LED varia tra 604 lm e 796 lm, mentre l'uscita del sistema va da 304 lm a 594 lm. Gli angoli di emissione disponibili di 15°, 24° e 36° offrono opzioni di illuminazione su misura. Con una temperatura di colore tipica di 3000K (regolabile da 2700K a 6000K) e un CRI superiore a 90, garantisce una resa cromatica di alta qualità. Funziona a 36 V con 150 mA a 200 mA, include anelli frontali standard in bianco e nero. Sono disponibili gradi di protezione IP20 e IP54, oltre a opzioni di controllo come On/Off, DALI, 0/1-10V e TRIAC, oltre a varie scelte di lenti (E01-nido d'ape, E02-lente di diffusione, E03-lente di diffusione e E04-trasparente) per la diffusione della luce.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO R-5.1	A331	7W - 604lm - 304lm - 15°	A332	7W - 604lm - 370lm - 24°	A333	7W - 604lm - 407lm - 36°	A334	9W - 796lm - 255lm - 15°
	A335	9W - 796lm - 594lm - 24°	B066	9W - 796lm - 534lm - 36°				
TONDO R-5.2	A336	7W - 604lm - 304lm - 15°	A337	7W - 604lm - 370lm - 24°	A338	7W - 604lm - 407lm - 36°	A339	9W - 796lm - 255lm - 15°
	A340	9W - 796lm - 594lm - 24°	A341	9W - 796lm - 534lm - 36°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/15°/3000K/Ra90

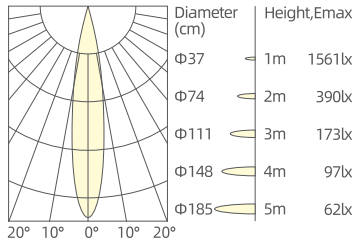


7W/24°/3000K/Ra90

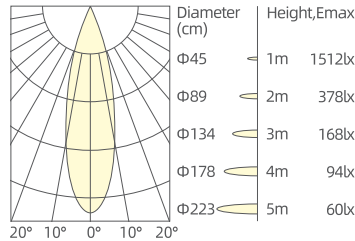


7W/36°/3000K/Ra90

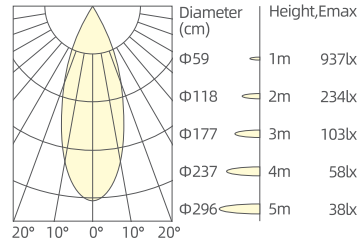


9W/15°/3000K/Ra90

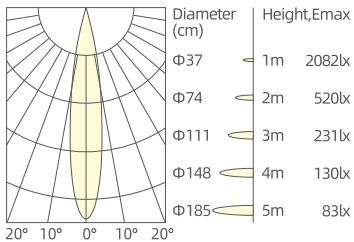

9W/24°/3000K/Ra90

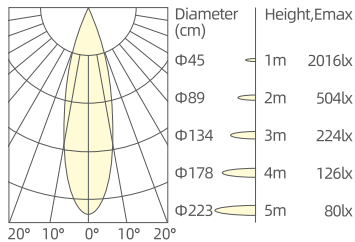

9W/36°/3000K/Ra90

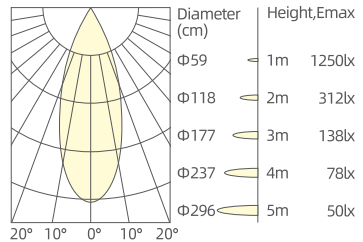

Optical Accessories

