


TONDO S-7.1

TONDO S-7.2

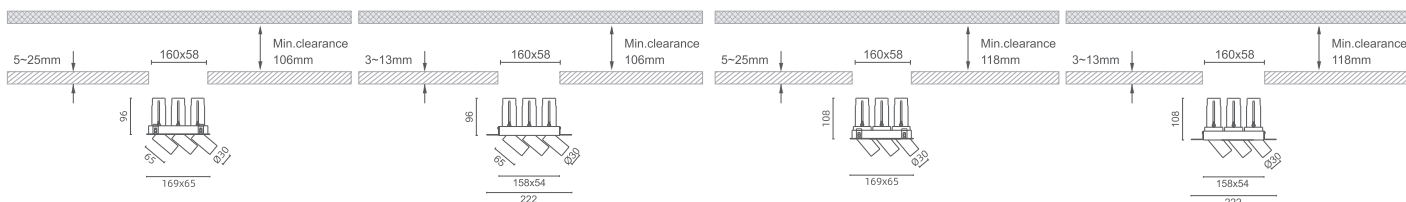

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO R-VII

EN

The Citizen LED 5.5/7W Architectural Lighting offers powerful, adaptable lighting with LED power from 2x5.5W to 2x7W and system power between 2x7W and 2x9W. It delivers a bright LED output of 1208lm to 1592lm and system output of 608lm to 1068lm. Available beam angles of 15°, 24°, and 36° provide versatility in coverage, while the standard color temperature is 3000K, adjustable from 2700K to 6000K, with a CRI above 90 for accurate color quality. Operating at 36V (150mA to 200mA), the fixture is available with white or black front rings. It's rated IP20 and IP54 and supports TRIAC, DALI, 0/1-10V, and On/Off control options, with optical lens choices for honeycomb, spread, diffusion, and clear.

IT

L'illuminazione architettonica Citizen LED 5,5/7W offre un'illuminazione potente e adattabile con potenze LED da 2x5,5W a 2x7W e potenze di sistema comprese tra 2x7W e 2x9W. Offre un'uscita LED luminosa da 1208 lm a 1592 lm e un'uscita di sistema da 608 lm a 1068 lm. Gli angoli del fascio disponibili di 15°, 24° e 36° offrono versatilità nella copertura, mentre la temperatura di colore standard è 3000K, regolabile da 2700K a 6000K, con un CRI superiore a 90 per una qualità del colore accurata. Funzionante a 36 V (da 150 mA a 200 mA), l'apparecchio è disponibile con anelli frontali bianchi o neri. Ha un grado di protezione IP20 e IP54 e supporta le opzioni di controllo TRIAC, DALI, 0/1-10V e On/Off, con lenti ottiche per

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO S-7.1	B090	3x7W - 1812lm - 912lm - 15°	B091	3x7W - 1812lm - 1110lm - 24°	B092	3x7W - 1812lm - 1221lm - 36°	B093	3x9W - 2388lm - 1218lm - 15°
	B094	3x9W - 2388lm - 1782lm - 24°	B095	3x9W - 2388lm - 1602lm - 36°				
TONDO S-7.2	B096	3x7W - 1812lm - 912lm - 15°	B097	3x7W - 1812lm - 1110lm - 24°	B098	3x7W - 1812lm - 1221lm - 36°	B099	3x9W - 2388lm - 1218lm - 15°
	B100	3x9W - 2388lm - 1782lm - 24°	B101	3x9W - 2388lm - 1602lm - 36°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


3x7W/15°/3000K/Ra90

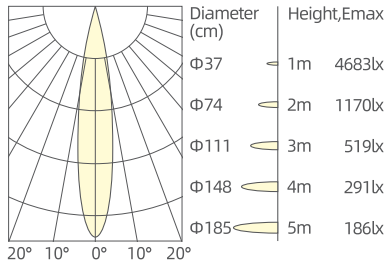


3x7W/24°/3000K/Ra90

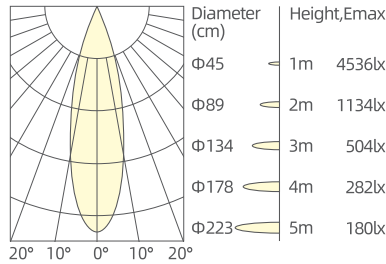


3x7W/36°/3000K/Ra90

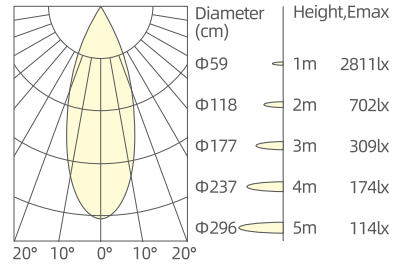


3x9W/15°/3000K/Ra90

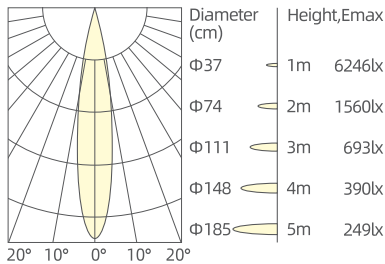

3x9W/24°/3000K/Ra90

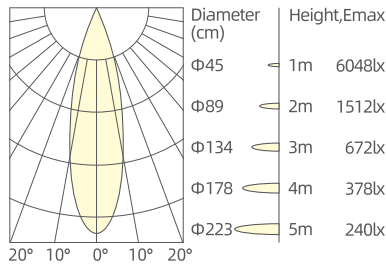

3x9W/36°/3000K/Ra90

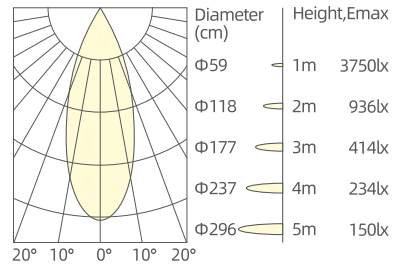

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens