


TONDO V-11.1

TONDO V-11.2

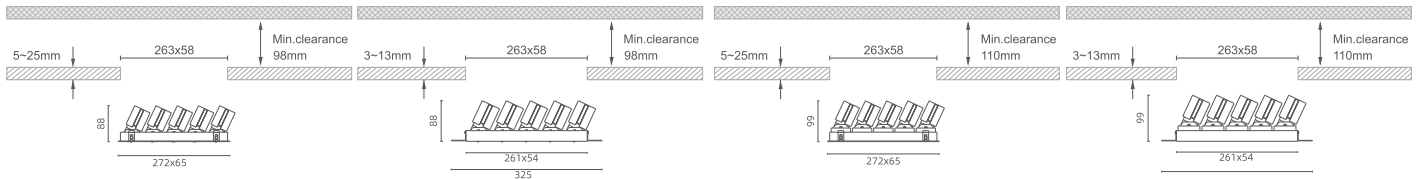

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO V-XV

EN

The Citizen LED 4.5W/6.5W/8W Architectural Lighting offers high-efficiency illumination with LED power ranging from 3x6.5W to 3x8W and system power from 3x7W to 3x9W. It delivers LED output from 1956lm to 2445lm, with system output between 180lm and 1407lm. Available beam angles include 10°, 15°, 24°, 36°, and 45°. Operating at 32V 200mA to 32V 250mA, it ensures optimal performance. The standard CCT ranges from 2700K to 6000K, with a normal 3000K setting, and a CRI > 90 for excellent color rendering. Rated IP20 and IP54 for protection, the lighting includes honeycomb, spread, diffusion, and clear lenses. Standard control options include On/Off, DALI, 0/1-10V, and TRIAC, with front rings available in white and black.

IT

L'illuminazione architettonica Citizen LED 4,5W/6,5W/8W offre un'illuminazione ad alta efficienza con potenze LED che vanno da 3x6,5W a 3x8W e potenze di sistema da 3x7W a 3x9W. Fornisce un'uscita LED da 1956 lm a 2445 lm, con un'uscita del sistema compresa tra 180 lm e 1407 lm. Gli angoli del fascio disponibili includono 10°, 15°, 24°, 36° e 45°. Funzionante a 32V 200mA a 32V 250mA, garantisce prestazioni ottimali. Il CCT standard varia da 2700K a 6000K, con un'impostazione normale di 3000K e un CRI > 90 per un'eccellente resa cromatica. Grado di protezione IP20 e IP54, l'illuminazione include lenti a nido d'ape, a diffusione, a diffusione e trasparenti. Le opzioni di controllo standard includono On/Off, DALI, 0/1-10V e TRIAC, con anelli frontali disponibili in bianco e nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO V-11.1	B492	5x7W - 3260lm - 300lm - 10°	B493	5x7W - 3260lm - 1855lm - 15°	B494	5x7W - 3260lm - 2095lm - 24°	B495	5x7W - 3260lm - 2280lm - 36°
	B496	5x7W - 3260lm - 1875lm - 45°	B497	5x9W - 4075lm - 375lm - 10°	B498	5x9W - 4075lm - 2315lm - 15°	B499	5x9W - 4075lm - 2620lm - 24°
	B500	5x9W - 4075lm - 2850lm - 36°	B501	5x9W - 4075lm - 2345lm - 45°				
TONDO V-11.2	B502	5x7W - 3260lm - 300lm - 10°	B503	5x7W - 3260lm - 1855lm - 15°	B504	5x7W - 3260lm - 2095lm - 24°	B505	5x7W - 3260lm - 2280lm - 36°
	B506	5x7W - 3260lm - 1875lm - 45°	B507	5x9W - 4075lm - 375lm - 10°	B508	5x9W - 4075lm - 2315lm - 15°	B509	5x9W - 4075lm - 2620lm - 24°
	B510	5x9W - 4075lm - 2850lm - 36°	B511	5x9W - 4075lm - 2345lm - 45°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90	G - CASAMBI			


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


5x7W/10°/3000K/Ra90




5x7W/15°/3000K/Ra90




5x7W/24°/3000K/Ra90




5x7W/36°/3000K/Ra90




5x7W/45°/3000K/Ra90

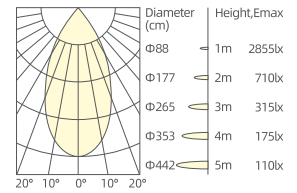


5x9W/10°/3000K/Ra90




5x9W/15°/3000K/Ra90




5x9W/24°/3000K/Ra90



5x9W/36°/3000K/Ra90



5x9W/45°/3000K/Ra90



Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens