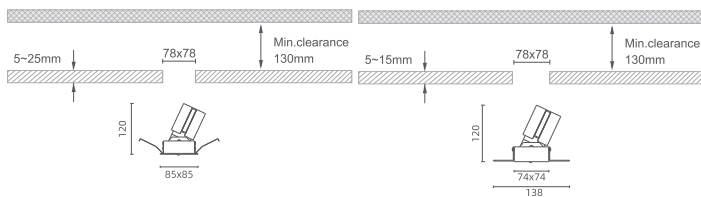
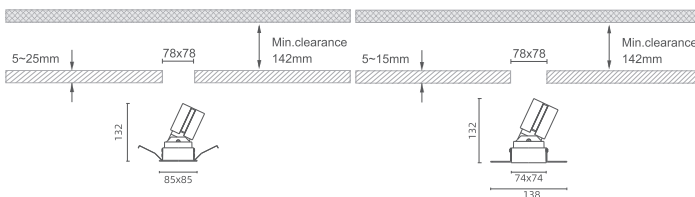
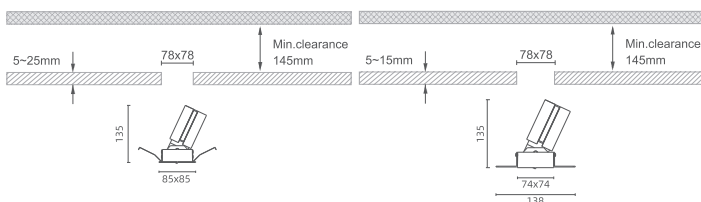
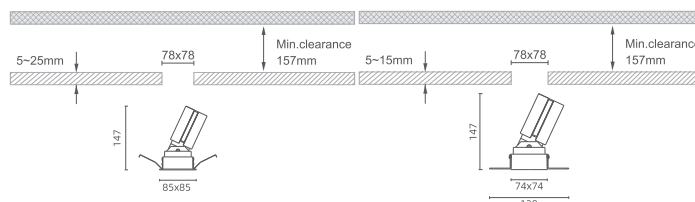


TONDO V-12.1

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO V-12.2

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO V-12.3

TR - Trim Adjustable
TS - Trimless Adjustable
TONDO V-12.4

TR - Trim Adjustable
TS - Trimless Adjustable

TONDO V-XVI

EN

The Citizen LED 8.5W/10W Architectural Lighting features LED power from 9W to 10W and system power from 11W to 12W, offering LED output between 792lm and 1320lm and system output ranging from 545lm to 1079lm. The beam options include 10°, 15°, 24°, 36°, and 55° for flexible illumination. With a drive range of 36V 250mA to 34V 300mA, this fixture provides superior performance. The standard CCT is 2700K to 6000K, with 3000K as the normal setting, and CRI > 90. The unit has IP20 and IP54 protection, with honeycomb, spread, diffusion, and clear lenses. Standard control options include On/Off, DALI, 0/1-10V, and TRIAC, with white and black front rings.

IT

L'illuminazione architettonica Citizen LED 8.5W/10W è dotata di potenza LED da 9W a 10W e potenza di sistema da 11W a 12W, offrendo un'uscita LED compresa tra 792lm e 1320lm e un'uscita di sistema che va da 545lm a 1079lm. Le opzioni del fascio includono 10°, 15°, 24°, 36° e 55° per un'illuminazione flessibile. Con una gamma di azionamento da 36 V 250 mA a 34 V 300 mA, questo dispositivo offre prestazioni superiori. Il CCT standard è compreso tra 2700K e 6000K, con 3000K come impostazione normale e CRI > 90. L'unità ha un grado di protezione IP20 e IP54, con lenti a nido d'ape, di diffusione, di diffusione e trasparenti. Le opzioni di controllo standard includono On/Off, DALI, 0/1-10V e TRIAC, con anelli frontali bianchi e neri.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO V-12.1	B549	9W - 951lm - 675lm - 15°	B433	10W - 1067lm - 916lm - 24°	B434	10W - 1067lm - 940lm - 36°	B435	10W - 1067lm - 941lm - 55°
	B550	10.5W - 1087lm - 731lm - 15°	B437	11W - 792lm - 545lm - 10°	B438	11.5W - 1320lm - 1047lm - 24°	B439	11.5W - 1320lm - 1096lm - 36°
	B555	11.5W - 1320lm - 1079lm - 55°	B441	12W - 946lm - 660lm - 10°				
TONDO V-12.2	B560	9W - 951lm - 675lm - 15°	B443	10W - 1067lm - 916lm - 24°	B444	10W - 1067lm - 940lm - 36°	B445	10W - 1067lm - 941lm - 55°
	B564	10.5W - 1087lm - 731lm - 15°	B447	11W - 792lm - 545lm - 10°	B448	11.5W - 1320lm - 1047lm - 24°	B449	11.5W - 1320lm - 1096lm - 36°
	B570	11.5W - 1320lm - 1079lm - 55°	B451	12W - 946lm - 660lm - 10°				
TONDO V-12.3	B512	12.5W - 1087lm - 870lm - 15°	B513	14W - 1650lm - 1281lm - 24°	B514	14W - 1650lm - 1340lm - 36°	B515	14W - 1650lm - 1331lm - 55°
	B516	14.5W - 946lm - 707lm - 10°	B517	20W - 1926lm - 1225lm - 15°	B518	20W - 2343lm - 1767lm - 24°	B519	20W - 2343lm - 1897lm - 36°
	B520	20W - 2343lm - 1848lm - 55°						
TONDO V-12.4	B531	12.5W - 1087lm - 870lm - 15°	B532	14W - 1650lm - 1281lm - 24°	B533	14W - 1650lm - 1340lm - 36°	B534	14W - 1650lm - 1331lm - 55°
	B535	14.5W - 946lm - 707lm - 10°	B536	20W - 1926lm - 1225lm - 15°	B537	20W - 2343lm - 1767lm - 24°	B538	20W - 2343lm - 1897lm - 36°
	B539	20W - 2343lm - 1848lm - 55°						

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


11W/10°/3000K/Ra90




9W/15°/3000K/Ra90




10W/24°/3000K/Ra90




10W/36°/3000K/Ra90

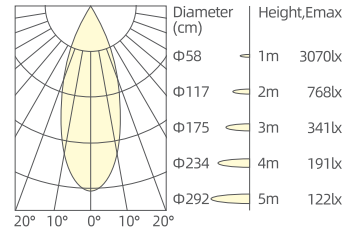


11W/10°/3000K/Ra90




9W/15°/3000K/Ra90




10W/24°/3000K/Ra90




10W/55°/3000K/Ra90

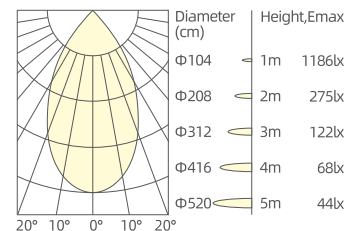


10W/36°/3000K/Ra90




10W/55°/3000K/Ra90




20W/36°/3000K/Ra90




20W/24°/3000K/Ra90

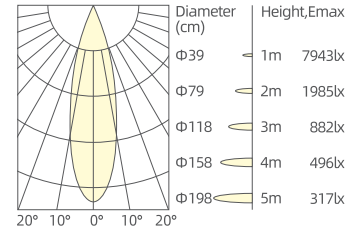


14.5W/10°/3000K/Ra90




20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




20W/55°/3000K/Ra90

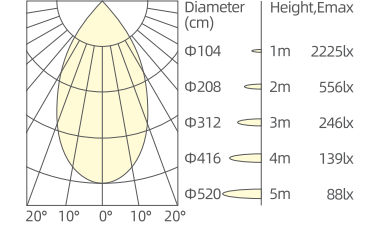


14.5W/10°/3000K/Ra90




20W/15°/3000K/Ra90



20W/36°/3000K/Ra90



20W/55°/3000K/Ra90

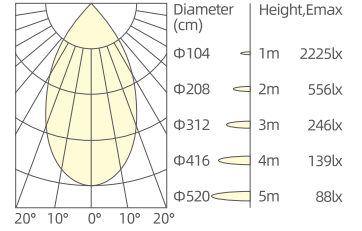

Optical Accessories

