



**TONDO V-13.1**

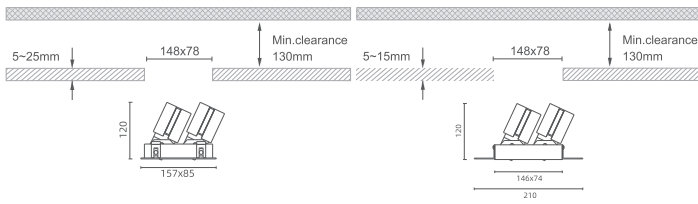

**TR - Trim Adjustable**

**TS - Trimless Adjustable**


**TONDO V-13.2**

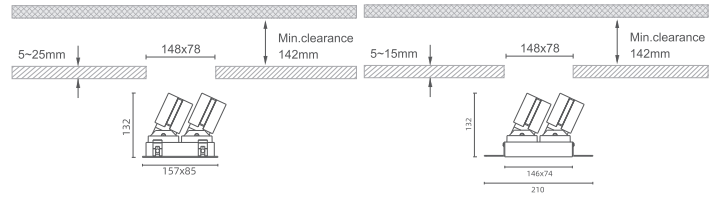

**TR - Trim Adjustable**

**TS - Trimless Adjustable**


**TONDO V-13.3**

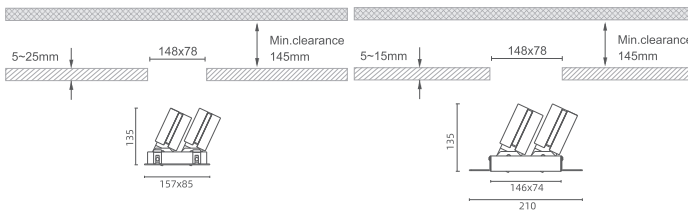

**TR - Trim Adjustable**

**TS - Trimless Adjustable**

**TONDO V-13.4**

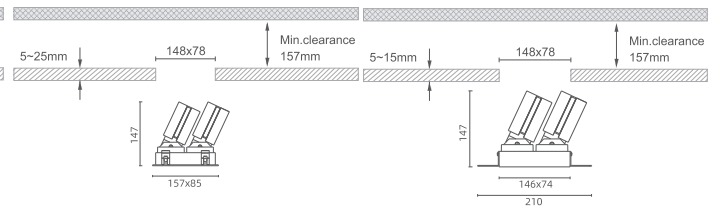

**TR - Trim Adjustable**

**TS - Trimless Adjustable**

## EN

The Citizen LED 8.5W/10W Architectural Lighting is a high-quality lighting solution designed for precise, efficient performance. With an LED power of 2x9W to 2x10W and system power between 2x9W and 2x12W, it delivers LED output from 1584 to 2640 lumens and system output ranging from 1090 to 2192 lumens. The adjustable beam angles (10°, 15°, 24°, 36°, 55°) allow for tailored illumination, while the color temperature spans from 2700K to 6000K, with 3000K as the standard. The drive operates 36V 250mA to 34V 300mA. Rated IP20 and IP54 for durability, it has a CRI >90 for vibrant color rendering. Control systems include On/Off, DALI, 0/1-10V, and TRIAC, with white or black front rings. Lens options such as honeycomb louver, spread, diffusion, and clear provide IP20/IP54 optical protection.

## IT

L'illuminazione architettonica Citizen LED 8,5 W/10 W è una soluzione di illuminazione di alta qualità progettata per prestazioni precise ed efficienti. Con una potenza LED da 2x9W a 2x10W e una potenza di sistema compresa tra 2x9W e 2x12W, fornisce un'uscita LED da 1584 a 2640 lumen e un'uscita di sistema da 1090 a 2192 lumen. Gli angoli del fascio regolabili (10°, 15°, 24°, 36°, 55°) consentono un'illuminazione personalizzata, mentre la temperatura di colore va da 2700K a 6000K, con 3000K come standard. L'azionamento funziona da 36 V 250 mA a 34 V 300 mA. Classificato IP20 e IP54 per una maggiore durata, ha un CRI >90 per una resa cromatica vibrante. I sistemi di controllo includono On/Off, DALI, 0/1-10V e TRIAC, con anelli frontali bianchi o neri. Le opzioni di lenti come la feritoia a nido d'ape, la diffusione, la diffusione e la trasparenza forniscono una protezione ottica IP20/IP54.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

<b>TONDO V-13.1</b>	<b>B550</b>	2x9W - 1902lm - 1350lm - 15°	<b>B551</b>	2x10W - 2134lm - 1832lm - 24°	<b>B552</b>	2x10W - 2134lm - 1880lm - 36°	<b>B553</b>	2x10W - 2134lm - 1882lm - 55°
	<b>B554</b>	2x10.5W - 2174lm - 1462lm - 15°	<b>B555</b>	2x11W - 1584lm - 1090lm - 10°	<b>B556</b>	2x11.5W - 2640lm - 2094lm - 24°	<b>B557</b>	2x11.5W - 2640lm - 2192lm - 36°
	<b>B558</b>	2x11.5W - 2640lm - 2158lm - 55°	<b>B559</b>	2x12W - 1892lm - 1320lm - 10°				
<b>TONDO V-13.2</b>	<b>B562</b>	2x9W - 1902lm - 1350lm - 15°	<b>B563</b>	2x10W - 2134lm - 1832lm - 24°	<b>B564</b>	2x10W - 2134lm - 1880lm - 36°	<b>B565</b>	2x10W - 2134lm - 1882lm - 55°
	<b>B566</b>	2x10.5W - 2174lm - 1462lm - 15°	<b>B567</b>	2x11W - 1584lm - 1090lm - 10°	<b>B568</b>	2x11.5W - 2640lm - 2094lm - 24°	<b>B569</b>	2x11.5W - 2640lm - 2192lm - 36°
	<b>B570</b>	2x11.5W - 2640lm - 2158lm - 55°	<b>B571</b>	2x12W - 1892lm - 1320lm - 10°				
<b>TONDO V-13.3</b>	<b>B574</b>	2x12.5W - 2174lm - 1740lm - 15°	<b>B575</b>	2x14W - 1650lm - 1281lm - 24°	<b>B576</b>	2x14W - 1650lm - 1340lm - 36°	<b>B577</b>	2x14W - 1650lm - 1331lm - 55°
	<b>B578</b>	2x14.5W - 1892lm - 1414lm - 10°	<b>B579</b>	2x20W - 1926lm - 1225lm - 15°	<b>B580</b>	2x20W - 4686lm - 3534lm - 24°	<b>B581</b>	2x20W - 2343lm - 1897lm - 36°
	<b>B582</b>	2x20W - 4686lm - 3696lm - 55°						
<b>TONDO V-13.4</b>	<b>B586</b>	2x12.5W - 2174lm - 1740lm - 15°	<b>B587</b>	2x14W - 1650lm - 1281lm - 24°	<b>B588</b>	2x14W - 1650lm - 1340lm - 36°	<b>B589</b>	2x14W - 1650lm - 1331lm - 55°
	<b>B590</b>	2x14.5W - 1892lm - 1414lm - 10°	<b>B591</b>	2x20W - 1926lm - 1225lm - 15°	<b>B592</b>	2x20W - 4686lm - 3534lm - 24°	<b>B593</b>	2x20W - 2343lm - 1897lm - 36°
	<b>B594</b>	2x20W - 4686lm - 3696lm - 55°						

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


### Code Example

A001 TA W K11 A Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


2x14.5W/10°/3000K/Ra90




2x20W/15°/3000K/Ra90




2x20W/24°/3000K/Ra90




2x20W/36°/3000K/Ra90

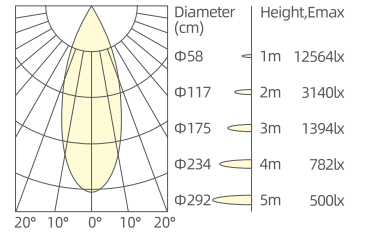


2x11W/10°/3000K/Ra90




2x9W/15°/3000K/Ra90




2x10W/24°/3000K/Ra90




2x10W/36°/3000K/Ra90

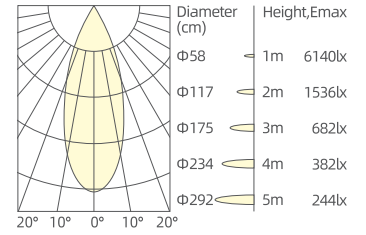

2x10W/55°/3000K/Ra90



2x20W/55°/3000K/Ra90



Optical Accessories

