



TONDO V-14.1

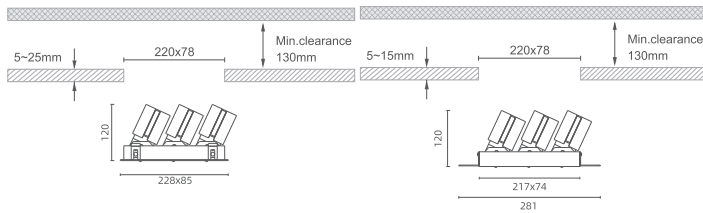

TR - Trim Adjustable

TS - Trimless Adjustable


TONDO V-14.2

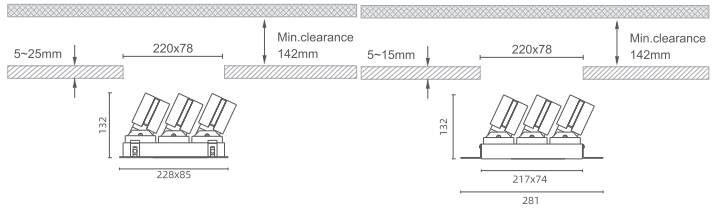

TR - Trim Adjustable

TS - Trimless Adjustable


TONDO V-14.3

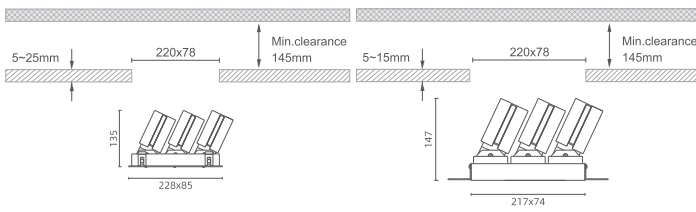

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO V-14.4

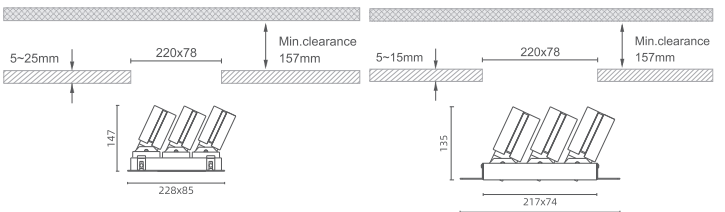

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO V-XVIII

EN

The Citizen LED 8.5W/10W Architectural Lighting offers efficient and customizable illumination for a wide range of architectural applications. With LED power ranging from 3x8W to 3x10W and system power from 3x9W to 3x11.5W, it provides LED output from 2376 to 3960 lumens and system output from 1635 to 3237 lumens. The fixture offers flexible beam angles (10°, 15°, 24°, 36°, and 55°) for precise light control. Its color temperature range spans from 2700K to 6000K, with a standard setting of 3000K. With CRI >90 and IP20 and IP54 ratings, it ensures excellent color rendering and durability. The fixture supports On/Off, DALI, 0/1-10V, and TRIAC controls and is available in white or black finishes, with optional lenses (honeycomb, spread, diffusion, and clear) for additional optical protection.

IT

L'illuminazione architettonica Citizen LED 8,5W/10W offre un'illuminazione efficiente e personalizzabile per un'ampia gamma di applicazioni architettoniche. Con una potenza dei LED che va da 3x8W a 3x10W e una potenza del sistema da 3x9W a 3x11.5W, fornisce un'uscita LED da 2376 a 3960 lumen e un'uscita del sistema da 1635 a 3237 lumen. L'apparecchio offre angoli di emissione flessibili (10°, 15°, 24°, 36° e 55°) per un controllo preciso della luce. La sua gamma di temperature di colore va da 2700K a 6000K, con un'impostazione standard di 3000K. Con CRI >90 e gradi di protezione IP20 e IP54, garantisce un'eccellente resa cromatica e durata. L'apparecchio supporta i controlli On/Off, DALI, 0/1-10V e TRIAC ed è disponibile nelle finiture bianco o nero, con lenti opzionali (a nido d'ape, diffusione, diffusione e trasparente) per un'ulteriore protezione ottica.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO V-14.1	B644	3x9W - 2853lm - 2025lm - 15°	B645	3x10W - 3201lm - 2748lm - 24°	B646	3x10W - 3201lm - 2820lm - 36°	B647	3x10W - 3201lm - 2823lm - 55°
	B648	3x10.5W - 3261lm - 2193lm - 15°	B649	3x11.5W - 3960lm - 2141lm - 24°	B650	3x11.5W - 3960lm - 3288lm - 36°	B651	3x11.5W - 3960lm - 3237lm - 55°
	B652	3x12W - 2838lm - 1980lm - 10°						
TONDO V-14.2	B656	3x9W - 2853lm - 2025lm - 15°	B657	3x10W - 3201lm - 2748lm - 24°	B658	3x10W - 3201lm - 2820lm - 36°	B659	3x10W - 3201lm - 2823lm - 55°
	B660	3x10.5W - 3261lm - 2193lm - 15°	B661	3x11.5W - 3960lm - 2141lm - 24°	B662	3x11.5W - 3960lm - 3288lm - 36°	B678	3x11.5W - 3960lm - 3237lm - 55°
	B663	3x12W - 2838lm - 1980lm - 10°						
TONDO V-14.3	B667	3x12.5W - 3261lm - 2610lm - 15°	B668	3x14W - 4950lm - 3843lm - 24°	B669	3x14W - 4950lm - 4020lm - 36°	B670	3x14W - 4950lm - 3993lm - 55°
	B671	3x14.5W - 2838lm - 2121lm - 10°	B672	3x20W - 5778lm - 3675lm - 15°	B673	3x20W - 7029lm - 5301lm - 24°	B674	3x20W - 7029lm - 5691lm - 36°
	B675	3x20W - 7029lm - 5544lm - 55°						
TONDO V-14.4	B681	3x12.5W - 3261lm - 2610lm - 15°	B682	3x14W - 4950lm - 3843lm - 24°	B683	3x14W - 4950lm - 4020lm - 36°	B684	3x14W - 4950lm - 3993lm - 55°
	B685	3x14.5W - 2838lm - 2121lm - 10°	B649	3x20W - 5778lm - 3675lm - 15°	B650	3x20W - 7029lm - 5301lm - 24°	B651	3x20W - 7029lm - 5691lm - 36°
	B689	3x20W - 7029lm - 5544lm - 55°						

Mode	Finish	CCT/CRI		IP	Dim		Emergency		
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes		
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No		
		K5 - 5000K /90	K6 - 2700-6000K /90					E - BLUETOOTH	F - ZIGBEE
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90					G - CASAMBI	


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


3x11W/10°/3000K/Ra90




3x9W/15°/3000K/Ra90




3x10W/24°/3000K/Ra90




3x10W/24°/3000K/Ra90

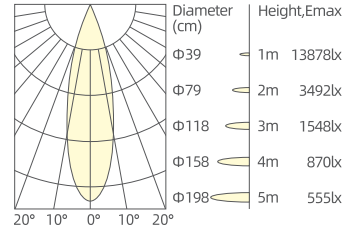


3x10W/36°/3000K/Ra90




3x10W/55°/3000K/Ra90




3x10W/36°/3000K/Ra90




3x10W/55°/3000K/Ra90

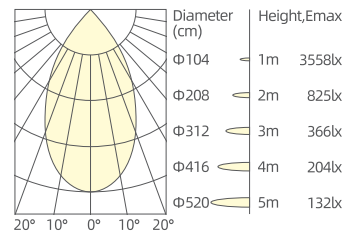


3x11W/10°/3000K/Ra90




3x9W/15°/3000K/Ra90




3x20W/36°/3000K/Ra90




3x20W/55°/3000K/Ra90

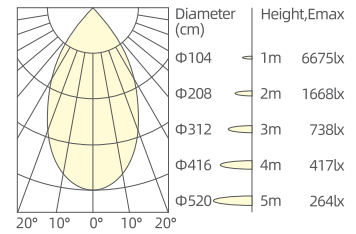


3x14.5W/10°/3000K/Ra90




3x20W/15°/3000K/Ra90




3x20W/24°/3000K/Ra90




3x20W/36°/3000K/Ra90

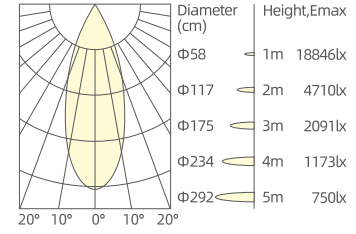


3x20W/55°/3000K/Ra90




3x14.5W/10°/3000K/Ra90



3x20W/15°/3000K/Ra90



3x20W/24°/3000K/Ra90

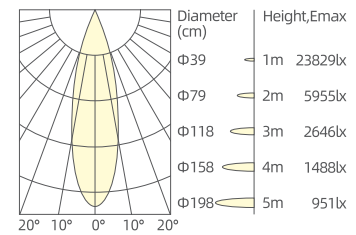

Optical Accessories

