
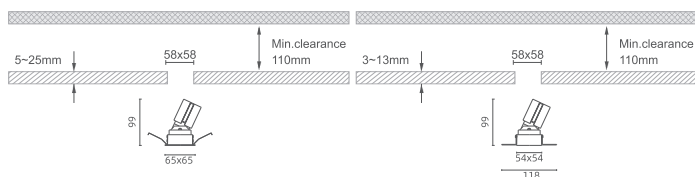


TONDO V-8.1

TONDO V-8.2

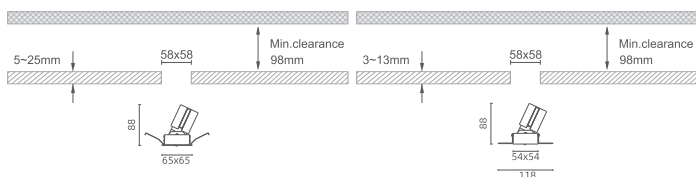

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Adjustable

TS - Trimless Adjustable

TONDO V-XII

EN

The Citizen LED 4.5W/6.5W/8W Architectural Lighting offers efficient illumination with LED power options ranging from 6.5W to 8W and system power from 7W to 9W. It provides an LED output of 652 to 815 lumens and system output between 60 and 570 lumens. The fixture offers beam angles of 10°, 15°, 24°, 36°, and 45° for versatile lighting applications. Standard color temperatures range from 2700K to 6000K, with 3000K as the default, and a CRI over 90 for excellent color accuracy. The drive operates from 32V 200mA to 32V 250mA. Rated IP20 and IP54, it features white and black front rings, and is compatible with On/Off, DALI, 0-10V, and TRIAC control systems. Optical lenses include honeycomb, spread, diffusion, and clear options for customized protection.

IT

L'illuminazione architettonica Citizen LED da 4,5 W/6,5 W/8 W offre un'illuminazione efficiente con opzioni di potenza LED che vanno da 6,5 W a 8 W e potenza del sistema da 7 W a 9 W. Fornisce un'uscita LED da 652 a 815 lumen e un'uscita del sistema compresa tra 60 e 570 lumen. L'apparecchio offre angoli di emissione di 10°, 15°, 24°, 36° e 45° per applicazioni di illuminazione versatili. Le temperature di colore standard vanno da 2700K a 6000K, con 3000K come impostazione predefinita e un CRI superiore a 90 per un'eccellente precisione del colore. L'azionamento funziona da 32V 200mA a 32V 250mA. Classificato IP20 e IP54, è dotato di anelli frontali bianchi e neri ed è compatibile con i sistemi di controllo On/Off, DALI, 0-10V e TRIAC. Le lenti ottiche includono opzioni a nido d'ape, diffusione, diffusione e trasparenti per una protezione personalizzata.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

TONDO V-8.1	B432	7W - 652lm - 60lm - 10°	B433	7W - 652lm - 371lm - 15°	B434	7W - 652lm - 419lm - 24°	B435	7W - 652lm - 456lm - 36°
	B436	7W - 652lm - 375lm - 45°	B437	9W - 815lm - 75lm - 10°	B438	9W - 815lm - 463lm - 15°	B439	9W - 815lm - 524lm - 24°
	B440	9W - 815lm - 570lm - 36°	B441	9W - 815lm - 469lm - 45°				
TONDO V-8.2	B442	7W - 652lm - 60lm - 10°	B443	7W - 652lm - 371lm - 15°	B444	7W - 652lm - 419lm - 24°	B445	7W - 652lm - 456lm - 36°
	B446	7W - 652lm - 375lm - 45°	B447	9W - 815lm - 75lm - 10°	B448	9W - 815lm - 463lm - 15°	B449	9W - 815lm - 524lm - 24°
	B450	9W - 815lm - 570lm - 36°	B451	9W - 815lm - 469lm - 45°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y - Yes
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N - No
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOTH H	F - ZIGBEE	
		K7 - 1800-4000K /90	K8 - DTW-1800-3000K /90		G - CASAMBI		


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/10°/3000K/Ra90




7W/15°/3000K/Ra90




7W/24°/3000K/Ra90




7W/36°/3000K/Ra90




9W/36°/3000K/Ra90




7W/45°/3000K/Ra90




9W/10°/3000K/Ra90




9W/15°/3000K/Ra90



9W/24°/3000K/Ra90



9W/45°/3000K/Ra90



Optical Accessories

OR01



Honeycomb Louver

OR02



Spread Lens

OR03



Diffusion Lens

OR04



Clear Lens