


Venice T-10.1

Venice T-10.2

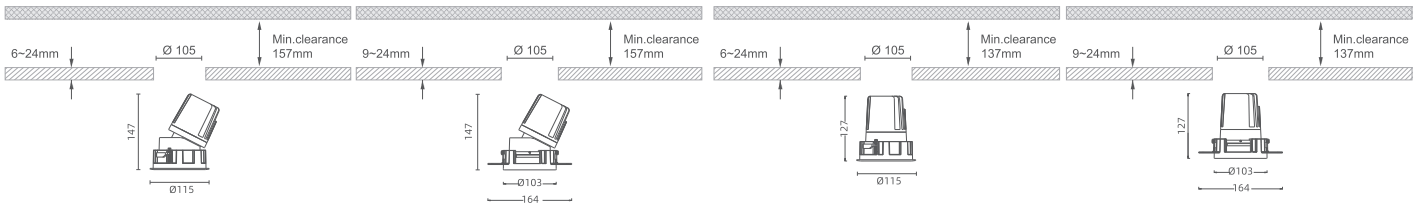

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Fixed

TS - Trimless Fixed

Venice T-XIV

EN

The CITIZEN LED 18W/20.5W Architectural Lighting provides high-performance illumination with LED power ranging from 18W to 20.5W and system power between 20W and 25W. The LED output ranges from 2343lm to 2569lm, while the system output varies from 1346lm to 2064lm. Available beam angles include 15°, 24°, 40°, and 55°. The fixture operates with a drive of 34V 500mA to 34V 600mA. Standard CCT options range from 2700K to 6000K, with 3000K being the typical setting. With IP20 and IP54 protection, a CRI of >90, and control options including On/Off, DALI, 0/1-10V, and TRIAC, it meets a range of lighting needs. Front rings are available in white and black, with additional lens and reflector options. E01-honeycomb louver, E02-spread, E03-diffusion and E04-clear lenses are for IP20 and IP54 optical protection levels.

IT

L'illuminazione architettonica CITIZEN LED 18W/20,5W fornisce un'illuminazione ad alte prestazioni con potenze LED che vanno da 18W a 20,5W e potenze di sistema tra 20W e 25W. L'uscita LED varia da 2343lm a 2569lm, mentre l'uscita del sistema varia da 1346lm a 2064lm. Gli angoli del fascio disponibili includono 15°, 24°, 40° e 55°. L'apparecchio funziona con un azionamento da 34 V 500 mA a 34 V 600 mA. Le opzioni CCT standard vanno da 2700K a 6000K, con 3000K come impostazione tipica. Con protezione IP20 e IP54, un CRI di >90 e opzioni di controllo tra cui On/Off, DALI, 0/1-10V e TRIAC, soddisfa una vasta gamma di esigenze di illuminazione. Gli anelli anteriori sono disponibili in bianco e nero, con opzioni aggiuntive di lenti e riflettori. Le lenti a nido d'ape E01, le lenti E02-spread, E03-diffusion e E04-clear sono per i livelli di protezione ottica IP20 e IP54.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

Venice T-10.1	B898	20W - 2343lm - 1346lm - 15°	B899	20W - 2343lm - 1754lm - 24°	B900	20W - 2343lm - 1743lm - 40°	B901	20W - 2343lm - 1692lm - 55°
	B902	25W - 2569lm - 1585lm - 15°	B903	25W - 2569lm - 2064lm - 24°	B904	25W - 2569lm - 2051lm - 40°	B905	25W - 2569lm - 1992lm - 55°
Venice T-10.2	B906	20W - 2343lm - 1346lm - 15°	B907	20W - 2343lm - 1754lm - 24°	B908	20W - 2343lm - 1743lm - 40°	B909	20W - 2343lm - 1692lm - 55°
	B910	25W - 2569lm - 1585lm - 15°	B911	25W - 2569lm - 2064lm - 24°	B912	25W - 2569lm - 2051lm - 40°	B913	25W - 2569lm - 1992lm - 55°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT	F - ZIGBEE			
					H CASAMBI				


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


20W/15°/3000K/Ra90




20W/24°/3000K/Ra90




20W/40°/3000K/Ra90




20W/55°/3000K/Ra90

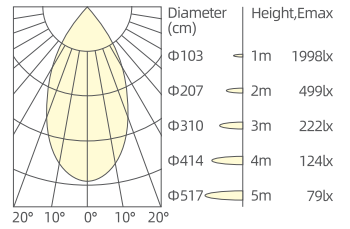


25W/15°/3000K/Ra90




25W/24°/3000K/Ra90



25W/40°/3000K/Ra90



25W/55°/3000K/Ra90

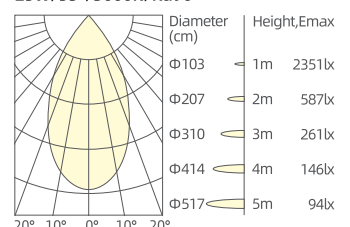

Optical Accessories

- OR01** Honeycomb Louver
- OR02** Spread Lens
- OR03** Diffusion Lens
- OR04** Clear Lens

Colour(Reflector)

- White
- Black
- Silver
- Black chrome