



Venice T-12.1


Venice T-12.2

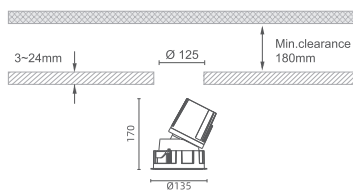


TR - Trim Adjustable

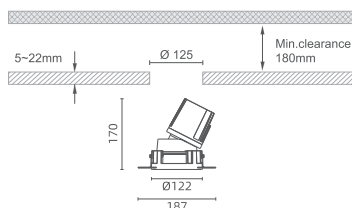

TS - Trimless Adjustable

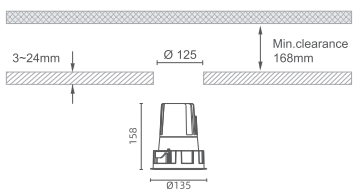

TR - Trim Fixed



TS - Trimless Fixed

Venice T-XVI

EN

The CITIZEN LED 24W/30.5W/37W Architectural Lighting offers high-performance illumination with LED power options ranging from 24W to 37W and system power between 27.5W and 41W. Delivering luminous output of 3066lm to 5193lm (LED) and 1927lm to 3404lm (system), it ensures versatile lighting solutions. Beam angles span from 15° to 50°, and color temperatures range from 2700K to 6000K (standard 3000K) with CRI > 90. Available IP ratings include 20 and 54. The drive operates from 34V 700mA to 34V 1050mA. Control systems include On/Off, DALI, 0-10V, and TRIAC. Accessories like honeycomb louvers, spread, diffusion, and clear lenses enhance optical performance. With reflectors in white, black, silver, and black chrome, and front rings in white or black, this fixture integrates seamlessly into any architectural design.

IT

L'illuminazione architettonica CITIZEN LED 24W/30,5W/37W offre un'illuminazione ad alte prestazioni con opzioni di potenza LED che vanno da 24W a 37W e una potenza di sistema compresa tra 27,5W e 41W. Con un'emissione luminosa da 3066lm a 5193lm (LED) e da 1927lm a 3404lm (sistema), garantisce soluzioni di illuminazione versatili. Gli angoli del fascio vanno da 15° a 50° e le temperature di colore vanno da 2700K a 6000K (standard 3000K) con CRI > 90. I gradi di protezione IP disponibili includono 20 e 54. L'azionamento funziona da 34 V 700 mA a 34 V 1050 mA. I sistemi di controllo includono On/Off, DALI, 0-10V e TRIAC. Accessori come le feritoie a nido d'ape, la diffusione, la diffusione e le lenti trasparenti migliorano le prestazioni ottiche. Con riflettori in bianco, nero, argento e cromo nero e anelli frontali in bianco o nero, questo apparecchio si integra perfettamente in qualsiasi progetto architettonico.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

Venice T-12.1	B930	27.5W - 3066lm - 1927lm - 15°	B931	27.5W - 3066lm - 2124lm - 24°	B932	27.5W - 3066lm - 2328lm - 36°	B933	27.5W - 3066lm - 2455lm - 45°
	B934	27.5W - 3066lm - 2136lm - 50°	B935	41W - 5193lm - 2505lm - 15°	B936	41W - 5193lm - 3025lm - 24°	B937	41W - 5193lm - 3387lm - 36°
	B938	41W - 5193lm - 3404lm - 45°	B939	41W - 5193lm - 3002lm - 50°				
Venice T-12.2	B940	27.5W - 3066lm - 1927lm - 15°	B941	27.5W - 3066lm - 2124lm - 24°	B942	27.5W - 3066lm - 2328lm - 36°	B943	27.5W - 3066lm - 2455lm - 45°
	B944	27.5W - 3066lm - 2136lm - 50°	B945	41W - 5193lm - 2505lm - 15°	B946	41W - 5193lm - 3025lm - 24°	B947	41W - 5193lm - 3387lm - 36°
	B948	41W - 5193lm - 3404lm - 45°	B949	41W - 5193lm - 3002lm - 50°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT	F - ZIGBEE			
					H CASAMBI				


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


27.5W/15°/3000K/Ra90




27.5W/24°/3000K/Ra90




27.5W/36°/3000K/Ra90




27.5W/45°/3000K/Ra90




27.5W/50°/3000K/Ra90




41W/15°/3000K/Ra90




41W/24°/3000K/Ra90




41W/36°/3000K/Ra90



41W/45°/3000K/Ra90



41W/50°/3000K/Ra90



Optical Accessories



Colour(Reflector)

