

Venice T-3.1




Venice T-3.2




Venice T-3.3




Venice T-3.4




TR - Trim Adjustable



TR - Trim Fixed



TR - Trim Adjustable




TR - Trim Fixed


Venice T-3.5



Venice T-3.6



TR - Trim Adjustable



TR - Trim Fixed

Venice T-II

EN

The CITIZEN LED 4.5W/6.5W/8W Architectural Lighting delivers efficient, high-quality illumination with LED power ranging from 6.5W to 8W and system power from 7W to 9W. It provides LED outputs of 621lm to 822lm, and system outputs of 371lm and 469lm. Beam angles are available in 15°, 24°, 36°, and 50° for versatile lighting solutions. The drive operates at 32V 200mA to 32V 250mA. The standard CCT range is 2700K to 6000K, with 3000K as the default. It features a CRI > 90 for exceptional color rendering and is available with IP20 and IP54 protection ratings. E01-honeycomb louver, E02-spread, E03-diffusion and E04-clear lenses are for IP20 and IP54 optical protection levels. Standard control options include On/Off, DALI, 0/1-10V, and TRIAC, while front rings come in white and black, with optional reflectors in white, black, silver, and black chrome.

IT

L'illuminazione architettonica CITIZEN LED da 4,5 W/6,5 W/8 W offre un'illuminazione efficiente e di alta qualità con una potenza dei LED che va da 6,5 W a 8 W e una potenza del sistema da 7 W a 9 W. Fornisce uscite LED da 621 lm a 822 lm e uscite di sistema da 371 lm e 469 lm. Gli angoli del fascio sono disponibili in 15°, 24°, 36° e 50° per soluzioni di illuminazione versatili. L'azionamento funziona da 32 V 200 mA a 32 V 250 mA. L'intervallo CCT standard è compreso tra 2700K e 6000K, con 3000K come impostazione predefinita. È dotato di un CRI > 90 per un'eccezionale resa cromatica ed è disponibile con grado di protezione IP20 e IP54. Le lenti a nido d'ape E01, le lenti E02-spread, E03-diffusion e E04-clear sono per i livelli di protezione ottica IP20 e IP54. Le opzioni di controllo standard includono On/Off, DALI, 0/1-10V e TRIAC, mentre gli anelli anteriori sono disponibili in bianco e nero, con riflettori opzionali in bianco, nero, argento e cromo nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

Venice T-3.1	B712	7W - 621lm - 294lm - 15°	B713	7W - 621lm - 309lm - 24°	B714	7W - 621lm - 341lm - 32°	B715	7W - 621lm - 250lm - 40°
	B716	9W - 822lm - 368lm - 15°	B717	9W - 822lm - 486lm - 24°	B718	9W - 822lm - 427lm - 32°	B719	9W - 822lm - 313lm - 40°
Venice T-3.2	B720	7W - 621lm - 294lm - 15°	B721	7W - 621lm - 309lm - 24°	B722	7W - 621lm - 341lm - 32°	B723	7W - 621lm - 250lm - 40°
	B724	9W - 822lm - 368lm - 15°	B725	9W - 822lm - 486lm - 24°	B726	9W - 822lm - 427lm - 32°	B727	9W - 822lm - 313lm - 40°
Venice T-3.3	B728	9W - 822lm - 426lm - 15°	B729	9W - 822lm - 429lm - 24°	B730	9W - 822lm - 488lm - 36°	B731	9W - 822lm - 465lm - 60°
	B732	11W - 951lm - 512lm - 15°	B733	11W - 951lm - 451lm - 24°	B734	11W - 951lm - 585lm - 36°	B735	11W - 951lm - 558lm - 60°
Venice T-3.4	B736	9W - 822lm - 426lm - 15°	B737	9W - 822lm - 429lm - 24°	B738	9W - 822lm - 488lm - 36°	B739	9W - 822lm - 465lm - 60°
	B740	11W - 951lm - 512lm - 15°	B741	11W - 951lm - 451lm - 24°	B742	11W - 951lm - 585lm - 36°	B743	11W - 951lm - 558lm - 60°
Venice T-3.5	B744	11W - 652lm - 333lm - 8°	B745	11W - 951lm - 4514lm - 15°	B746	11W - 951lm - 555lm - 24°	B747	11W - 951lm - 579lm - 36°
	B748	13W - 721lm - 389lm - 8°	B749	13W - 1087lm - 639lm - 15°	B750	13W - 1087lm - 635lm - 24°	B751	13W - 1087lm - 662lm - 36°
Venice T-3.6	B752	11W - 652lm - 333lm - 8°	B753	11W - 951lm - 4514lm - 15°	B754	11W - 951lm - 555lm - 24°	B755	11W - 951lm - 579lm - 36°
	B756	13W - 721lm - 389lm - 8°	B757	13W - 1087lm - 639lm - 15°	B758	13W - 1087lm - 635lm - 24°	B759	13W - 1087lm - 662lm - 36°

Mode	CCT/CRI		Dim		Colour (Reflector)	
TR Trim Version	K5 - 5000K /90	K4 - 4000K /90	Y- Yes	N- No	W - WHITE	B - BLACK
	K3 - 3500K /90	K2 - 3000K /90			S - SILVER	BC - BLACK CHROME
	K1 - 2700K /90					


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


7W/15°/3000K/Ra90




7W/24°/3000K/Ra90




7W/32°/3000K/Ra90




7W/40°/3000K/Ra90

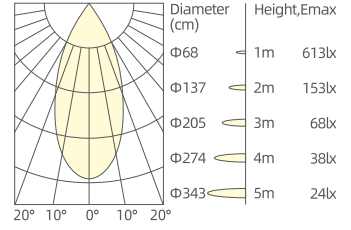


9W/15°/3000K/Ra90




9W/24°/3000K/Ra90



9W/32°/3000K/Ra90



9W/40°/3000K/Ra90

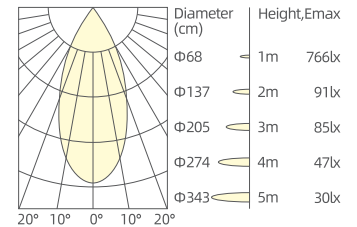

Optical Accessories



Colour(Reflector)



Black