



Venice T-5.1

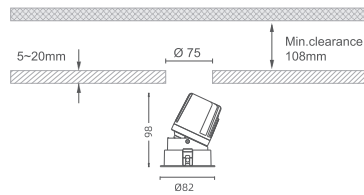

TR - Trim Adjustable

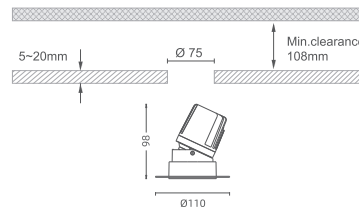

TS - Trimless Adjustable

Venice T-V

EN

The CITIZEN LED 6.5W/8W/9.5W Architectural Lighting offers a versatile and efficient lighting solution with LED power ranging from 8W to 9.5W and system power between 9W and 11W. It provides LED output from 822lm to 951lm, with system output between 426lm and 558lm. Available beam angles include 15°, 24°, 36°, and 60°, allowing for adjustable illumination. The drive operates at 34V 250mA to 34V 300mA. Standard color temperatures range from 2700K to 6000K, with 3000K as the default. It features a high CRI of >90 for accurate color rendering and is compatible with On/Off, DALI, 0/1-10V, and TRIAC control systems. The fixture includes white and black front rings; and E01- honeycomb louver, E02-spread, E03-diffusion and E04-clear optical lenses for IP20 and IP54 protection. The standard reflector comes in black.

IT

L'illuminazione architettonica CITIZEN LED 6.5W/8W/9.5W offre una soluzione di illuminazione versatile ed efficiente con potenze LED che vanno da 8W a 9.5W e potenze di sistema tra 9W e 11W. Fornisce un'uscita LED da 822 lm a 951 lm, con un'uscita del sistema compresa tra 426 lm e 558 lm. Gli angoli del fascio disponibili includono 15°, 24°, 36° e 60°, consentendo un'illuminazione regolabile. L'azionamento funziona da 34 V 250 mA a 34 V 300 mA. Le temperature di colore standard vanno da 2700K a 6000K, con 3000K come impostazione predefinita. È dotato di un CRI elevato di >90 per una resa cromatica accurata ed è compatibile con i sistemi di controllo On/Off, DALI, 0/1-10V e TRIAC. L'apparecchio comprende anelli frontali bianchi e neri; e E01- feritoia a nido d'ape, E02-spread, E03-diffusione e E04-lenti ottiche trasparenti per protezione IP20 e IP54. Il riflettore standard è disponibile in nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

Venice T-5.1	B792	9W - 822lm - 591lm - 15°	B793	9W - 822lm - 629lm - 24°	B794	9W - 822lm - 618lm - 36°	B795	9W - 822lm - 564lm - 60°
	B796	11W - 951lm - 709lm - 15°	B797	11W - 951lm - 754lm - 24°	B798	11W - 951lm - 741lm - 36°	B799	11W - 951lm - 676lm - 60°

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT	F - ZIGBEE			
					H CASAMBI				


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


9W/15°/3000K/Ra90




9W/24°/3000K/Ra90




9W/36°/3000K/Ra90




9W/60°/3000K/Ra90




11W/15°/3000K/Ra90




11W/24°/3000K/Ra90



11W/36°/3000K/Ra90



11W/60°/3000K/Ra90



Optical Accessories

- OR01**

 Honeycomb Louver
- OR02**

 Spread Lens
- OR03**

 Diffusion Lens
- OR04**

 Clear Lens

Colour(Reflector)

- White
- Black
- Silver
- Black chrome