


## Venice T-6.1

## Venice T-6.2

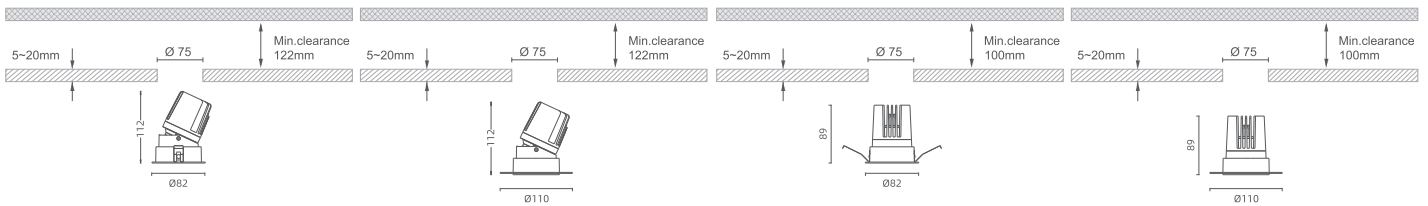

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Fixed

TS - Trimless Fixed

## Venice T-VII

### EN

The CITIZEN LED 8W/9.5W/11W Architectural Lighting delivers powerful, efficient lighting with LED power ranging from 9.5W to 11W and system power from 11W to 13W. It provides LED output from 652lm to 1087lm, and system output between 444lm and 883lm, ensuring bright and consistent illumination. The beam angles available range from 8°, 15°, 24°, 36°, to 60° for versatile lighting options. The drive operates at 36V 300mA to 32V 350mA. With a standard CCT range of 2700K to 6000K (3000K by default) and a CRI > 90, the lighting delivers high-quality color rendering. Control options include On/Off, DALI, 0/1-10V, and TRIAC. Available in white and black front rings, it includes various lenses (E01-honeycomb louver, E02-spread, E03-diffusion and E04-clear) for IP20 and IP54 protection, and reflectors in white, black, silver, and black chrome.

### IT

L'illuminazione architettonica CITIZEN LED 8W/9,5W/11W offre un'illuminazione potente ed efficiente con una potenza dei LED che va da 9,5W a 11W e una potenza del sistema da 11W a 13W. Fornisce un'uscita LED da 652 lm a 1087 lm e un'uscita del sistema tra 444 lm e 883 lm, garantendo un'illuminazione brillante e uniforme. Gli angoli del fascio disponibili vanno da 8° 15°, 24°, 36° a 60° per opzioni di illuminazione versatili. L'azionamento funziona da 36 V 300 mA a 32 V 350 mA. Con una gamma CCT standard da 2700K a 6000K (3000K per impostazione predefinita) e un CRI > 90, l'illuminazione offre una resa cromatica di alta qualità. Le opzioni di controllo includono On/Off, DALI, 0/1-10V e TRIAC. Disponibile con anelli frontali bianchi e neri, include varie lenti (E01-nido d'ape, E02-spread, E03-diffusion ed E04-clear) per la protezione IP20 e IP54 e riflettori in cromo bianco, nero, argento e nero.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

<b>Venice T-6.1</b>	<b>R785</b>	11W - 652lm - 444lm - 8°	<b>R786</b>	11W - 951lm - 745lm - 15°	<b>R787</b>	11W - 951lm - 741lm - 24°	<b>R788</b>	11W - 951lm - 773lm - 36°
	<b>R789</b>	11W - 951lm - 636lm - 60°	<b>R790</b>	13W - 721lm - 519lm - 8°	<b>R791</b>	13W - 1087lm - 852lm - 15°	<b>R792</b>	13W - 1087lm - 847lm - 24°
	<b>R793</b>	13W - 1087lm - 883lm - 36°	<b>R794</b>	13W - 1087lm - 728lm - 60°				
<b>Venice T-6.2</b>	<b>R795</b>	11W - 652lm - 444lm - 8°	<b>R796</b>	11W - 951lm - 745lm - 15°	<b>R797</b>	11W - 951lm - 741lm - 24°	<b>R798</b>	11W - 951lm - 773lm - 36°
	<b>R799</b>	11W - 951lm - 636lm - 60°	<b>R800</b>	13W - 721lm - 519lm - 8°	<b>R801</b>	13W - 1087lm - 852lm - 15°	<b>R802</b>	13W - 1087lm - 847lm - 24°
	<b>R803</b>	13W - 1087lm - 883lm - 36°	<b>R804</b>	13W - 1087lm - 728lm - 60°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT	F - ZIGBEE			
					H CASAMBI				


### Code Example

A001 TA W K11 A Y


### Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


11W/8°/3000K/Ra90




11W/15°/3000K/Ra90




11W/24°/3000K/Ra90




11W/36°/3000K/Ra90




11W/60°/3000K/Ra90




13W/8°/3000K/Ra90




13W/15°/3000K/Ra90




13W/24°/3000K/Ra90



13W/36°/3000K/Ra90



13W/60°/3000K/Ra90



### Optical Accessories

OR01



Honeycomb Louver

OR02



Spread Lens

OR03



Diffusion Lens

OR04



Clear Lens

### Colour(Reflector)



White



Black



Silver



Black chrome