


Venice T-7.1

Venice T-7.2

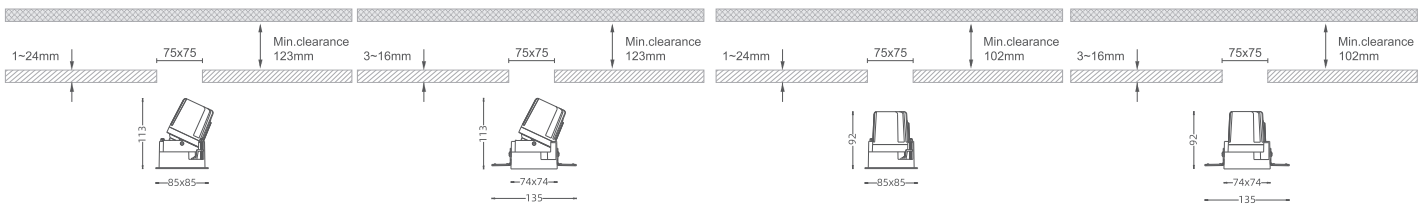

TR - Trim Adjustable

TS - Trimless Adjustable

TR - Trim Fixed

TS - Trimless Fixed

Venice T-X

EN

The CITIZEN-LED 8W/9.5W/11W Architectural Lighting series offers efficient and high-performance lighting with LED power ranging from 9.5W to 11W and system power from 11W to 13W. Providing an LED output of 652lm to 1087lm and system output of 444lm to 883lm, it ensures optimal brightness for various applications. Beam angles from 8° to 60° allow precise light distribution, while the standard CCT range of 2700K to 6000K (3000K typical) and CRI > 90 deliver exceptional color rendering. With IP20 and IP54 ratings, it is suitable for diverse environments. The drive ranges from 36V 300mA to 32V 350mA. Control options include On/Off, DALI, 0/1-10V, and TRIAC. Accessories like E01-honeycomb louver, E02-spread, E03-diffusion and E04-clear lenses enhance customization, and sleek white, black, or silver reflectors complete its modern design.

IT

La serie di illuminazione architettonica CITIZEN-LED 8W/9,5W/11W offre un'illuminazione efficiente e ad alte prestazioni con una potenza dei LED che va da 9,5W a 11W e una potenza del sistema da 11W a 13W. Fornendo un'uscita LED da 652 lm a 1087 lm e un'uscita di sistema da 444 lm a 883 lm, garantisce una luminosità ottimale per varie applicazioni. Gli angoli del fascio da 8° a 60° consentono una distribuzione precisa della luce, mentre la gamma CCT standard da 2700K a 6000K (3000K tipico) e CRI > 90 offrono un'eccezionale resa cromatica. Con i gradi di protezione IP20 e IP54, è adatto a diversi ambienti. L'azionamento varia da 36V 300mA a 32V 350mA. Le opzioni di controllo includono On/Off, DALI, 0/1-10V TRIAC. Accessori come la feritoia a nido d'ape E01, le lenti E02-spread, E03-diffusion e E04-clear migliorano la personalizzazione e gli eleganti riflettori bianchi, neri o argento completano il suo design moderno.

Reference: System Power - Output Lumen - Delivered Lumen - Beam Angle

Venice T-7.1	B806	11W - 652lm - 444lm - 8°	B807	11W - 951lm - 745lm - 15°	B808	11W - 951lm - 741lm - 24°	B809	11W - 951lm - 773lm - 36°
	B810	11W - 951lm - 636lm - 60°	B811	13W - 721lm - 519lm - 8°	B812	13W - 1087lm - 852lm - 15°	B813	13W - 1087lm - 847lm - 24°
	B814	13W - 1087lm - 883lm - 36°	B815	13W - 1087lm - 728lm - 60°				
Venice T-7.2	B816	11W - 652lm - 444lm - 8°	B817	11W - 951lm - 745lm - 15°	B818	11W - 951lm - 741lm - 24°	B819	11W - 951lm - 773lm - 36°
	B820	11W - 951lm - 636lm - 60°	B821	13W - 721lm - 519lm - 8°	B822	13W - 1087lm - 852lm - 15°	B823	13W - 1087lm - 847lm - 24°
	B824	13W - 1087lm - 883lm - 36°	B825	13W - 1087lm - 728lm - 60°				

Mode	Finish	CCT/CRI		IP	Dim		Emergency	Colour (Reflector)	
TR Trim Version	W - WHITE	K1 - 2700K /90	K2 - 3000K /90	1 - IP20	A - On/Off	B - DALI	Y- Yes	W - WHITE	B - BLACK
TS Trimless Version	B - BLACK	K3 - 3500K /90	K4 - 4000K /90	2 - IP54	C - 0/1-10v	D - TRIAC	N- No	S - SILVER	BC - BLACK CHROME
		K5 - 5000K /90	K6 - 2700-6000K /90		E - BLUETOOT	F - ZIGBEE			
					H CASAMBI				


Code Example

A001 TA W K11 A Y


Enter Your Code:

CODE MODE FINISH CCT IP DIM EMERGENCY


11W/8°/3000K/Ra90




11W/15°/3000K/Ra90




11W/24°/3000K/Ra90




11W/36°/3000K/Ra90




11W/60°/3000K/Ra90




13W/8°/3000K/Ra90




13W/15°/3000K/Ra90




13W/24°/3000K/Ra90



13W/36°/3000K/Ra90



13W/60°/3000K/Ra90



Optical Accessories



Colour(Reflector)

